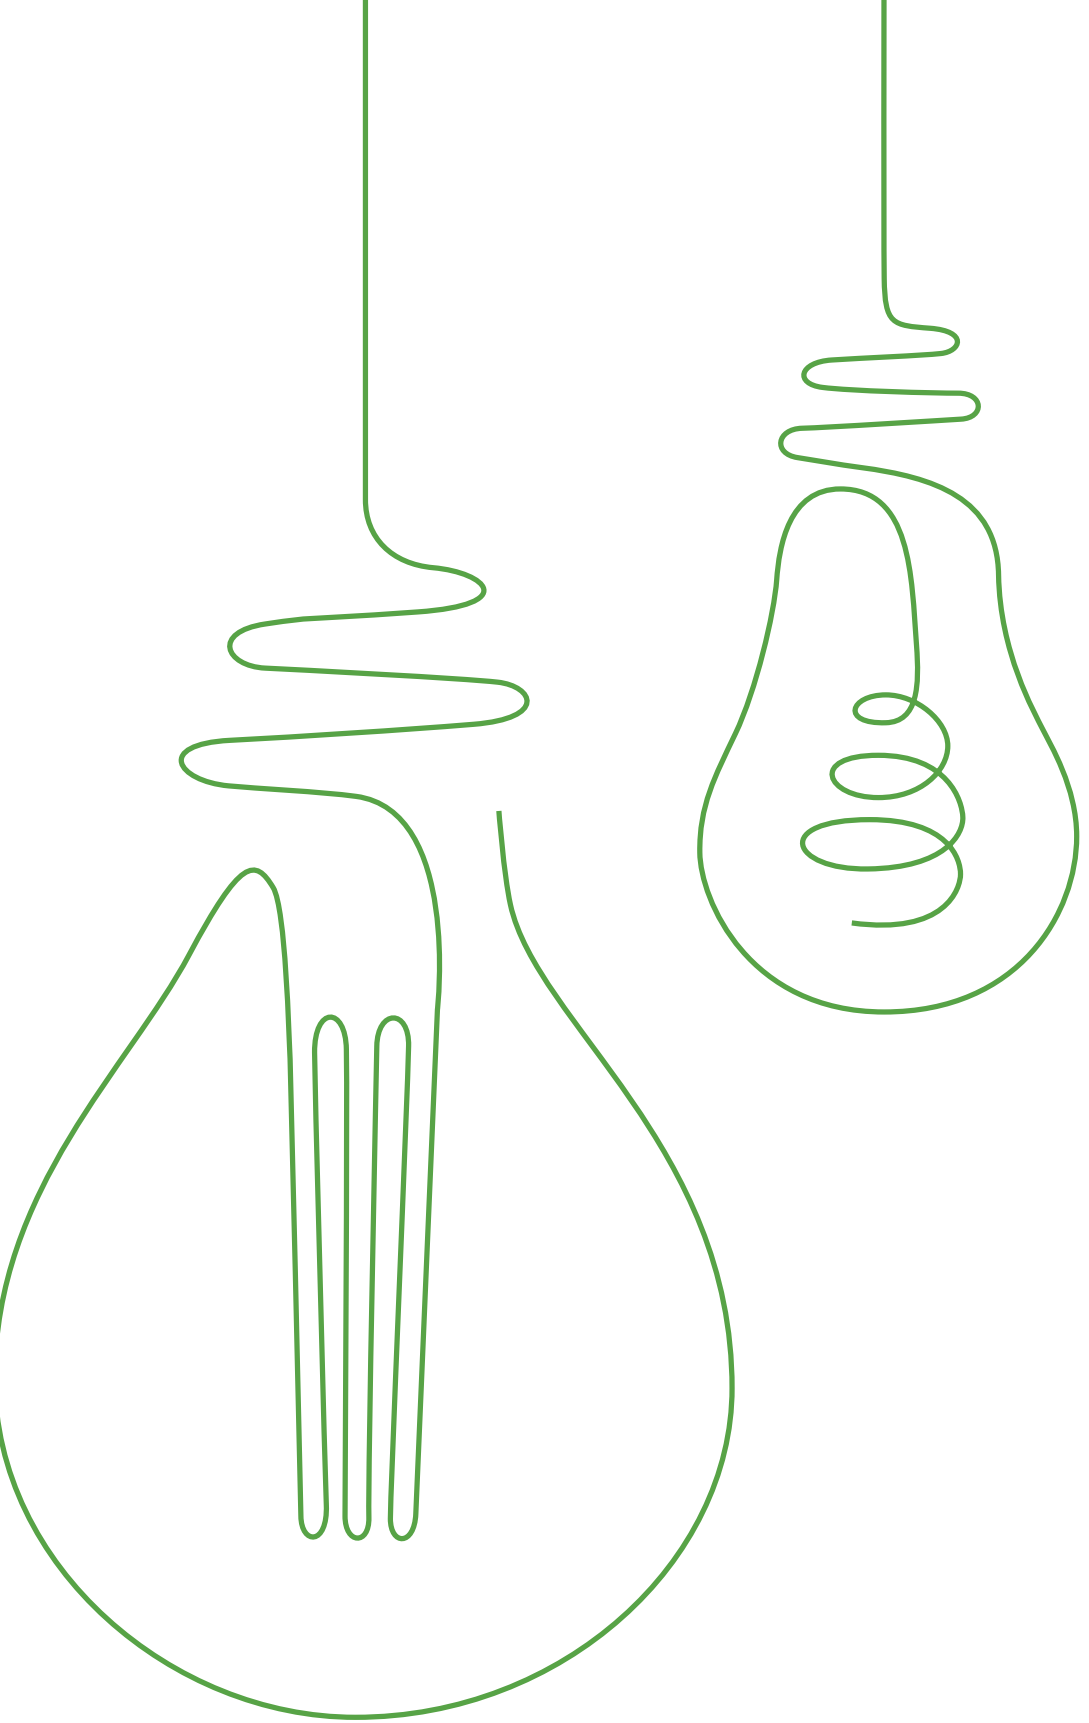








MINALOX®

2025

TRACK LIGHT






CODE: T6101R

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	10W(COB)	3000K 4000K 6000K	90	<u>Reflector</u>	800-900lm
				15°	
				24°	
				38°	
	20W(COB)	3000K 4000K 6000K	90	<u>Reflector</u>	1600-1800lm
				15°	
				24°	
				38°	
	30W(COB)	3000K 4000K 6000K	90	<u>Reflector</u>	2400-2700lm
				15°	
				24°	
				38°	
	40W(COB)	3000K 4000K 6000K	90	<u>Reflector</u>	3200-3600lm
				15°	
				24°	
				38°	

SURFACE SPOT LIGHT







SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	C6101R	10W(COB)	3000K	90	<u>Reflector</u>	800-900lm
			4000K		15°	
			6000K		24°	
			38°			
	C6101R	20W(COB)	3000K	90	<u>Reflector</u>	1600-1800lm
			4000K		15°	
			6000K		24°	
			38°			
	C6101R	30W(COB)	3000K	90	<u>Reflector</u>	2400-2700lm
			4000K		15°	
			6000K		24°	
			38°			
	C6101S	10W(COB)	3000K	90	<u>Reflector</u>	800-900lm
			4000K		15°	
			6000K		24°	
			38°			
	C6101S	20W(COB)	3000K	90	<u>Reflector</u>	1600-1800lm
			4000K		15°	
			6000K		24°	
			38°			

TRACK LIGHT



CODE: T6104

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	10W(COB)	3000K 4000K 6000K	90	<u>Reflector</u> 15°	800-900lm
				24°	
				38°	
	20W(COB)	3000K 4000K 6000K	90	<u>Reflector</u> 15°	1600-1800lm
				24°	
				38°	
	30W(COB)	3000K 4000K 6000K	90	<u>Reflector</u> 15°	2400-2700lm
				24°	
				38°	
	40W(COB)	3000K 4000K 6000K	90	<u>Reflector</u> 15°	3200-3600lm
				24°	
				38°	



TRACK LIGHT
Ultrasonic Wave
Lens



CODE: T6109

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	10W(COB)	3000K	90	<u>Reflector</u> 15°	800-900lm
		4000K		24°	
		6000K		36°	
				55°	
	15W(COB)	3000K	90	<u>Reflector</u> 15°	1200-1350lm
		4000K		24°	
		6000K		36°	
				55°	



SPOT LIGHT
Ultrasonic Wave
Lens



CODE	SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
C6109		10W(COB)	3000K 4000K 6000K	90	<u>Reflector</u> 15°	800-900lm
					24°	
					36°	
					55°	
C6109		15W(COB)	3000K 4000K 6000K	90	<u>Reflector</u> 15°	1200-1350lm
					24°	
					36°	
					55°	
D6109		10W(COB)	3000K 4000K 6000K	90	<u>Reflector</u> 15°	800-900lm
					24°	
					36°	
					55°	
D6109		15W(COB)	3000K 4000K 6000K	90	<u>Reflector</u> 15°	1200-1350lm
					24°	
					36°	
					55°	






TRACK LIGHT

CODE: T6110

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	10W(COB)	3000K	90	Lens 13°	800-900lm
		4000K		24°	
		6000K		38°	
				50°	
	15W(COB)	3000K	90	Lens 13°	1200-1350lm
		4000K		24°	
		6000K		38°	
				50°	

SURFACE
SPOT LIGHT






SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	CS6110R	10W(COB)	3000K	90	<u>Lens</u> 13°	800-900lm
			4000K		24°	
			6000K		38°	
					50°	
	CS6110S	10W(COB)	3000K	90	<u>Lens</u> 13°	800-900lm
			4000K		24°	
			6000K		38°	
					50°	
	CS6110R	15W(COB)	3000K	90	<u>Lens</u> 13°	1200-1350lm
			4000K		24°	
			6000K		38°	
					50°	
	Cs6110	2x15W(COB)	3000K	90	<u>Lens</u> 13°	2400-2700lm
			4000K		24°	
			6000K		38°	
					50°	
	Cs6110	3x15W(COB)	3000K	90	<u>Lens</u> 13°	3600-4050lm
			4000K		24°	
			6000K		38°	
					50°	

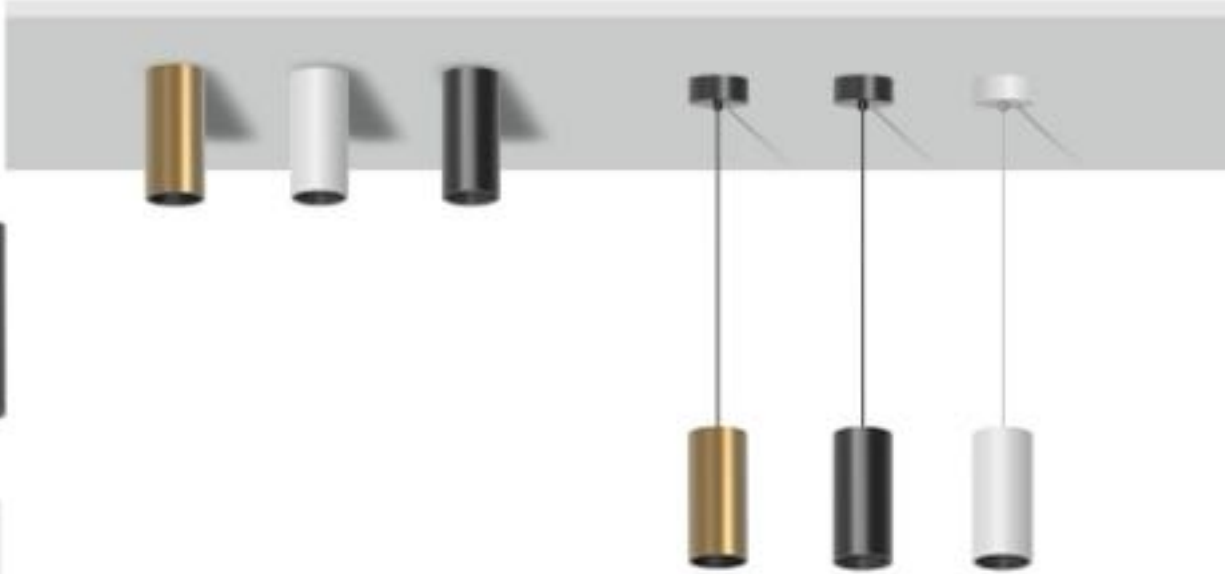






Recessed
SPOT LIGHT



SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	D6110R	10W(COB)	3000K	90	Lens 13°	800-900lm
			4000K		24°	
			6000K		38°	
					50°	
	D6110S	10W(COB)	3000K	90	Lens 13°	800-900lm
			4000K		24°	
			6000K		38°	
					50°	
	D6110R	15W(COB)	3000K	90	Lens 13°	1200-1350lm
			4000K		24°	
			6000K		38°	
					50°	

SURFACE DOWN LIGHT

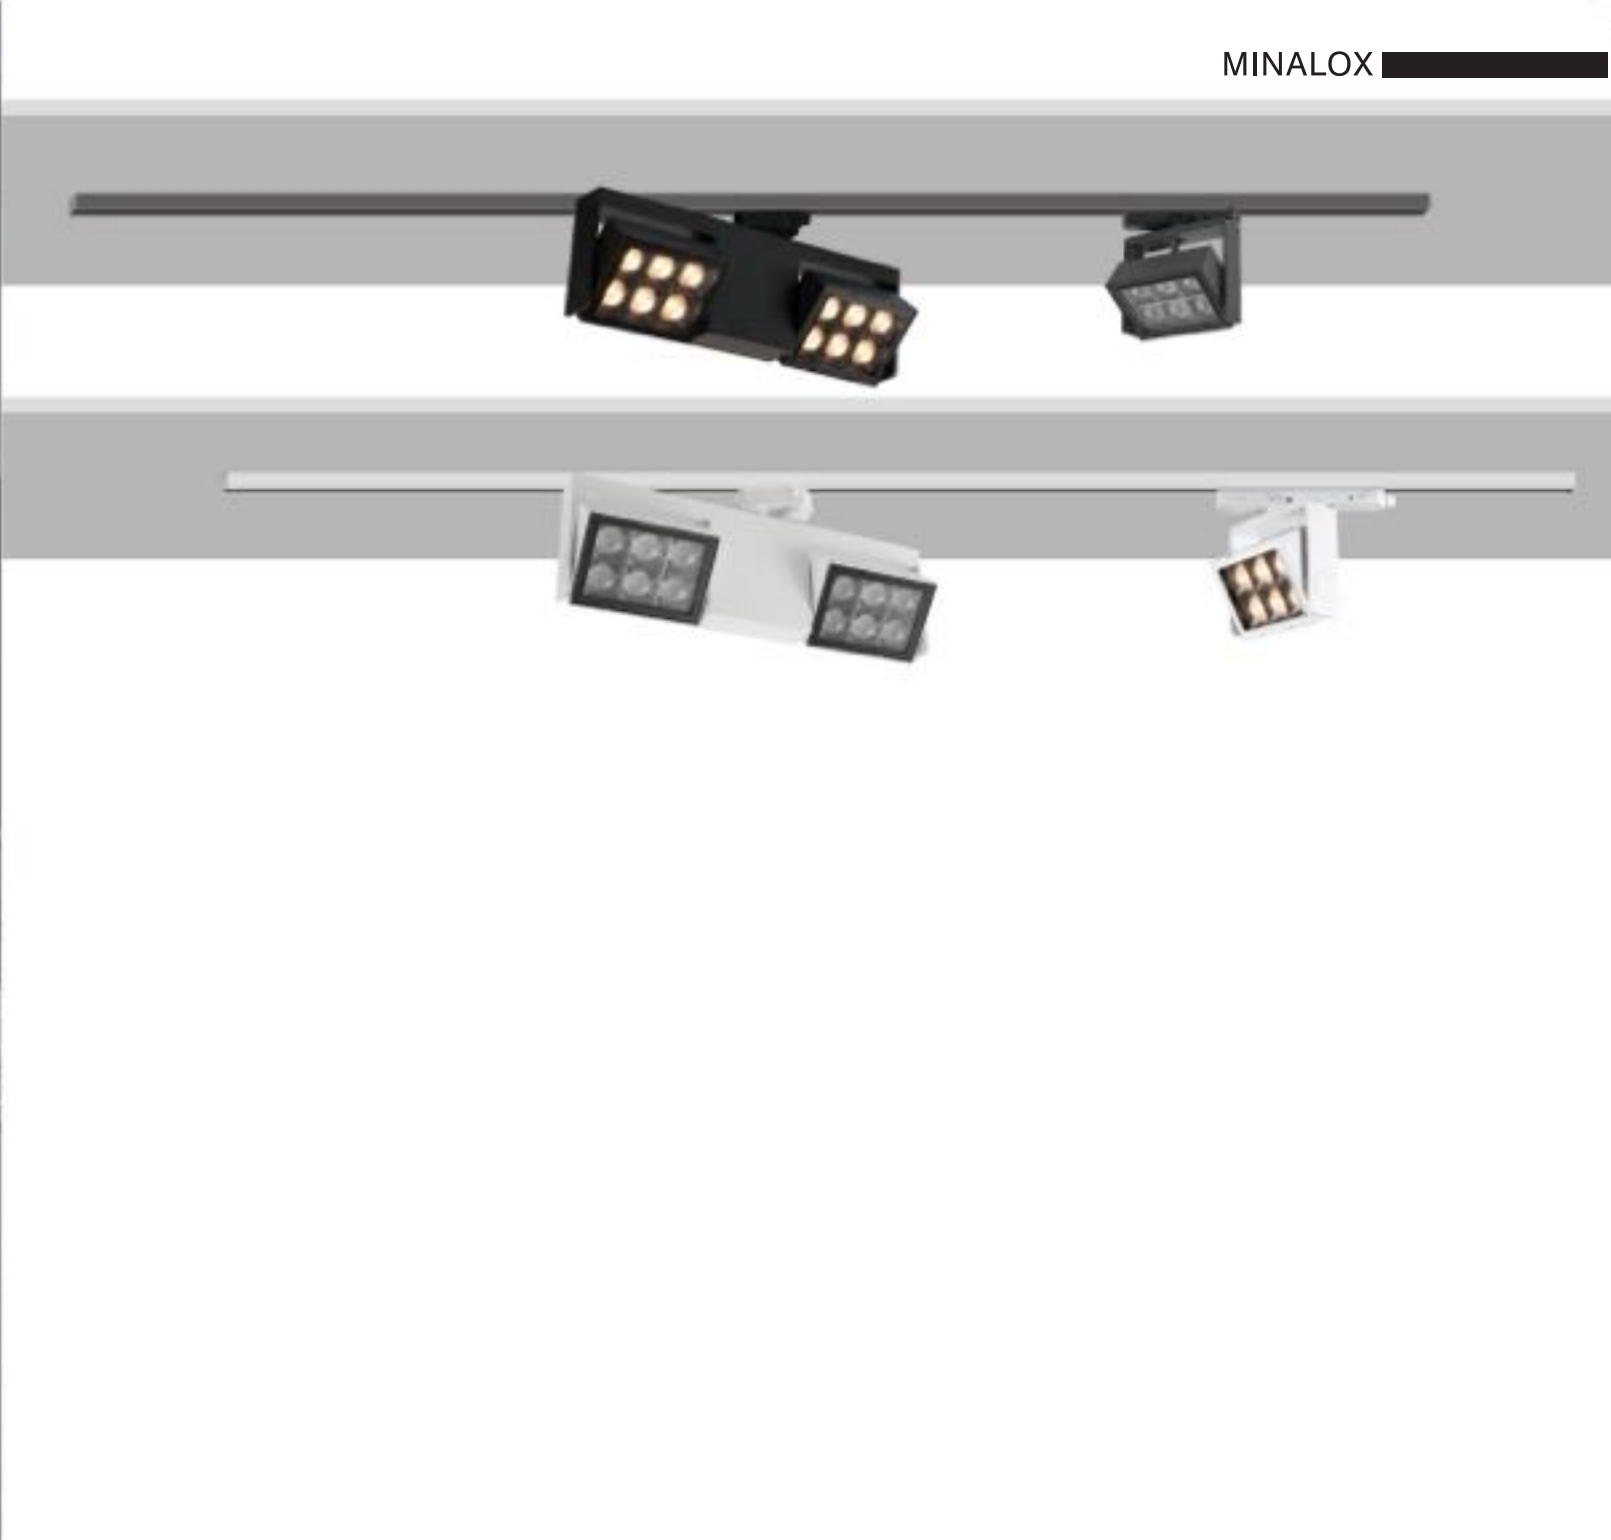


SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	C6110	15W(COB)	3000K	90	<u>Lens</u> 13°	1200-1350lm
			4000K		24°	
			6000K		38°	
					50°	
	Pc6110	15W(COB)	3000K	90	<u>Lens</u> 13°	1200-1350lm
			4000K		24°	
			6000K		38°	
					50°	
	W6110	7W(COB)	3000K	90	<u>Lens</u> 13°	960-1080lm
			4000K		24°	
			6000K		38°	
					50°	
	W6110	2x7W(COB)	3000K	90	<u>Lens</u> 13°	1120-1260lm
			4000K		24°	
			6000K		38°	
					50°	



TRACK LIGHT





Exclusive for exhibition halls



SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	T6102i	30W(SMD)	3000K	90	15°	2400-2700lm
			4000K		24°	
			5000K		38°	
	T6102	2x30W(SMD)	3000K	90	15°	4800-5400lm
			4000K		24°	
			5000K		38°	

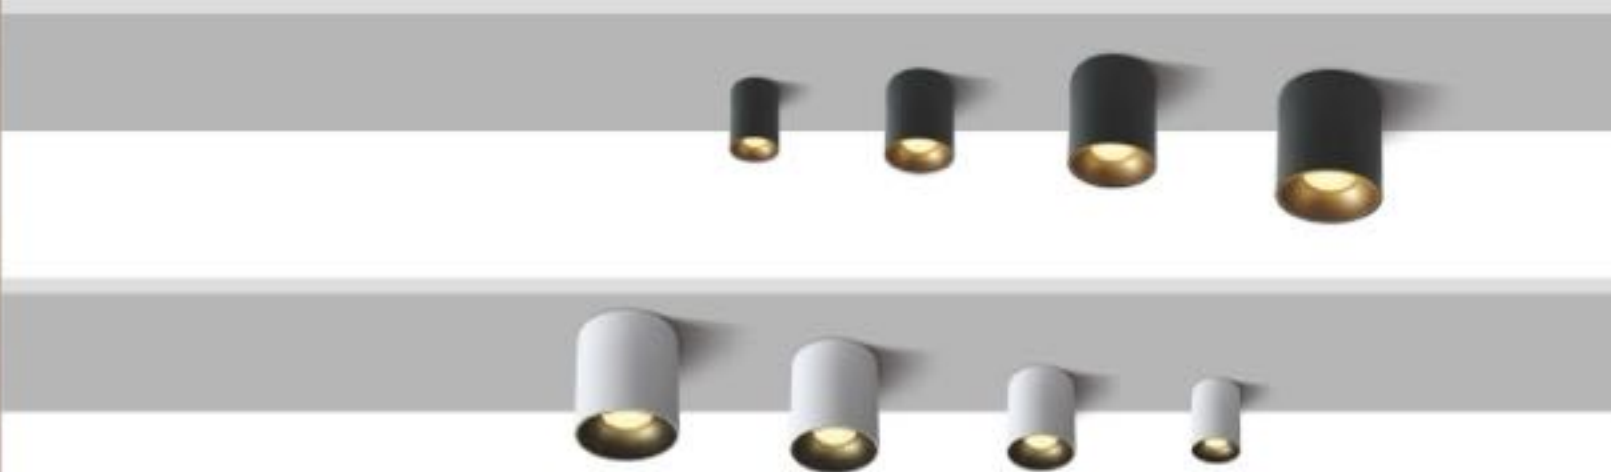
SURFACE
TRACK LIGHT




SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	T3010R	15W(COB)	3000K 4000K 6000K	90	<u>Reflector</u> 15°	1200-1350lm
					24°	
					38°	
	T3010S	15W(COB)	3000K 4000K 6000K	90	<u>Reflector</u> 15°	1200-1350lm
					24°	
					38°	
	C3010R	15W(COB)	3000K 4000K 6000K	90	<u>Reflector</u> 15°	1200-1350lm
					24°	
					38°	
	C3010S	15W(COB)	3000K 4000K 6000K	90	<u>Reflector</u> 15°	1200-1350lm
					24°	
					38°	



SURFACE
DOWNLIGHT

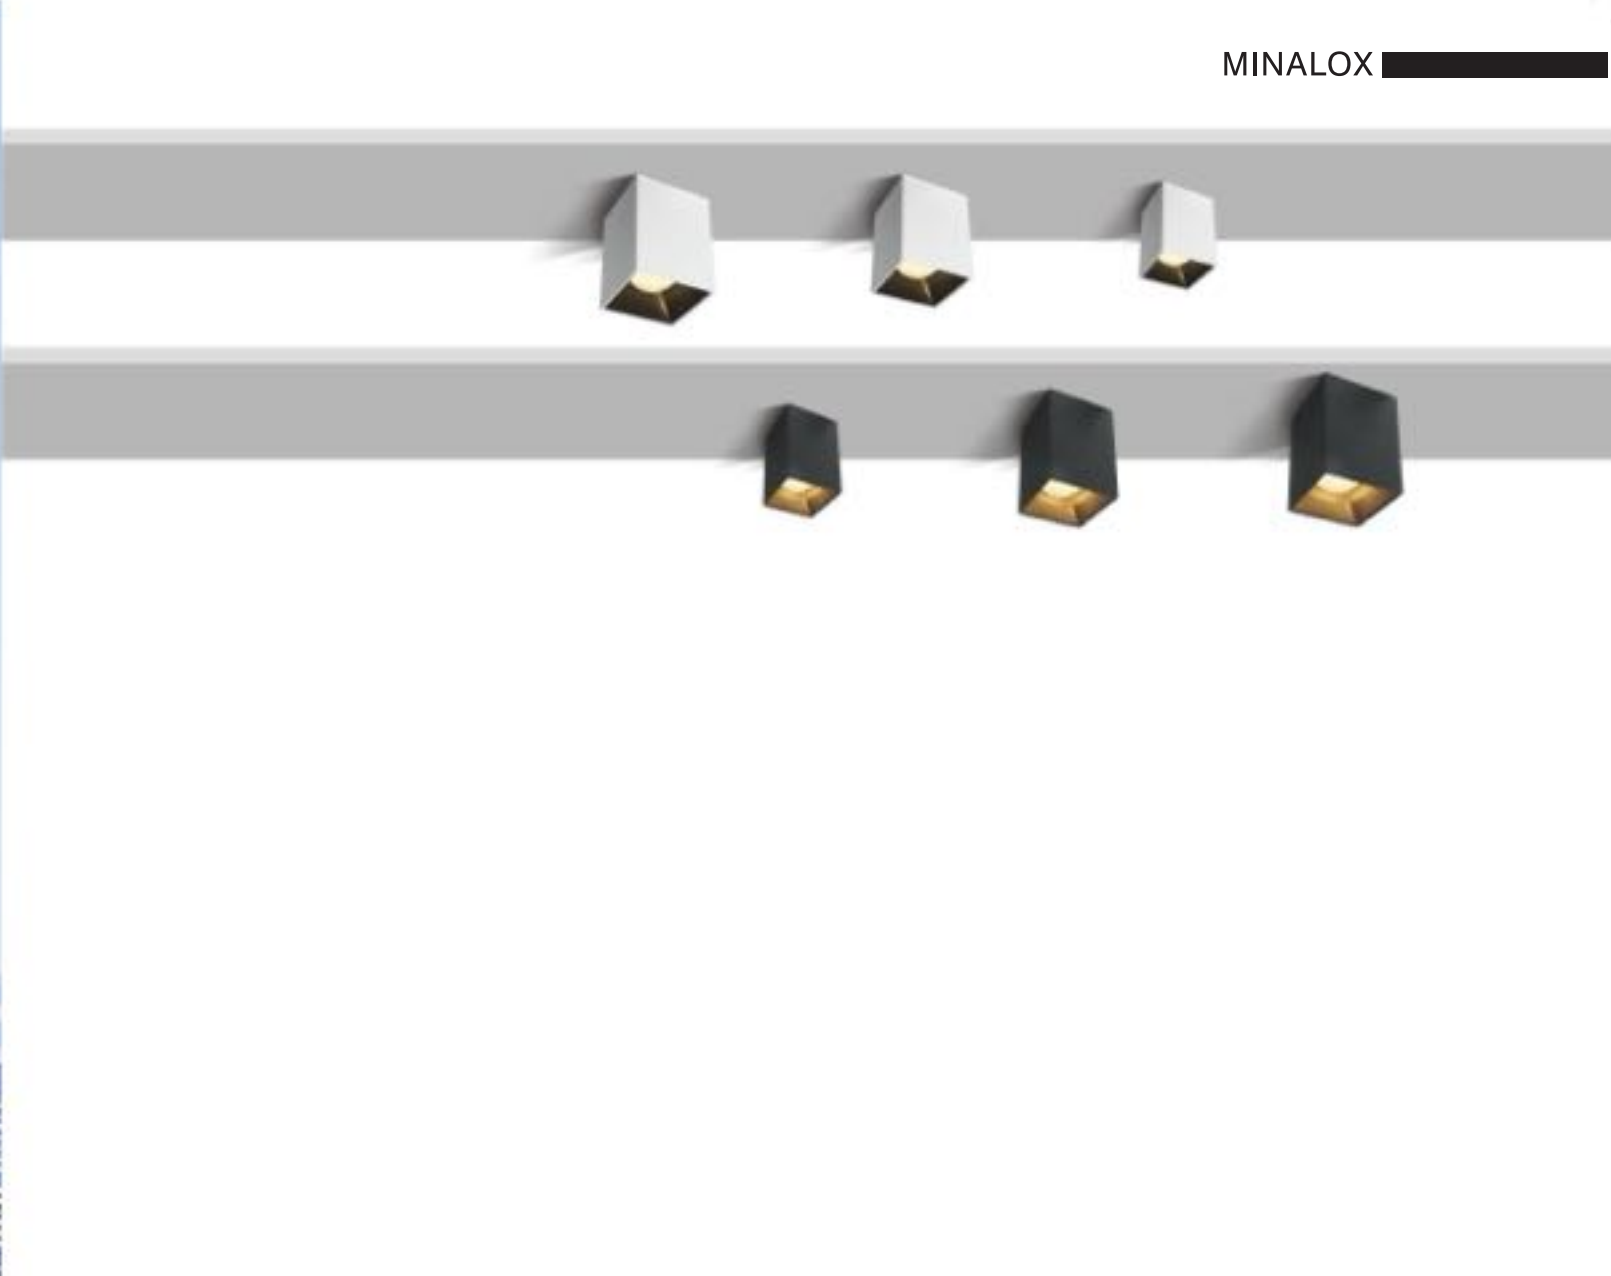


CODE: C3009




SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	7W(COB)	3000K	90	<u>Reflector</u> 15°	560-630lm
		4000K		30°	
		6000K		45°	
	12W(COB)	3000K	90	<u>Reflector</u> 15°	960-1080lm
		4000K		30°	
		6000K		45°	
	20W(COB)	3000K	90	<u>Reflector</u> 15°	1600-1800lm
		4000K		30°	
		6000K		45°	
	30W(COB)	3000K	90	<u>Reflector</u> 15°	2400-2700lm
		4000K		30°	
		6000K		45°	

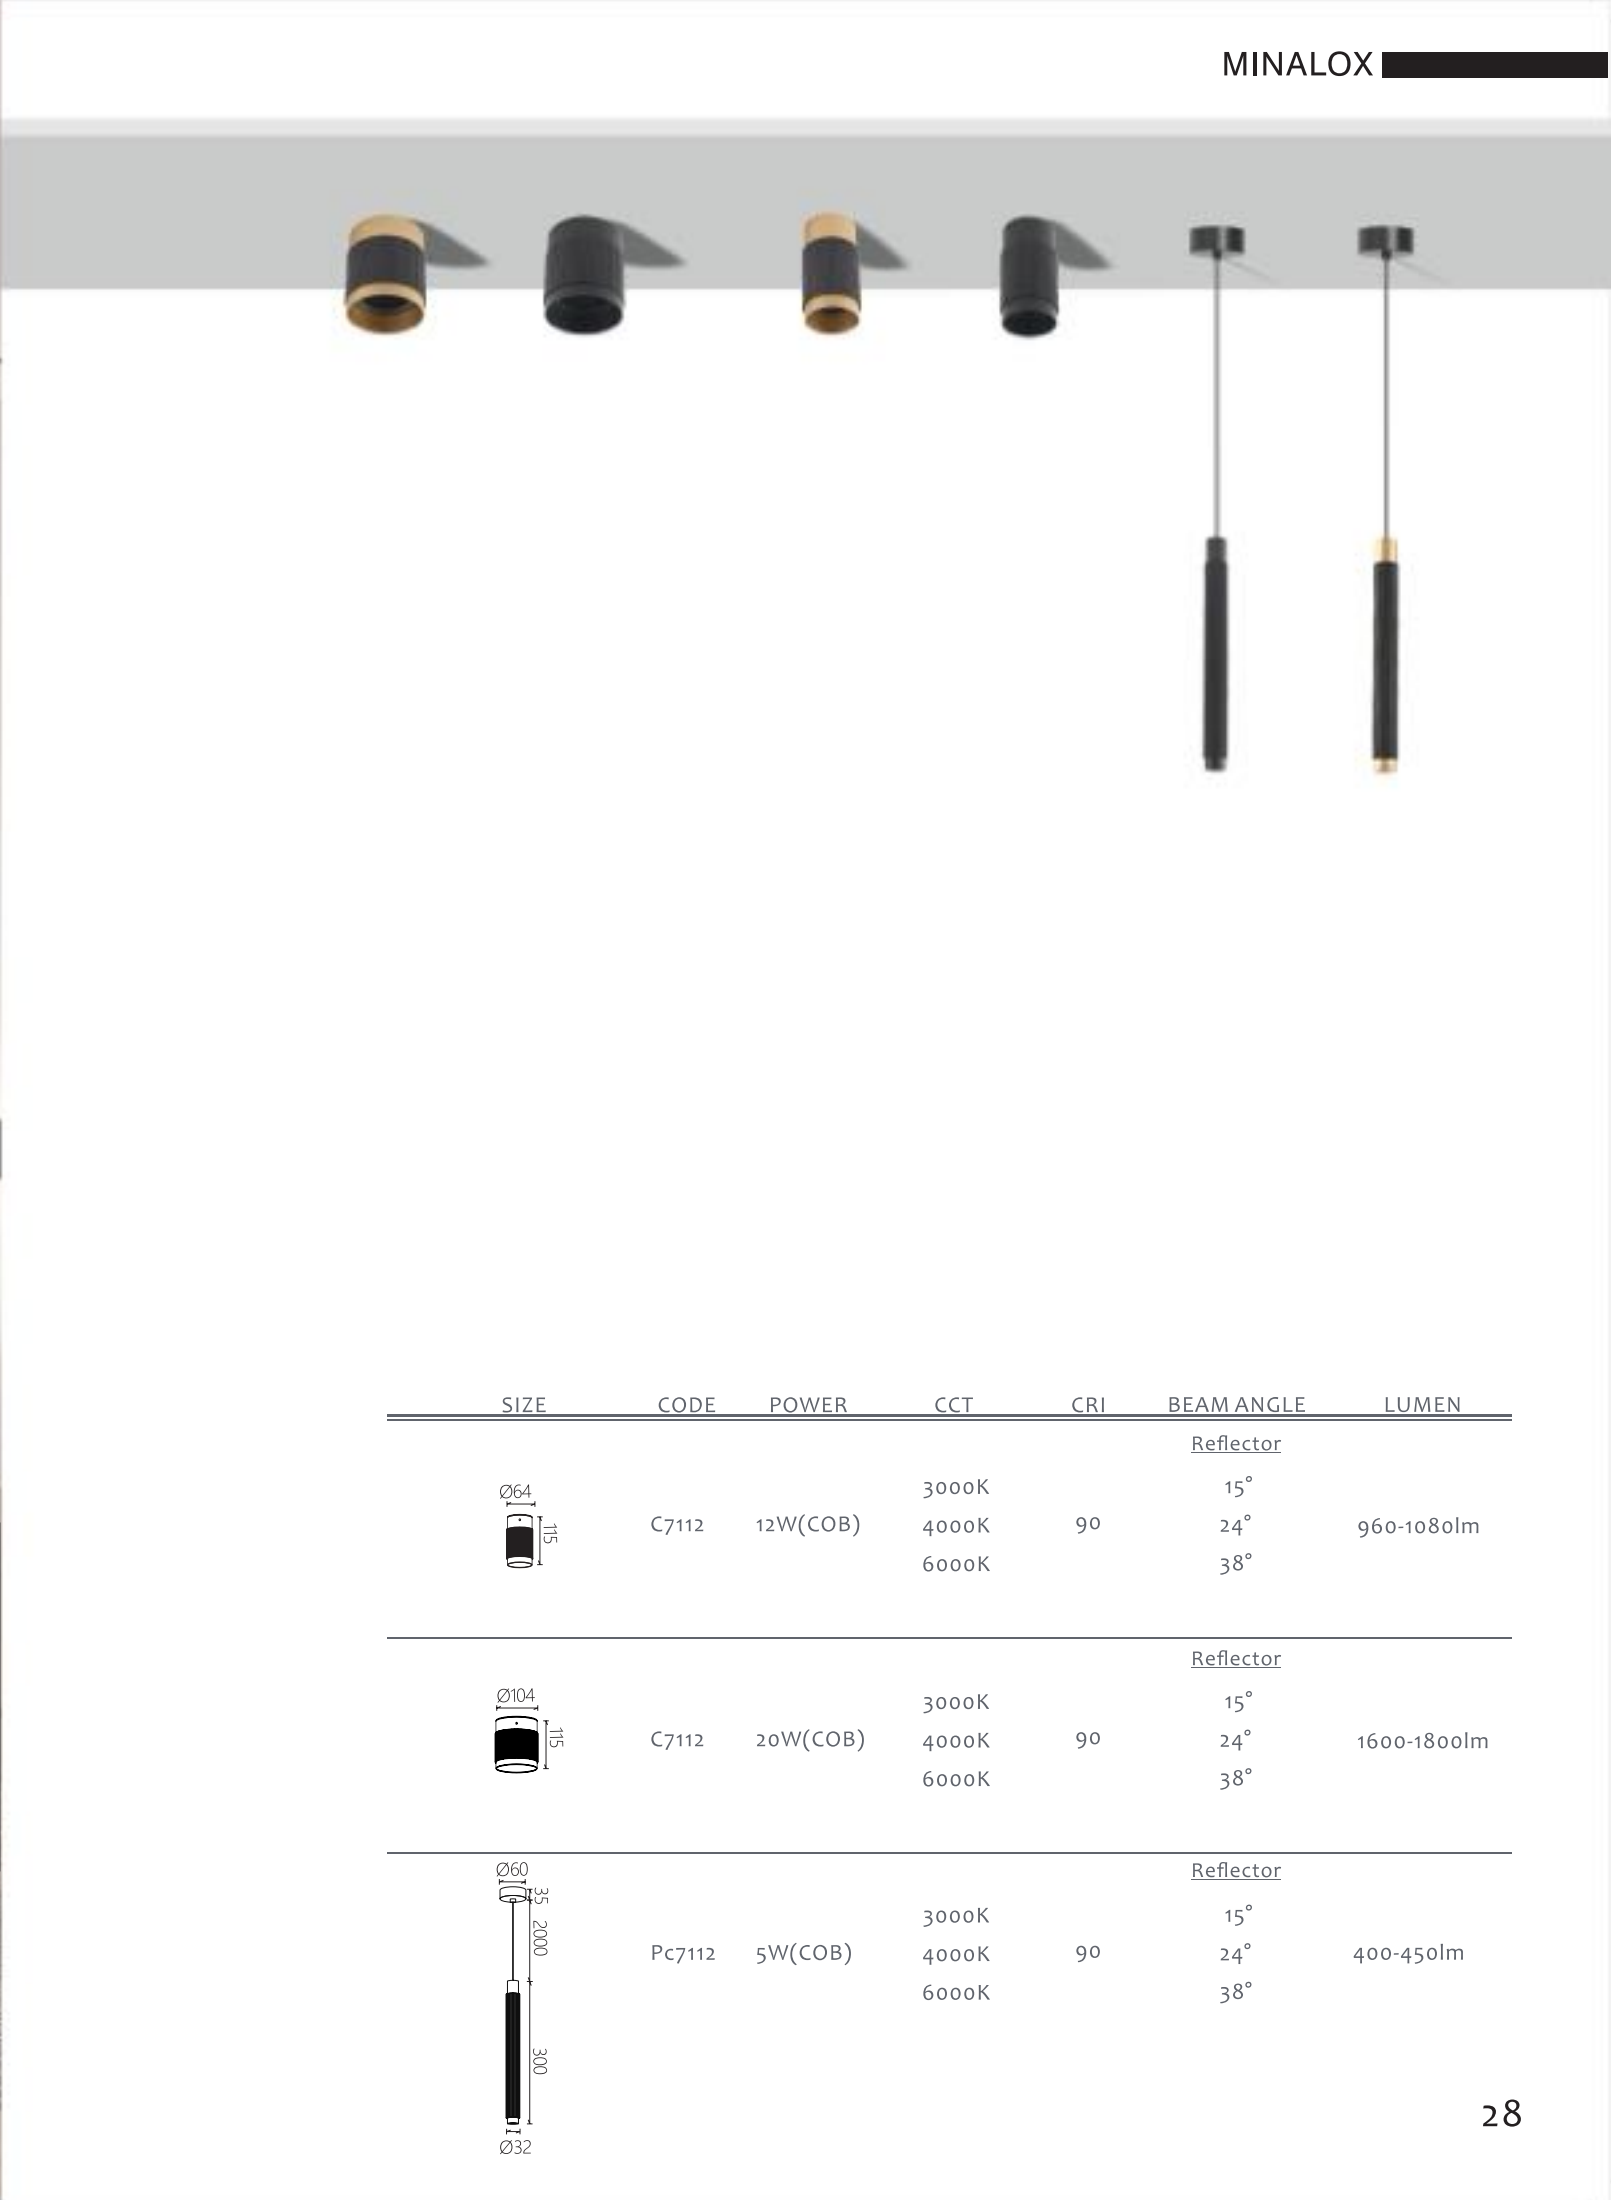



SURFACE
DOWNLIGHT



CODE: C3008

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	12W(COB)	3000K	90	15°	960-1080lm
		4000K		30°	
		6000K		45°	
		<u>Reflector</u>			
	20W(COB)	3000K	90	15°	1600-1800lm
		4000K		30°	
		6000K		45°	
		<u>Reflector</u>			
	30W(COB)	3000K	90	15°	2400-2700lm
		4000K		30°	
		6000K		45°	
		<u>Reflector</u>			



SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	C7112	12W(COB)	3000K	90	Reflector 15°	960-1080lm
			4000K		24°	
			6000K		38°	
	C7112	20W(COB)	3000K	90	Reflector 15°	1600-1800lm
			4000K		24°	
			6000K		38°	
	Pc7112	5W(COB)	3000K	90	Reflector 15°	400-450lm
			4000K		24°	
			6000K		38°	

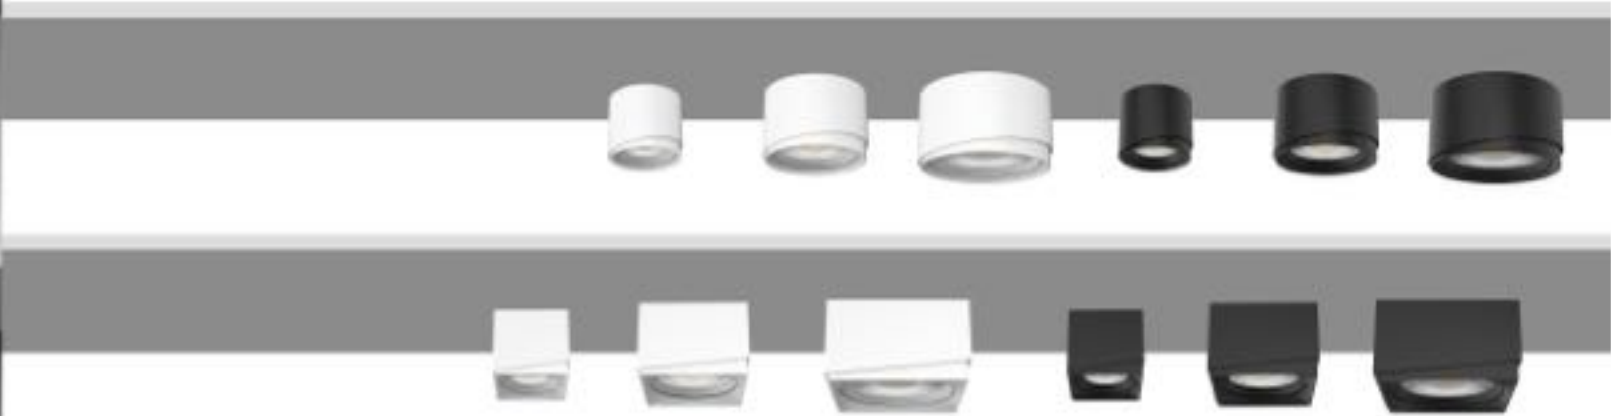
SURFACE
UP &
DOWNLIGHT






CODE : C3019

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	10+2W(COB+SMD)	3000K 4000K 6000K	90	Reflector+Lens	960-1080lm
				15°	
				24°	
				38°	
	18+2W(COB+SMD)	3000K 4000K 6000K	90	Reflector+Lens	1600-1800lm
				15°	
				24°	
				38°	
	28+2W(COB+SMD)	3000K 4000K 6000K	90	Reflector+Lens	2400-2700lm
				15°	
				24°	
				38°	



SURFACE DOWNLIGHT



SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	C3020R	10W(COB)	3000K 4000K 6000K	90	<u>Lens</u> 15° 24° 36° 60°	800-900lm
	C3020R	15W(COB)	3000K 4000K 6000K	90	<u>Lens</u> 15° 24° 36° 60°	1200-1350lm
	C3020R	20W(COB)	3000K 4000K 6000K	90	<u>Lens</u> 15° 24° 36° 60°	1600-1800lm
	C3020S	10W(COB)	3000K 4000K 6000K	90	<u>Lens</u> 15° 24° 36° 60°	800-900lm
	C3020S	15W(COB)	3000K 4000K 6000K	90	<u>Lens</u> 15° 24° 36° 60°	1200-1350lm
	C3020S	20W(COB)	3000K 4000K 6000K	90	<u>Lens</u> 15° 24° 38° 60°	1600-1800lm



360°
Dot Spot








SURFACE SPOT LIGHT



SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	C6111	8W(COB)	3000K 4000K 6000K	90	15° 24° 38°	640-720lm
	C6111L	15W(COB)	3000K 4000K 6000K	90	15° 24° 38°	1200-1350lm
	C6111S	15W(COB)	3000K 4000K 6000K	90	15° 24° 38°	1200-1350lm
	PC6111L	15W(COB)	3000K 4000K 6000K	90	15° 24° 38°	1200-1350lm
	PC6111S	15W(COB)	3000K 4000K 6000K	90	15° 24° 38°	1200-1350lm




RECESSED SPOT LIGHT

SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	S6111	8W(COB)	3000K 4000K 6000K	90	15° 24° 38°	640-720lm
	S6111L	15W(COB)	3000K 4000K 6000K	90	15° 24° 38°	1200-1350lm
	S6111S	15W(COB)	3000K 4000K 6000K	90	15° 24° 38°	1200-1350lm
	PD6111L	15W(COB)	3000K 4000K 6000K	90	15° 24° 38°	1200-1350lm
	PD6111S	15W(COB)	3000K 4000K 6000K	90	15° 24° 38°	1200-1350lm



TRACK
SPOT LIGHT







SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	T6111	8W(COB)	3000K 4000K 6000K	90	15° 24° 38°	640-720lm
	T6111L	15W(COB)	3000K 4000K 6000K	90	15° 24° 38°	1200-1350lm
	T6111S	15W(COB)	3000K 4000K 6000K	90	15° 24° 38°	1200-1350lm

RECESSED
IP65 DOWNLIGHT
(DIFFUSER)







CODE: D3012A(DIFFUSER)

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	15W(SMD)	3000K 4000K 5000K	90	90°	1200-1350lm
	20W(SMD)	3000K 4000K 5000K	90	90°	1600-1800lm
	30W(SMD)	3000K 4000K 5000K	90	90°	2400-2700lm
	40W(SMD)	3000K 4000K 5000K	90	90°	2400-2700lm

RECESSED
IP65 DOWNLIGHT
(REFLECTOR)

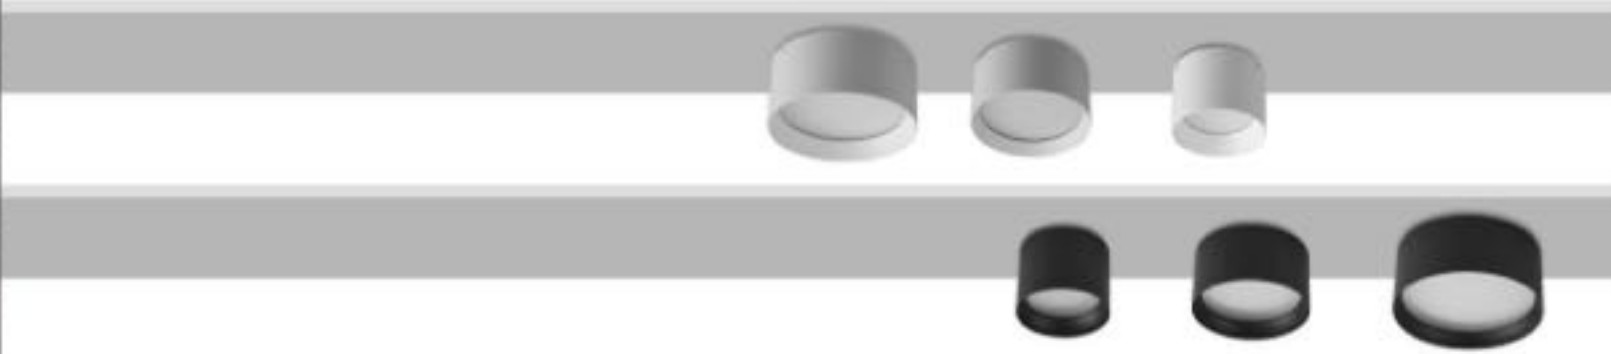


CODE: D3012B(REFLECTOR)



SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	15W(COB)	3000K 4000K 6000K	90	50°	1200-1350lm
	20W(COB)	3000K 4000K 6000K	90	60°	1600-1800lm
	30W(COB)	3000K 4000K 6000K	90	80°	2400-2700lm
	40W(COB)	3000K 4000K 6000K	90	80°	2400-2700lm



SURFACE
IP44 DOWNLIGHT
(DIFFUSER)






CODE: C3012

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	12W(SMD)	3000K 4000K 5000K	90	110°	960-1080lm
	20W(SMD)	3000K 4000K 5000K	90	110°	1600-1800lm
	30W(SMD)	3000K 4000K 5000K	90	110°	2400-2700lm

FRESNEL LENS
High Luminous Efficiency
SMD DOWNLIGHT



CODE : D2061A





SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	5W(SMD)	3000K 4000K 5000K	90	52°	400-450lm
	10W(SMD)	3000K 4000K 5000K	90	52°	800-900lm
	15W(SMD)	3000K 4000K 5000K	90	52°	1200-1350lm
	25W(SMD)	3000K 4000K 5000K	90	52°	2000-2250lm
	35W(SMD)	3000K 4000K 5000K	90	52°	2800-3150lm



IP65
COB DOWNLIGHT

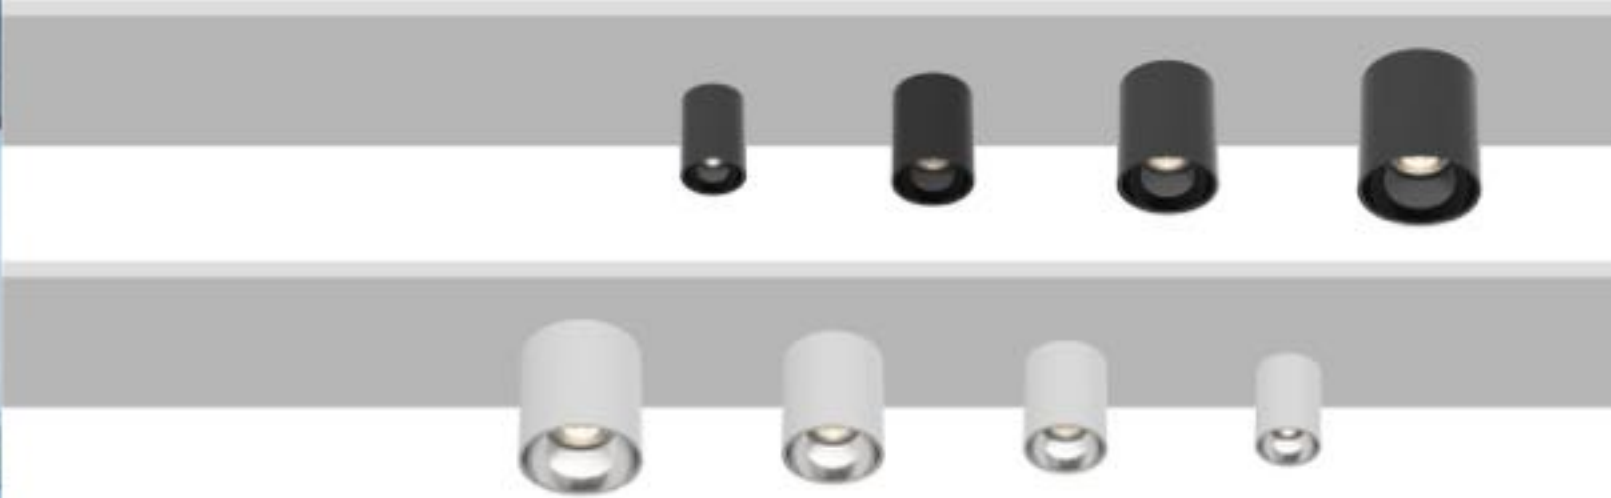


CODE : D2061B



SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	5W(COB)	3000K 4000K 6000K	90	20° 40° 60°	400-450lm
	10W(COB)	3000K 4000K 6000K	90	20° 40° 60°	800-900lm
	15W(COB)	3000K 4000K 6000K	90	20° 40° 60°	1200-1350lm
	25W(COB)	3000K 4000K 6000K	90	20° 40° 60°	2000-2250lm
	35W(COB)	3000K 4000K 6000K	90	20° 40° 60°	2800-3150lm



IP65
COB DOWNLIGHT



CODE : C2061

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	12W	3000K 4000K 6000K	90	20° 40° 60°	960-1080lm
	20W	3000K 4000K 6000K	90	20° 40° 60°	1600-1800lm
	30W	3000K 4000K 6000K	90	20° 40° 60°	2400-2700lm
	40W	3000K 4000K 6000K	90	20° 40° 60°	3200-3600lm

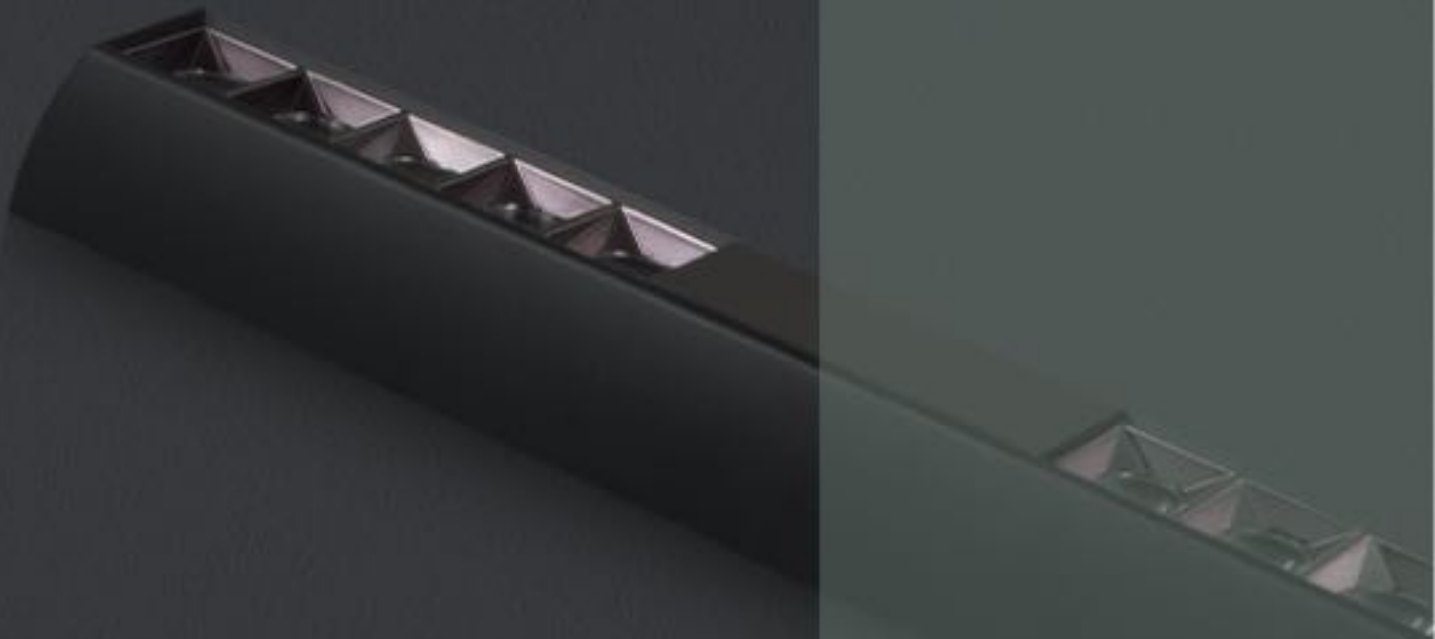


MACARON
SURFACE/WALL LAMP






SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
Ø105mm 205mm 	C3017	10W(SMD)	3000K	90	110°	800-900lm
			4000K			
			5000K			

SURFACE
LINEAR LIGHT







CODE: Xc001

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	20W(SMD)	3000K	90	<u>Lens</u>	1600-1800lm
		4000K		15°	
		5000K		30°	
				45°	
				60°	
	30W(SMD)	3000K	90	<u>Lens</u>	2400-2700lm
		4000K		15°	
		5000K		30°	
				45°	
				60°	
	40W(SMD)	3000K	90	<u>Lens</u>	3200-3600lm
		4000K		15°	
		5000K		30°	
				45°	
				60°	

SURFACE
DOWNLIGHT









CODE: Xc005

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	5W(SMD)	3000K 4000K 5000K	90	50° 80°	400-450lm
	15W(SMD)	3000K 4000K 5000K	90	50° 80°	1200-1350lm
	30W(SMD)	3000K 4000K 5000K	90	50° 80°	2400-2700lm
	20W(SMD)	3000K 4000K 5000K	90	50° 80°	1600-1800lm

RECESSED
DOWNLIGHT



CODE:XL005



SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	5W(SMD)	3000K 4000K 5000K	90	50° 80°	400-450lm
	12W(SMD)	3000K 4000K 5000K	90	50° 80°	960-1080lm
	20W(SMD)	3000K 4000K 5000K	90	50° 80°	1600-1800lm
	40W(SMD)	3000K 4000K 5000K	90	50° 80°	3200-3600lm
	16W(SMD)	3000K 4000K 5000K	90	50° 80°	1280-1440lm
	36W(SMD)	3000K 4000K 5000K	90	50° 80°	2880-3240lm



RECESSED
SPOT LIGHT






CODE:XS005

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	12W(SMD)	3000K 4000K 5000K	90	50° 80°	960-1080lm
	20W(SMD)	3000K 4000K 5000K	90	50° 80°	1600-1800lm

SURFACE
LINEAR LIGHT







CODE: Xc003

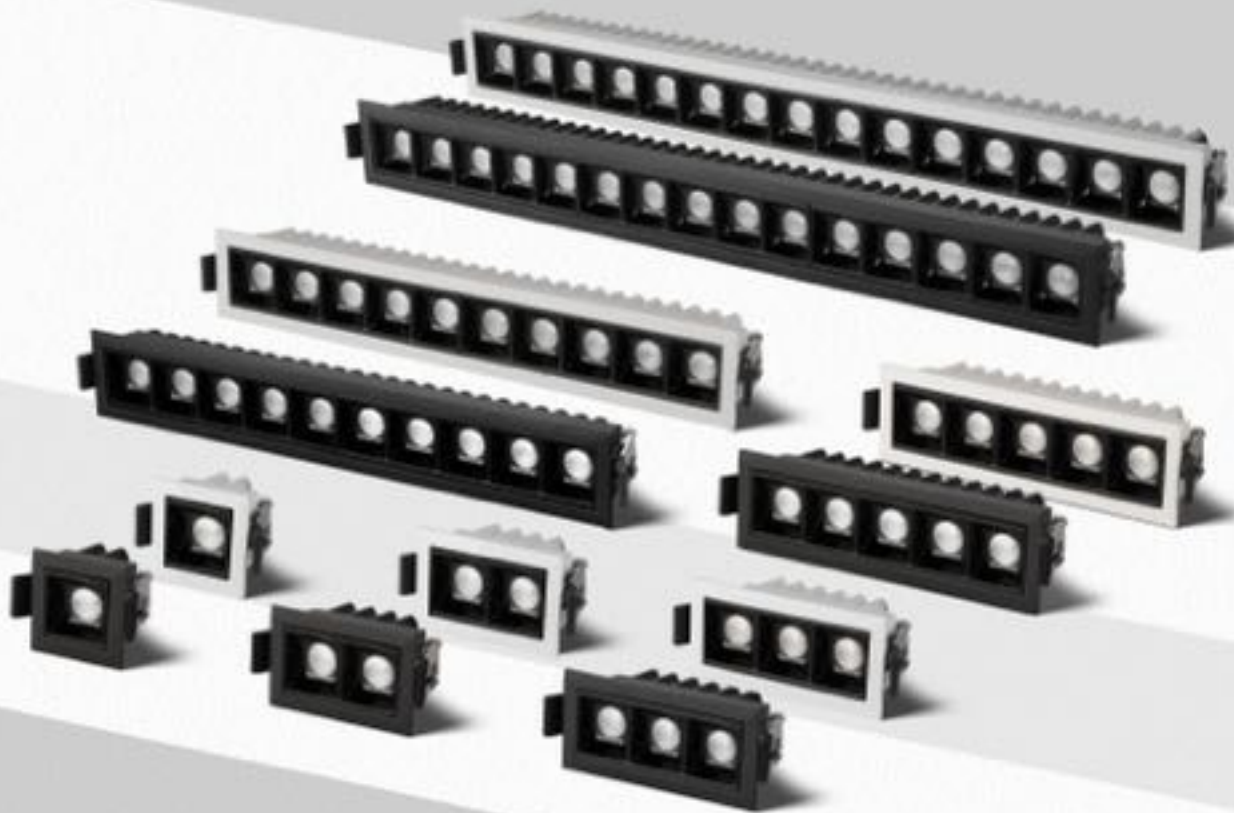
SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	5W(SMD)	3000K	90	<u>Lens</u>	400-450lm
		4000K		15°	
		5000K		30°	
				45°	
				60°	
	15W(SMD)	3000K	90	<u>Lens</u>	1200-1350lm
		4000K		15°	
		5000K		30°	
				45°	
				60°	
	30W(SMD)	3000K	90	<u>Lens</u>	2400-2700lm
		4000K		15°	
		5000K		30°	
				45°	
				60°	

R

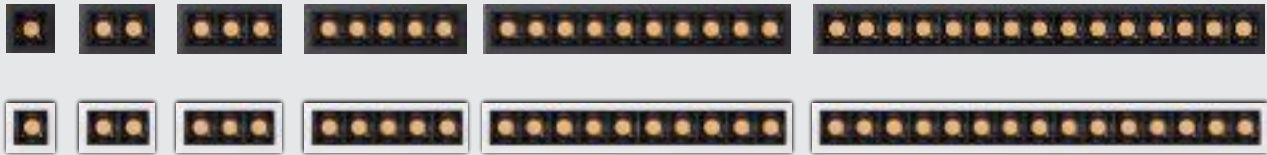
ecessed LINEAR LIGHT

CODE: XL003

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	5W(SMD)	3000K	90	<u>Lens</u> 15°	400-450lm
		4000K		30°	
		5000K		45°	
				60°	
	12W(SMD)	3000K	90	<u>Lens</u> 15°	960-1080lm
		4000K		30°	
		5000K		45°	
				60°	
	20W(SMD)	3000K	90	<u>Lens</u> 15°	1600-1800lm
		4000K		30°	
		5000K		45°	
				60°	
	40W(SMD)	3000K	90	<u>Lens</u> 15°	3200-3600lm
		4000K		30°	
		5000K		45°	
				60°	
	16W(SMD)	3000K	90	<u>Lens</u> 15°	1280-1440lm
		4000K		30°	
		5000K		45°	
				60°	
	36W(SMD)	3000K	90	<u>Lens</u> 15°	2880-3240lm
		4000K		30°	
		5000K		45°	
				60°	



Recessed LINEAR LIGHT

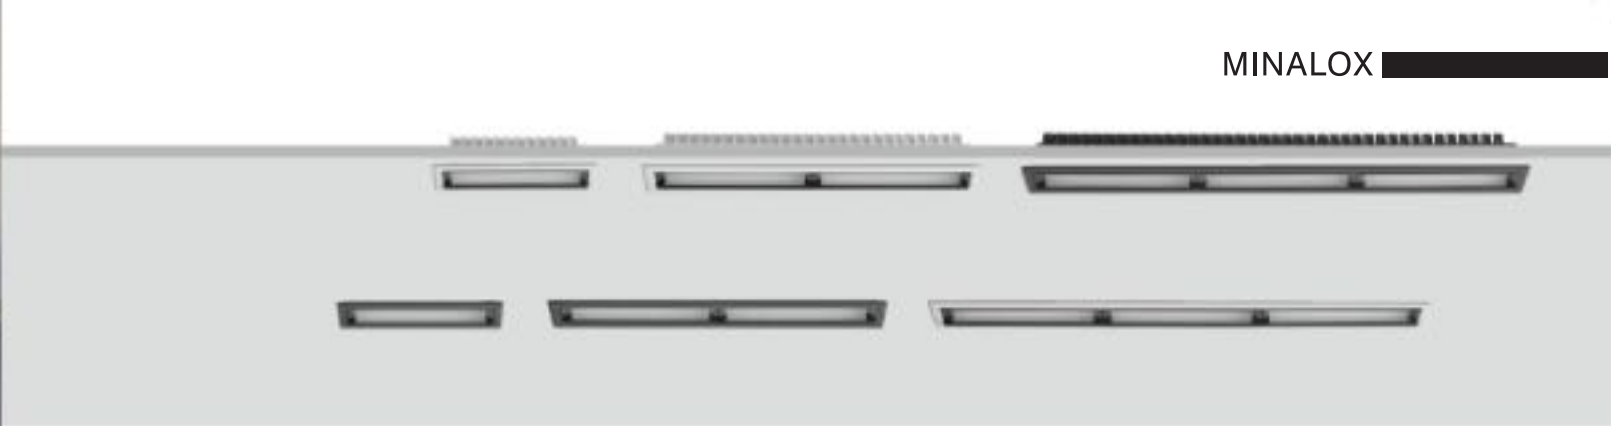


CODE: XL001




SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
45×45 47 Ø35×35	3W(SMD)	3000K 4000K 5000K	90	15° 30° 45°	240-270lm
76×45 47 Ø70×35	6W(SMD)	3000K 4000K 5000K	90	15° 30° 45°	480-540lm
106×45 47 Ø100×35	9W(SMD)	3000K 4000K 5000K	90	15° 30° 45°	720-810lm
147×45 47 Ø140×35	12W(SMD)	3000K 4000K 5000K	90	15° 30° 45°	960-1080lm
281×45 47 Ø274×35	24W(SMD)	3000K 4000K 5000K	90	15° 30° 45°	1920-2160lm
413×45 47 Ø406×35	36W(SMD)	3000K 4000K 5000K	90	15° 30° 45°	2880-3240lm



90° SideView LED
R
ecessed
LINEAR LIGHT



CODE: XL002

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	12W(SMD)	3000K 4000K 5000K	90	WALL WASHER	960-1080lm
	24W(SMD)	3000K 4000K 5000K	90	WALL WASHER	1920-2160lm
	36W(SMD)	3000K 4000K 5000K	90	WALL WASHER	2880-3240lm

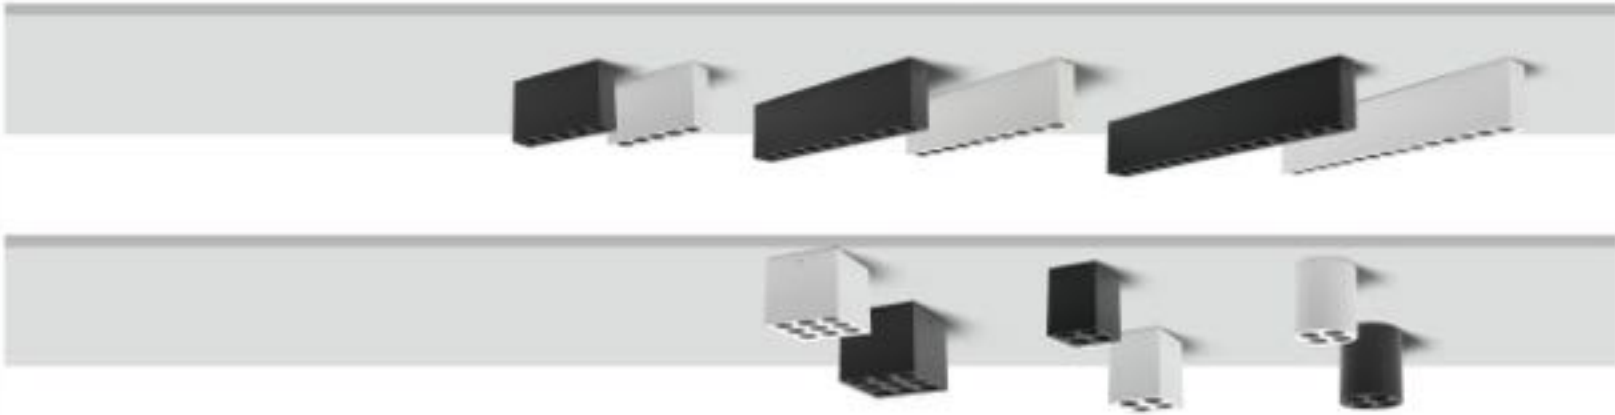
SURFACE

LINEAR LIGHT



SCREW FREE DESIGN

INBUILT MECHANICAL CONSTRUCTION



SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	XC004	12W(SMD)	3000K	90	<u>Lens</u> 15°	960-1080lm
			4000K		24°	
			5000K		38°	
	XC004	24W(SMD)	3000K	90	<u>Lens</u> 15°	1920-2160lm
			4000K		24°	
			5000K		38°	
	XC004	36W(SMD)	3000K	90	<u>Lens</u> 15°	2880-3240lm
			4000K		24°	
			5000K		38°	
	XC004R	10W(SMD)	3000K	90	<u>Lens</u> 15°	800-900lm
			4000K		24°	
			5000K		38°	
	XC004S	10W(SMD)	3000K	90	<u>Lens</u> 15°	800-900lm
			4000K		24°	
			5000K		38°	
	XC004S	22W(SMD)	3000K	90	<u>Lens</u> 15°	1760-1980lm
			4000K		24°	
			5000K		38°	



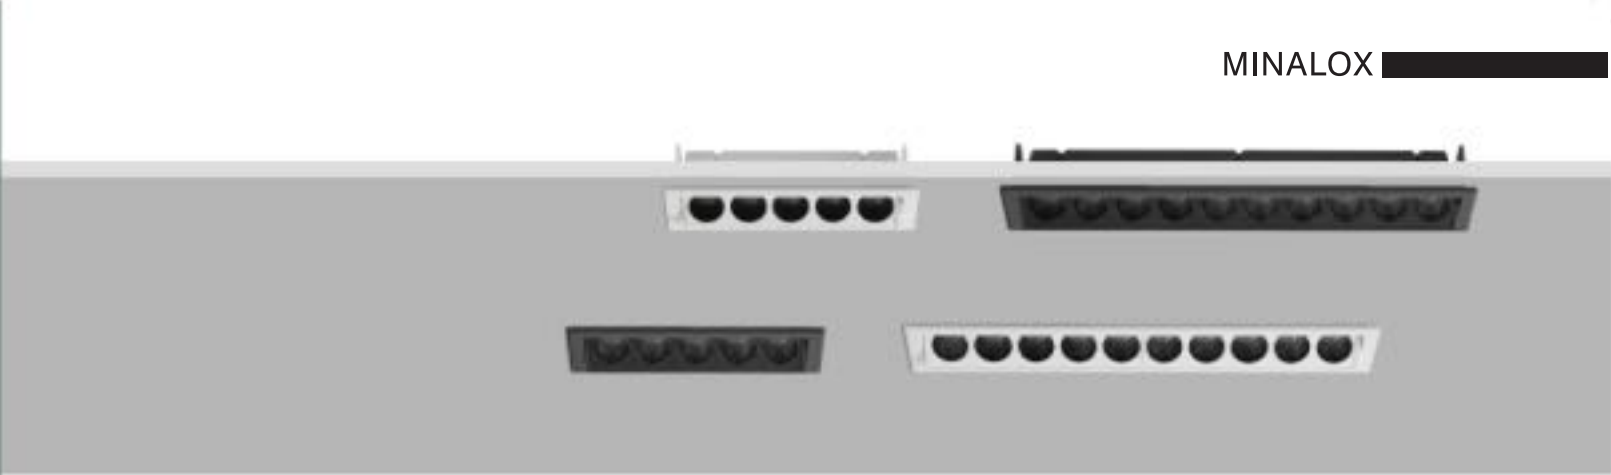
R

ecessed
LINEAR LIGHT


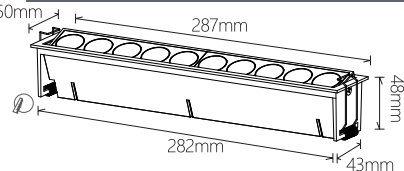
SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
<u>Lens</u>						
	XL004	3W(SMD)	3000K 4000K 5000K	90	15°	210-240lm
<u>Lens</u>						
	XL004	6W(SMD)	3000K 4000K 5000K	90	15° 24° 38°	480-540lm
<u>Lens</u>						
	XL004	12W(SMD)	3000K 4000K 5000K	90	15° 24° 38°	960-1080lm
<u>Lens</u>						
	XL004	24W(SMD)	3000K 4000K 5000K	90	15° 24° 38°	1920-2160lm
<u>Lens</u>						
	XD004S	10W(SMD)	3000K 4000K 5000K	90	15° 24° 38°	800-900lm
<u>Lens</u>						
	XD004R	10W(SMD)	3000K 4000K 5000K	90	15° 24° 38°	800-900lm

R

ecessed
LINEAR SPOT LIGHT








CODE:XS004

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	12W(SMD)	3000K	90	Lens 15°	960-1080lm
		4000K		24°	
		5000K		38°	
	24W(SMD)	3000K	90	Lens 15°	1920-2160lm
		4000K		24°	
		5000K		38°	



TRIMLESS
LINEAR LIGHT






SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	XT004	6W(SMD)	3000K	90	Lens 15°	480-540lm
			4000K		24°	
			5000K		38°	
	XT004	12W(SMD)	3000K	90	Lens 15°	960-1080lm
			4000K		24°	
			5000K		38°	
	XT004	24W(SMD)	3000K	90	Lens 15°	1920-2160lm
			4000K		24°	
			5000K		38°	
	XT004S	10W(SMD)	3000K	90	Lens 15°	800-900lm
			4000K		24°	
			5000K		38°	
	XT004R	10W(SMD)	3000K	90	Lens 15°	800-900lm
			4000K		24°	
			5000K		38°	





IP65 LINEAR LIGHTS

IP65




SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	XC004R-IP65	10W(SMD)	3000K	90	<u>Lens</u> 15°	800-900lm
			4000K		24°	
			5000K		38°	
	XC004S-IP65	10W(SMD)	3000K	90	<u>Lens</u> 15°	800-900lm
			4000K		24°	
			5000K		38°	
	XC004S-IP65	22W(SMD)	3000K	90	<u>Lens</u> 15°	1760-1980lm
			4000K		24°	
			5000K		38°	



IP65





SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	XW004R-IP65	10W(SMD)	3000K	90	<u>Lens</u> 15°	800-900lm
			4000K		24°	
			5000K		38°	
	XW004S-IP65	10W(SMD)	3000K	90	<u>Lens</u> 15°	800-900lm
			4000K		24°	
			5000K		38°	

IP65

SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	XL004-IP65	12W(SMD)	3000K	90	<u>Lens</u> 15°	960-1080lm
			4000K		24°	
			5000K		38°	
	XW004-IP65	12W(SMD)	3000K	90	<u>Lens</u> 15°	960-1080lm
			4000K		24°	
			5000K		38°	
	XC004-IP65	12W(SMD)	3000K	90	<u>Lens</u> 15°	960-1080lm
			4000K		24°	
			5000K		38°	





SURFACE
LINEAR
DOWNLIGHT

CODE:XC006

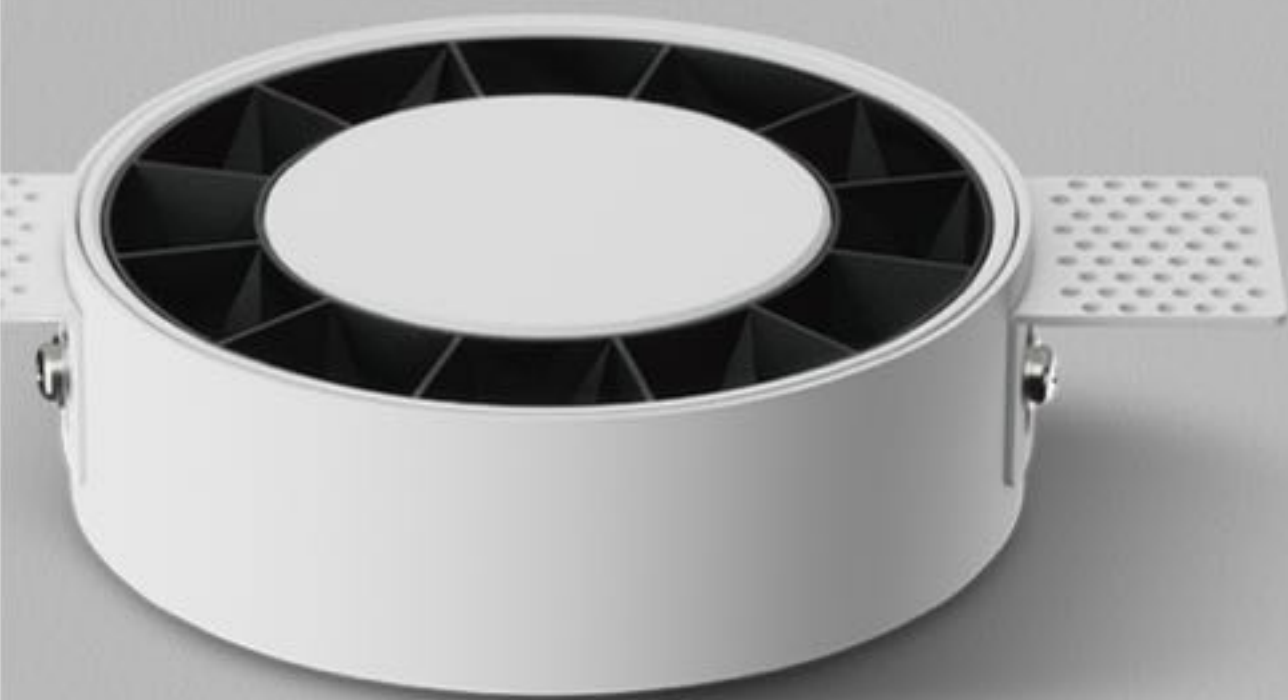
SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	7W(SMD)	3000K	90	<u>Lens</u>	560-630lm
		4000K		24°	
		5000K		45°	
	12W(SMD)	3000K	90	<u>Lens</u>	960-1080lm
		4000K		24°	
		5000K		45°	
	18W(SMD)	3000K	90	<u>Lens</u>	1440-1620lm
		4000K		24°	
		5000K		45°	
	24W(SMD)	3000K	90	<u>Lens</u>	1920-2160lm
		4000K		24°	
		5000K		45°	

Recessed LINEAR DOWNLIGHT





CODE:XD006

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	7W(SMD)	3000K	90	Lens	560-630lm
		4000K		24°	
		5000K		45°	
	12W(SMD)	3000K	90	Lens	960-1080lm
		4000K		24°	
		5000K		45°	
	18W(SMD)	3000K	90	Lens	1440-1620lm
		4000K		24°	
		5000K		45°	
	24W(SMD)	3000K	90	Lens	1920-2160lm
		4000K		24°	
		5000K		45°	

TRIMLESS LINEAR DOWNLIGHT




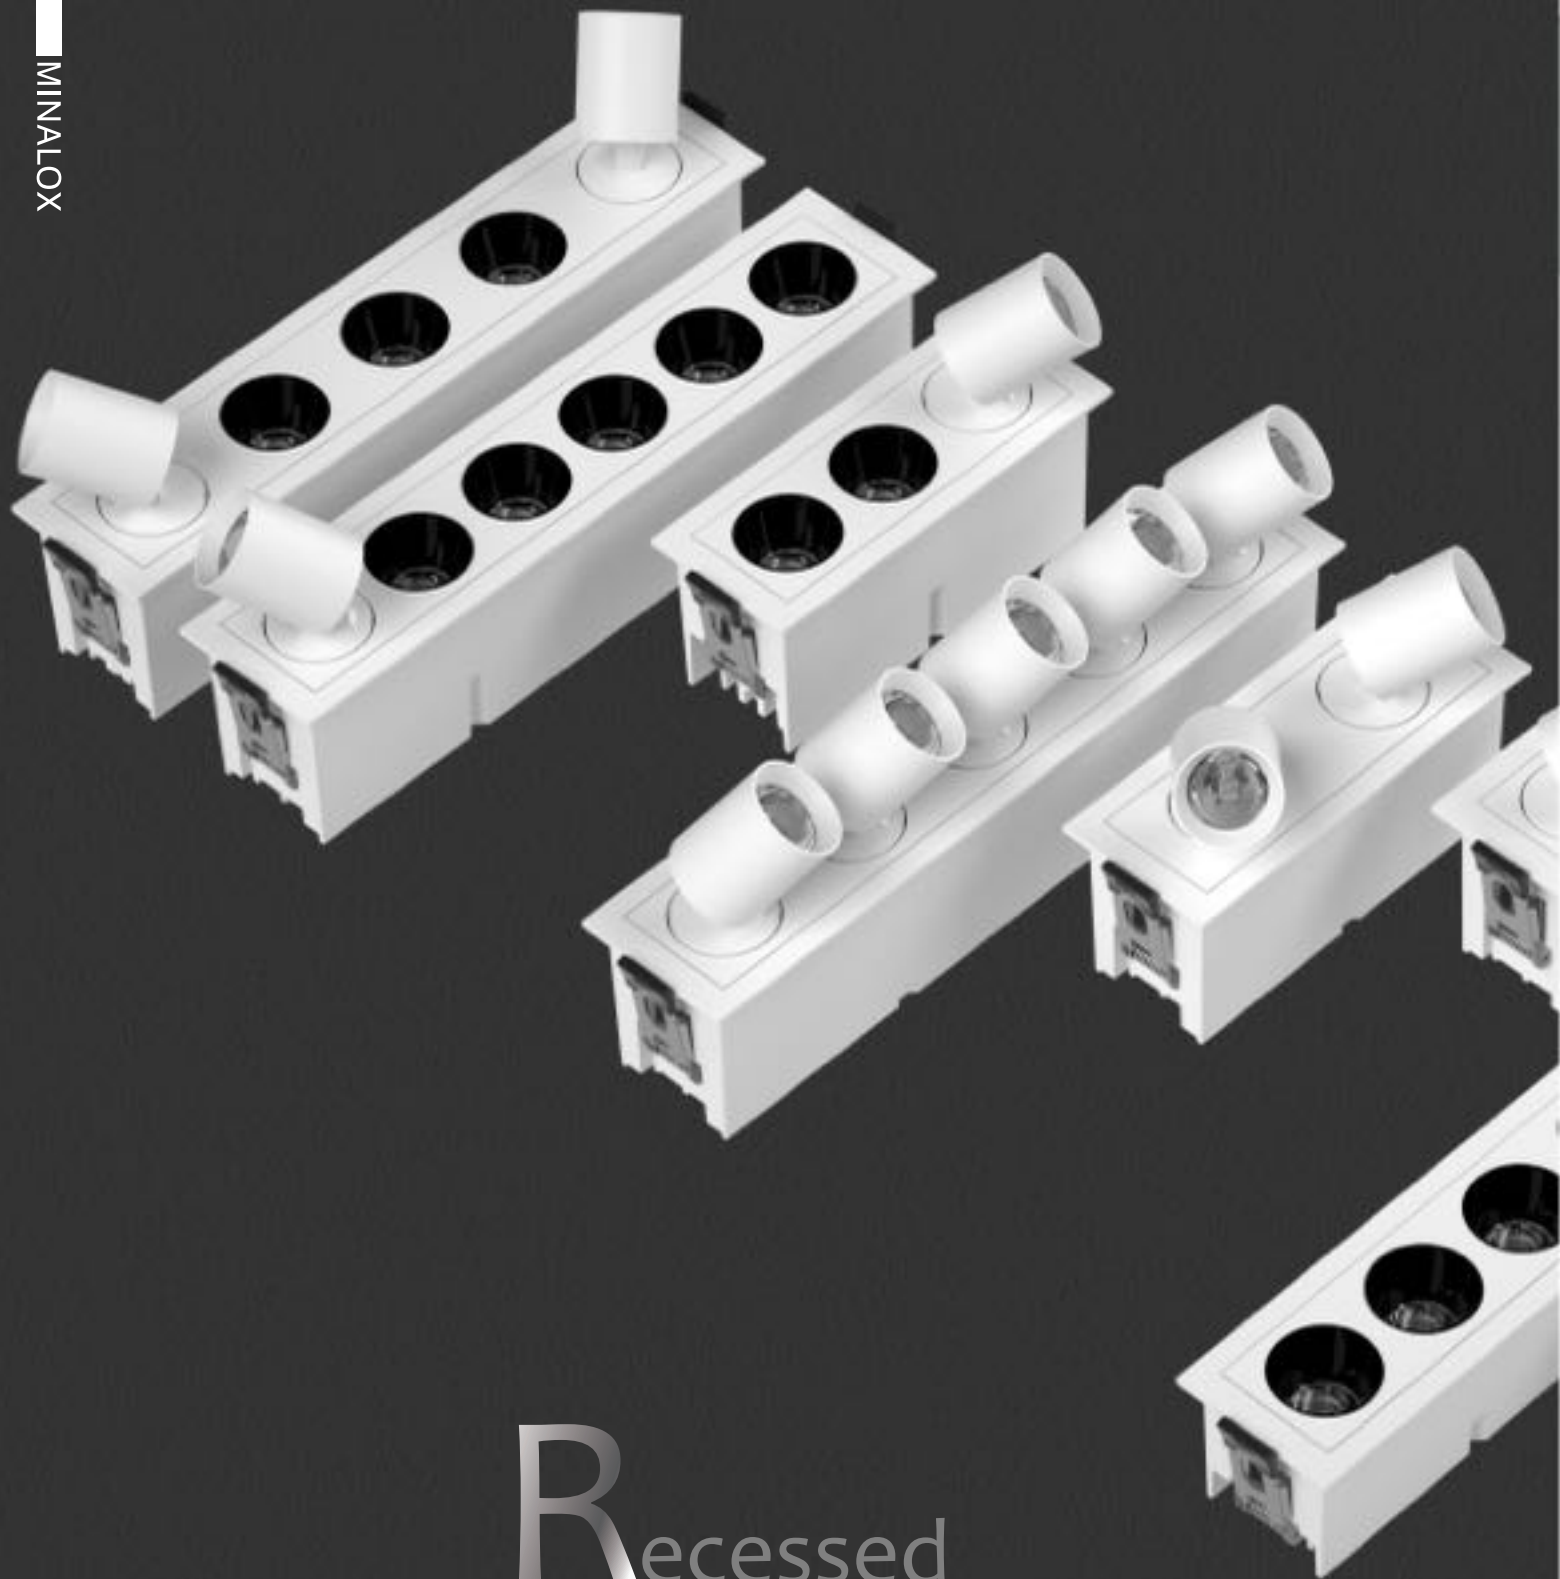
CODE:XT006

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	7W(SMD)	3000K	90	Lens	560-630lm
		4000K		24°	
		5000K		45°	
	12W(SMD)	3000K	90	Lens	960-1080lm
		4000K		24°	
		5000K		45°	
	18W(SMD)	3000K	90	Lens	1440-1620lm
		4000K		24°	
		5000K		45°	
	24W(SMD)	3000K	90	Lens	1920-2160lm
		4000K		24°	
		5000K		45°	

SURFACE
UP & DOWNLIGHT



SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
60mm  Ø232mm	XC009R	20+5W(SMD)	3000K	90	Lens 15°	2000-2250lm
			4000K		24°	
			5000K		38°	
					60°	
60mm  Ø310mm	XC009R	30+8W(SMD)	3000K	90	Lens 15°	3040-3420lm
			4000K		24°	
			5000K		38°	
					60°	
40mm  185×185mm	XC009S	20W(SMD)	3000K	90	Lens 15°	1600-1800lm
			4000K		24°	
			5000K		38°	
					60°	
40mm  288×185mm	XC009S	30W(SMD)	3000K	90	Lens 15°	2400-2700lm
			4000K		24°	
			5000K		38°	
					60°	



R ecessed LINEAR LIGHT



SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	XL011A	3W(SMD)	3000K 4000K 5000K	90	<u>Lens</u> 15° 24° 38°	240-270lm
	XL011A	9W(SMD)	3000K 4000K 5000K	90	<u>Lens</u> 15° 24° 38°	720-810lm
	XL011A	15W(SMD)	3000K 4000K 5000K	90	<u>Lens</u> 15° 24° 38°	1200-1350lm
	XL011B	3W(SMD)	3000K 4000K 5000K	90	<u>Lens</u> 15° 24° 38°	240-270lm
	XL011B	3W(SMD)	3000K 4000K 5000K	90	<u>Lens</u> 15° 24° 38°	240-270lm
	XL011B	6W(SMD)	3000K 4000K 5000K	90	<u>Lens</u> 15° 24° 38°	480-540lm
	XL011B	12W(SMD)	3000K 4000K 5000K	90	<u>Lens</u> 15° 24° 38°	960-1080lm
	XL011C	9W(SMD)	3000K 4000K 5000K	90	<u>Lens</u> 15° 24° 38°	720-810lm
	XL011C	12W(SMD)	3000K 4000K 5000K	90	<u>Lens</u> 15° 24° 38°	960-1080lm
	XL011C	15W(SMD)	3000K 4000K 5000K	90	<u>Lens</u> 15° 24° 38°	1200-1350lm





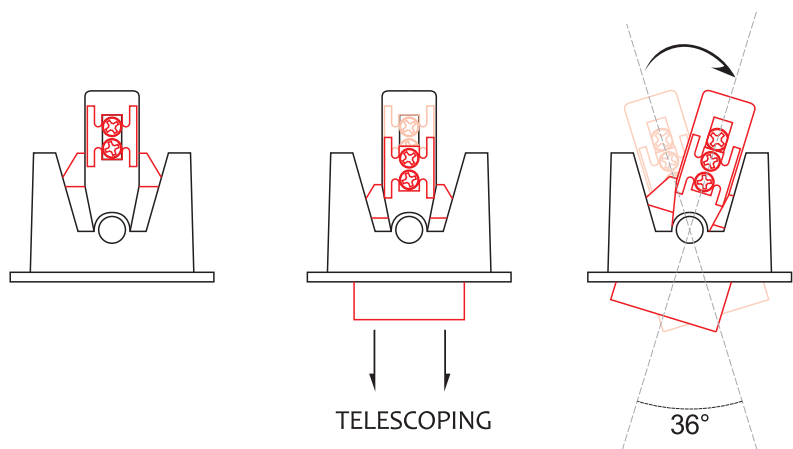
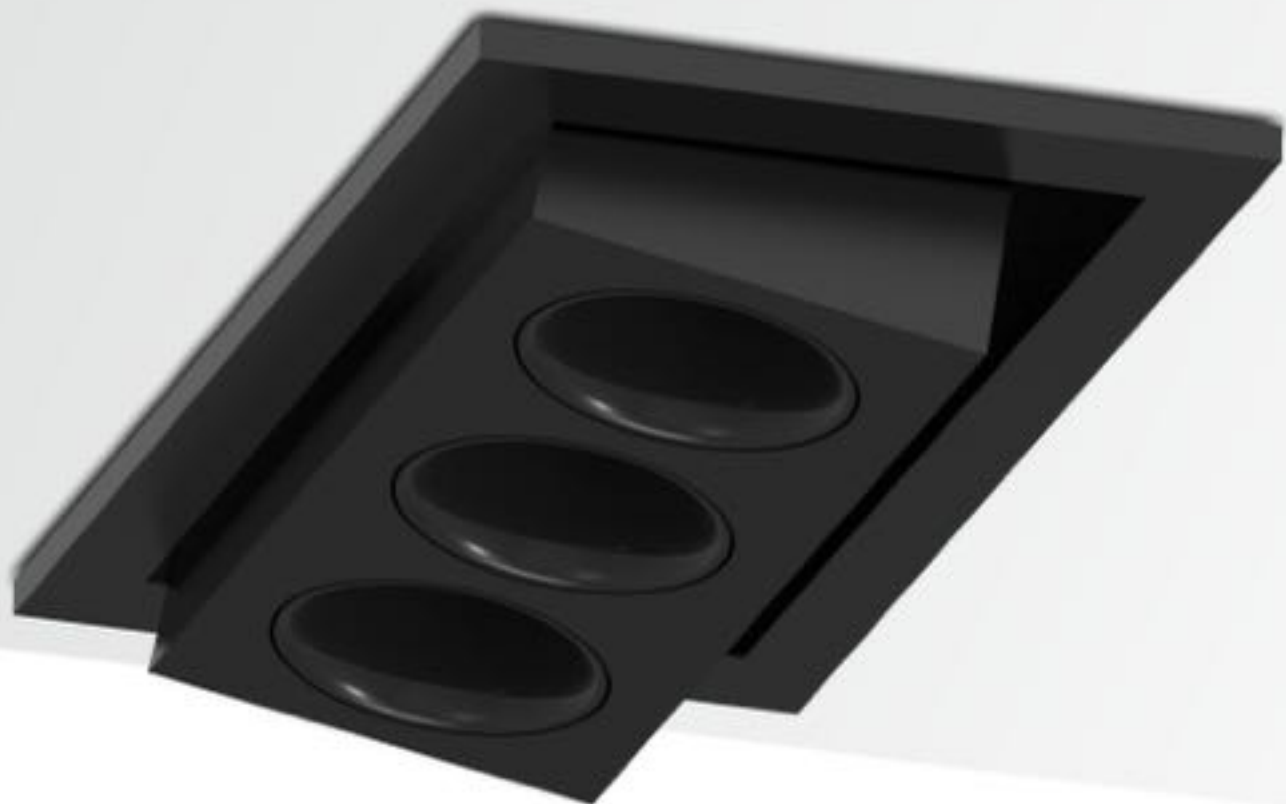
MINI LINEAR
DOWNLIGHT

RECESSED
MINI LINEAR
DOWNLIGHT



CODE XL017

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	7W(SMD)	3000K 4000K 5000K	90	36°	560-630lm
	10W(SMD)	3000K 4000K 5000K	90	36°	800-900lm
	20W(SMD)	3000K 4000K 5000K	90	36°	1600-1800lm



SPOT LIGHT

MINI

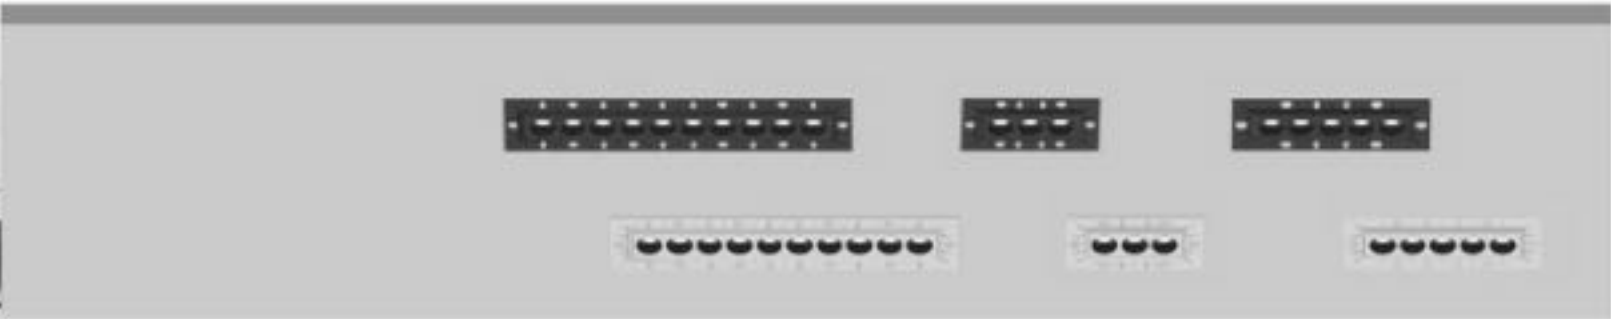
LINEAR

DOWNLIGHT






CODE XS017

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	7W(SMD)	3000K 4000K 5000K	90	36°	560-630lm
	10W(SMD)	3000K 4000K 5000K	90	36°	800-900lm
	20W(SMD)	3000K 4000K 5000K	90	36°	1600-1800lm



TRIMLESS
MINI LINEAR
DOWNLIGHT

CODE XT017



SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	7W(SMD)	3000K 4000K 5000K	90	36°	560-630lm
	10W(SMD)	3000K 4000K 5000K	90	36°	800-900lm
	20W(SMD)	3000K 4000K 5000K	90	36°	1600-1800lm

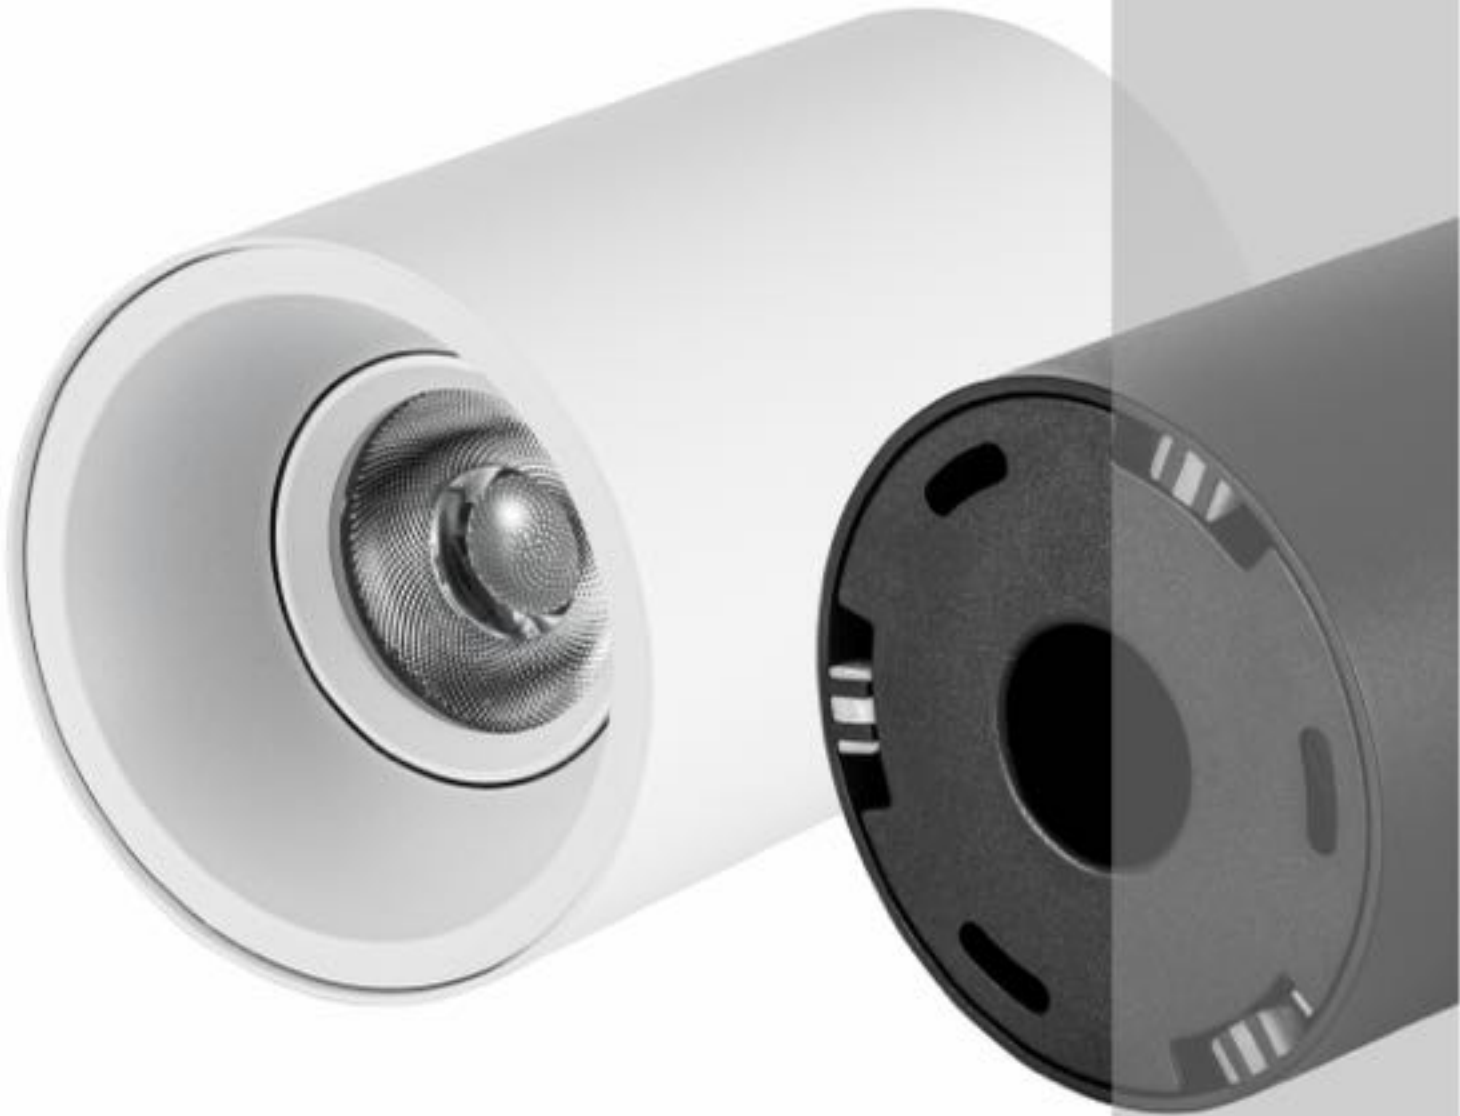


Recessed
360° ADJUSTABLE
DOWNLIGHT



SIZE	TYPE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	Adjustable	D2050R-A	7W(COB)	3000K 4000K 6000K	90	Lens	560-630lm
						15°	
						24°	
						38°	
						50°	
	Adjustable	D2050R-A	12W(COB)	3000K 4000K 6000K	90	Lens	960-1080lm
						15°	
						24°	
						38°	
						55°	
	Adjustable	D2050R-A	20W(COB)	3000K 4000K 6000K	90	Lens	1600-1800lm
						15°	
						24°	
						38°	
						55°	
	Fix	D2050R-F	7W(COB)	3000K 4000K 6000K	90	Lens	560-630lm
						15°	
						24°	
						38°	
						50°	
	Fix	D2050R-F	12W(COB)	3000K 4000K 6000K	90	Lens	960-1080lm
						15°	
						24°	
						38°	
						55°	
	Fix	D2050R-F	20W(COB)	3000K 4000K 6000K	90	Lens	1600-1800lm
						15°	
						24°	
						38°	
						55°	

SIZE	TYPE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	Fix	D2050S-F	7W(COB)	3000K 4000K 6000K	90	Lens	560-630lm
						15°	
						24°	
						38°	
						50°	
	Fix	D2050S-F	12W(COB)	3000K 4000K 6000K	90	Lens	960-1080lm
						15°	
						24°	
						38°	
						55°	
	Adjustable	D2050S-A	7W(COB)	3000K 4000K 6000K	90	Lens	560-630lm
						15°	
						24°	
						38°	
						50°	
	Adjustable	D2050S-A	12W(COB)	3000K 4000K 6000K	90	Lens	960-1080lm
						15°	
						24°	
						38°	
						55°	
	Adjustable	D2050S-A	2x12W(COB)	3000K 4000K 6000K	90	Lens	1920-2160lm
						15°	
						24°	
						38°	
						55°	
	Adjustable	D2050S-A	3x12W(COB)	3000K 4000K 6000K	90	Lens	2880-3240lm
						15°	
						24°	
						38°	
						55°	



SURFACE
360° ADJUSTABLE
DOWNLIGHT

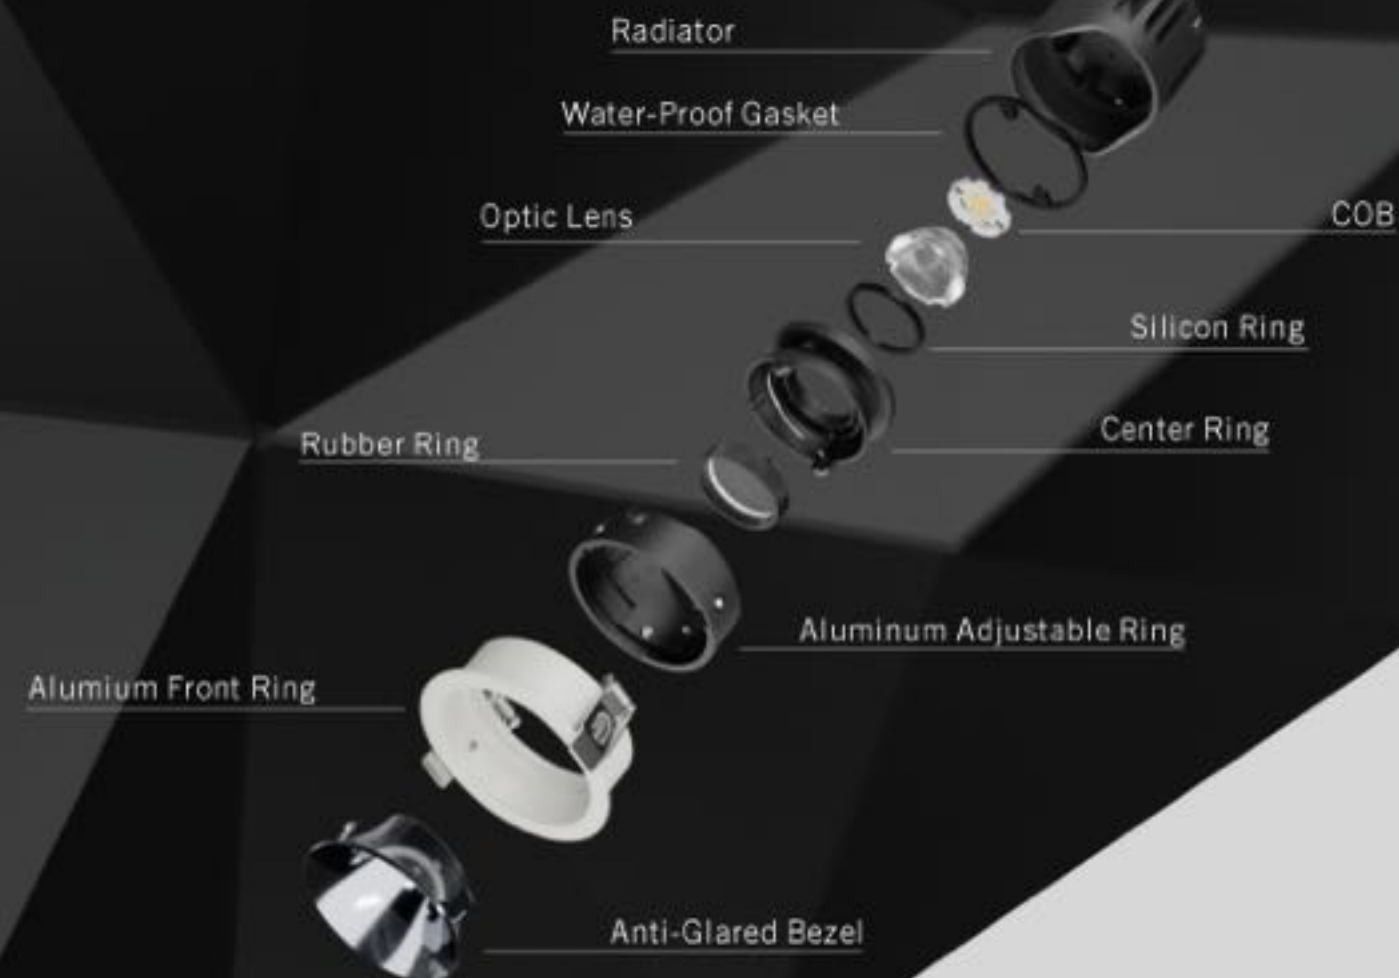


SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
Ø63mm 110mm	C2050A	7W(COB)	3000K 4000K 6000K	90	Lens 15° 24° 38° 55°	560-630lm
Ø83mm 130mm	C2050A	12W(COB)	3000K 4000K 6000K	90	Lens 15° 24° 38° 55°	960-1080lm



HIDDEN

IP65 WALL WASHER






IP65




CODE : D2055R

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
 Ø55mm 75mm Ø62mm	7W(COB)	3000K 4000K 6000K	90	<u>Lens</u> 15° 24° 36° 55°	560-630lm
 Ø75mm 90mm Ø83mm	12W(COB)	3000K 4000K 6000K	90	<u>Lens</u> 15° 24° 36° 55°	960-1080lm
 Ø95mm 115mm Ø105mm	20W(COB)	3000K 4000K 6000K	90	<u>Lens</u> 15° 24° 36° 55°	1600-1800lm





CODE : D2055S

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
 55×55mm 75mm 62×62mm	7W(COB)	3000K 4000K 6000K	90	<u>Lens</u> 15° 24° 36° 55°	560-630lm
 110×55mm 75mm 114×62mm	2x7W(COB)	3000K 4000K 6000K	90	<u>Lens</u> 15° 24° 36° 55°	1120-1260lm
 75×75mm 90mm 82×82mm	12W(COB)	3000K 4000K 6000K	90	<u>Lens</u> 15° 24° 36° 55°	960-1080lm
 148×75mm 90mm 158×75mm	2x12W(COB)	3000K 4000K 6000K	90	<u>Lens</u> 15° 24° 36° 55°	1920-2160lm
 95×95mm 115mm 103×103mm	20W(COB)	3000K 4000K 6000K	90	<u>Lens</u> 15° 24° 36° 55°	1600-1800lm
 190×95mm 115mm 198×107mm	2x20W(COB)	3000K 4000K 6000K	90	<u>Lens</u> 15° 24° 36° 55°	3200-3600lm

CODE : D2055RT

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	7W(COB)	3000K	90	<u>Lens</u> 15°	560-630lm
		4000K		24°	
		6000K		36° 55°	
	12W(COB)	3000K	90	<u>Lens</u> 15°	960-1080lm
		4000K		24°	
		6000K		36° 55°	
	20W(COB)	3000K	90	<u>Lens</u> 15°	1600-1800lm
		4000K		24°	
		6000K		36° 55°	






CODE : D2055ST

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	7W(COB)	3000K	90	<u>Lens</u> 15°	560-630lm
		4000K		24°	
		6000K		36° 55°	
	2x7W(COB)	3000K	90	<u>Lens</u> 15°	1120-1260lm
		4000K		24°	
		6000K		36° 55°	
	12W(COB)	3000K	90	<u>Lens</u> 15°	960-1080lm
		4000K		24°	
		6000K		36° 55°	
	2x12W(COB)	3000K	90	<u>Lens</u> 15°	1920-2160lm
		4000K		24°	
		6000K		36° 55°	
	20W(COB)	3000K	90	<u>Lens</u> 15°	1600-1800lm
		4000K		24°	
		6000K		36° 55°	
	2x20W(COB)	3000K	90	<u>Lens</u> 15°	3200-3600lm
		4000K		24°	
		6000K		36° 55°	



SideView LED
WALL WASHER






SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	D2055P	7W(COB)	3000K 4000K 6000K	90	WALL WASHER	560-630lm
	D2055P	12W(COB)	3000K 4000K 6000K	90	WALL WASHER	960-1080lm
	D2055P	20W(COB)	3000K 4000K 6000K	90	WALL WASHER	1600-1800lm
	D2055PT	7W(COB)	3000K 4000K 6000K	90	WALL WASHER	560-630lm
	D2055PT	12W(COB)	3000K 4000K 6000K	90	WALL WASHER	960-1080lm
	D2055PT	20W(COB)	3000K 4000K 6000K	90	WALL WASHER	1600-1800lm

350°
SPOT LIGHT



CODE : S1039

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	5W(COB)	3000K 4000K 6000K	90	15° 24° 38°	400-450lm
	7W(COB)	3000K 4000K 6000K	90	15° 24° 38°	560-630lm
	10W(COB)	3000K 4000K 6000K	90	15° 24° 38°	800-900lm



360°
SPOT LIGHT



CODE : S1030MINI

SIZE	TYPE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	TRIMLESS	5W(COB)	3000K	90	<u>Lens</u> 15°	400-450lm
		7W(COB)	4000K 6000K		24° 36°	560-630lm
	RECESSED	5W(COB)	3000K	90	<u>Lens</u> 15°	400-450lm
		7W(COB)	4000K 6000K		24° 36°	560-630lm
	RECESSED	2x5W(COB)	3000K	90	<u>Lens</u> 15°	800-900lm
		2x7W(COB)	4000K 6000K		24° 36°	1120-1260lm
	RECESSED	3x5W(COB)	3000K	90	<u>Lens</u> 15°	1200-1350lm
		3x7W(COB)	4000K 6000K		24° 36°	1680-1890lm
	RECESSED	4x5W(COB)	3000K	90	<u>Lens</u> 15°	1600-1800lm
		4x7W(COB)	4000K 6000K		24° 36°	2240-2520lm





Recessed




IP65 DOWNLIGHT



CODE : D2002 IP65

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	7W(COB)	3000K	90	<u>Reflector</u>	560-630lm
		4000K		60°	
		6000K			
	10W(COB)	3000K	90	<u>Reflector</u>	800-900lm
		4000K		60°	
		6000K			
	20W(COB)	3000K	90	<u>Reflector</u>	1600-1800lm
		4000K		60°	
		6000K			
	30W(COB)	3000K	90	<u>Reflector</u>	2400-2700lm
		4000K		60°	
		6000K			
	40W(COB)	3000K	90	<u>Reflector</u>	3200-3600lm
		4000K		60°	
		6000K			

CODE : D2003 IP65

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	10W(COB)	3000K	90	<u>Reflector</u>	800-900lm
		4000K		60°	
		6000K			
	20W(COB)	3000K	90	<u>Reflector</u>	1600-1800lm
		4000K		60°	
		6000K			
	30W(COB)	3000K	90	<u>Reflector</u>	2400-2700lm
		4000K		60°	
		6000K			
	40W(COB)	3000K	90	<u>Reflector</u>	3200-3600lm
		4000K		60°	
		6000K			

Recessed DOWNLIGHT



CODE : D2022


SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
 ø55mm 66mm ø60mm	5W(COB)	3000K 4000K 6000K	90	Reflector+Lens 15° 24° 38°	400-450lm
 ø75mm 81mm ø83mm	7W(COB)	3000K 4000K 6000K	90	Reflector+Lens 15° 24° 38°	560-630lm
 ø90mm 105mm ø100mm	12W(COB)	3000K 4000K 6000K	90	Reflector+Lens 15° 24° 38°	960-1080lm
 ø115mm 116mm ø130mm	20W(COB)	3000K 4000K 6000K	90	Reflector+Lens 15° 24° 38°	1600-1800lm
 ø145mm 125mm ø160mm	30W(COB)	3000K 4000K 6000K	90	Reflector+Lens 15° 24° 38°	2400-2700lm

R

ecessed DOWNLIGHT






CODE : D2026A

SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
 ø65mm 50mm ø76mm	7W(COB)	3000K 4000K 6000K	90	Reflector 15° 30° 45°	560-630lm
 ø85mm 68mm ø100mm	12W(COB)	3000K 4000K 6000K	90	Reflector 15° 30° 45°	960-1080lm
 ø105mm 83mm ø120mm	20W(COB)	3000K 4000K 6000K	90	Reflector 15° 30° 45°	1600-1800lm
 ø125mm 97mm ø140mm	30W(COB)	3000K 4000K 6000K	90	Reflector 15° 30° 45°	2400-2700lm



Recessed DOWNLIGHT

CODE : D2041


SIZE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	5W(COB)	3000K 4000K 6000K	90	Lens 24° 38°	400-450lm
		3000K 4000K 6000K		Lens 24° 38°	
		3000K 4000K 6000K		Lens 24° 38°	








Recessed DOWNLIGHT



CODE : D2052





SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	D2052S	3W(SMD)	3000K 4000K 5000K	90	Lens 15° 24° 36°	210-240lm
	D2052L	3W(SMD)	3000K 4000K 5000K	90	Lens 15° 24° 36°	210-240lm
	D2052	6W(COB)	3000K 4000K 6000K	90	Lens 15° 24° 36°	480-540lm
	D2052	9W(COB)	3000K 4000K 6000K	90	Lens 15° 24° 36°	720-810lm
	D2052	12W(COB)	3000K 4000K 6000K	90	Lens 15° 24° 36°	960-1080lm

CODE : D2052T



SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	D2052TS	3W(SMD)	3000K 4000K 5000K	90	Lens 15° 24° 36°	210-240lm
	D2052TL	3W(SMD)	3000K 4000K 5000K	90	Lens 15° 24° 36°	210-240lm
	D2052T	6W(COB)	3000K 4000K 6000K	90	Lens 15° 24° 36°	480-540lm
	D2052T	9W(COB)	3000K 4000K 6000K	90	Lens 15° 24° 36°	720-810lm
	D2052T	12W(COB)	3000K 4000K 6000K	90	Lens 15° 24° 36°	960-1080lm

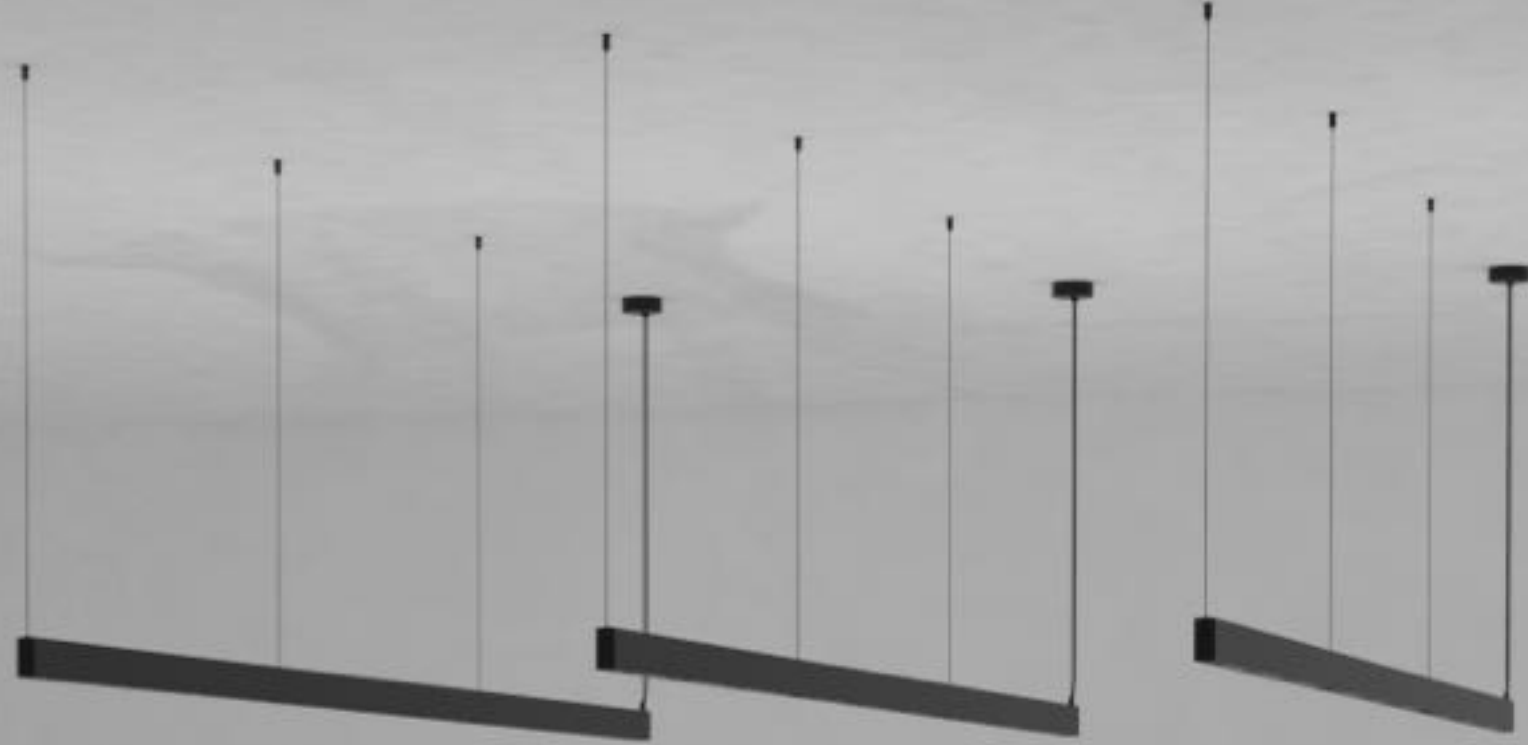
Recessed
MODULE
SPOTLIGHT



SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	S1037S	5W(COB)	3000K	90	Reflector 15°	400-450lm
			4000K		24°	
	S1037L	5W(COB)	3000K	90	Reflector 15°	400-450lm
			4000K		24°	
	S1037S	7W(COB)	3000K	90	Reflector 15°	560-630lm
			4000K		24°	
	S1037L	7W(COB)	3000K	90	Reflector 15°	560-630lm
			4000K		24°	
			6000K		38°	

SPOT LIGHT

SIZE	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	S1041S	5W(COB)	3000K 4000K 6000K	90	15° 24° 38°	400-450lm
	S1041M	5W(COB)	3000K 4000K 6000K	90	15° 24° 38°	400-450lm
	S1041L	5W(COB)	3000K 4000K 6000K	90	15° 24° 38°	400-450lm
	S1041XL	5W(COB)	3000K 4000K 6000K	90	15° 24° 38°	400-450lm



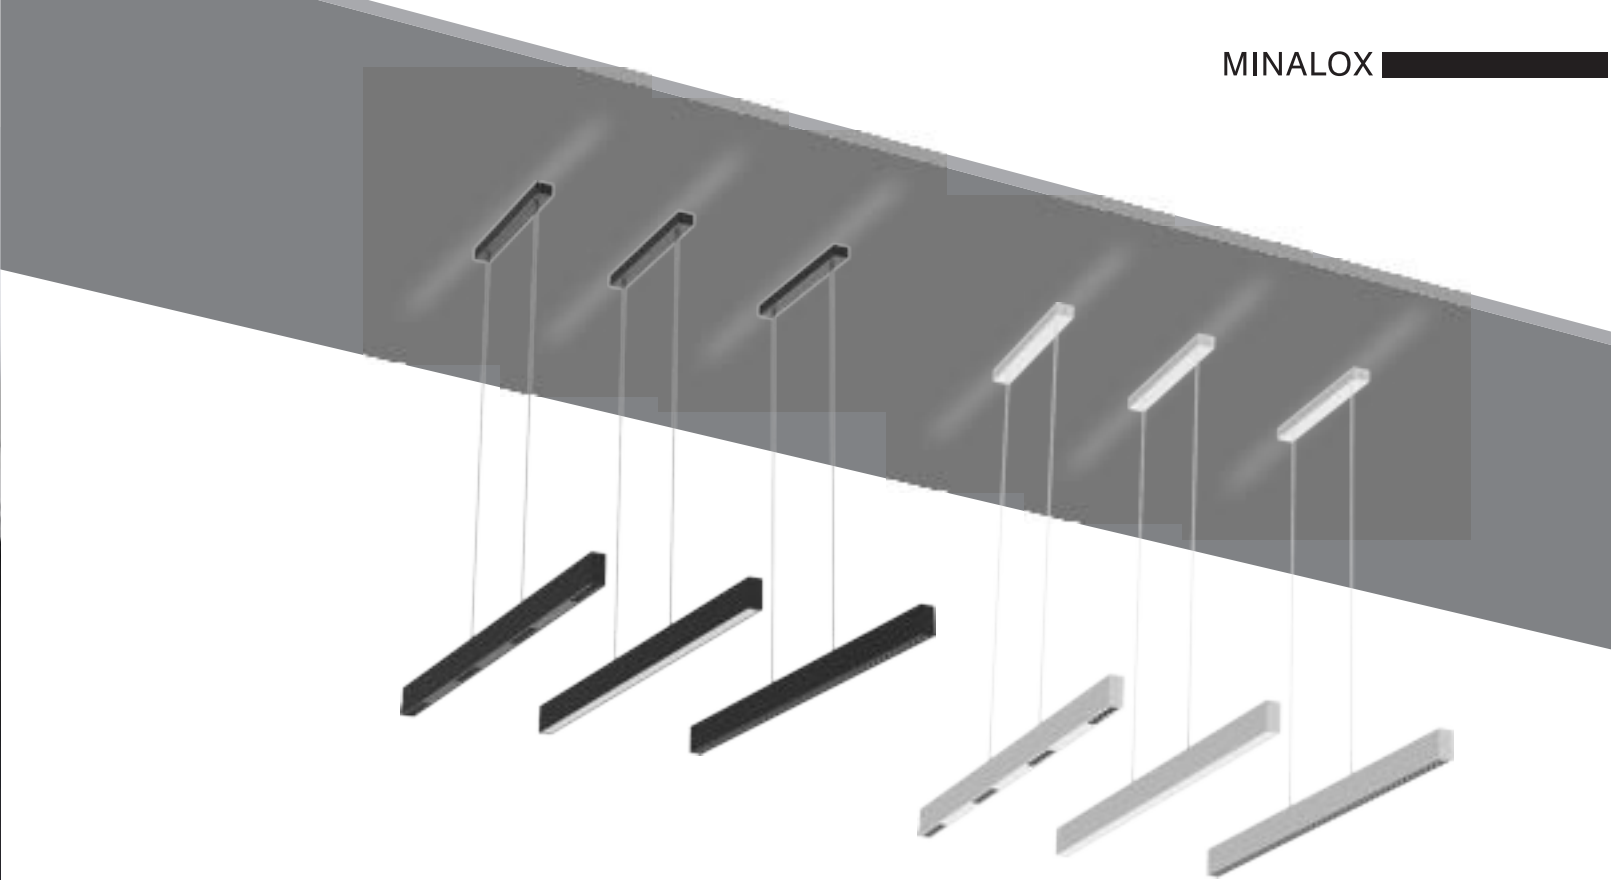
System

UP & DOWN
LINEAR LIGHT ,



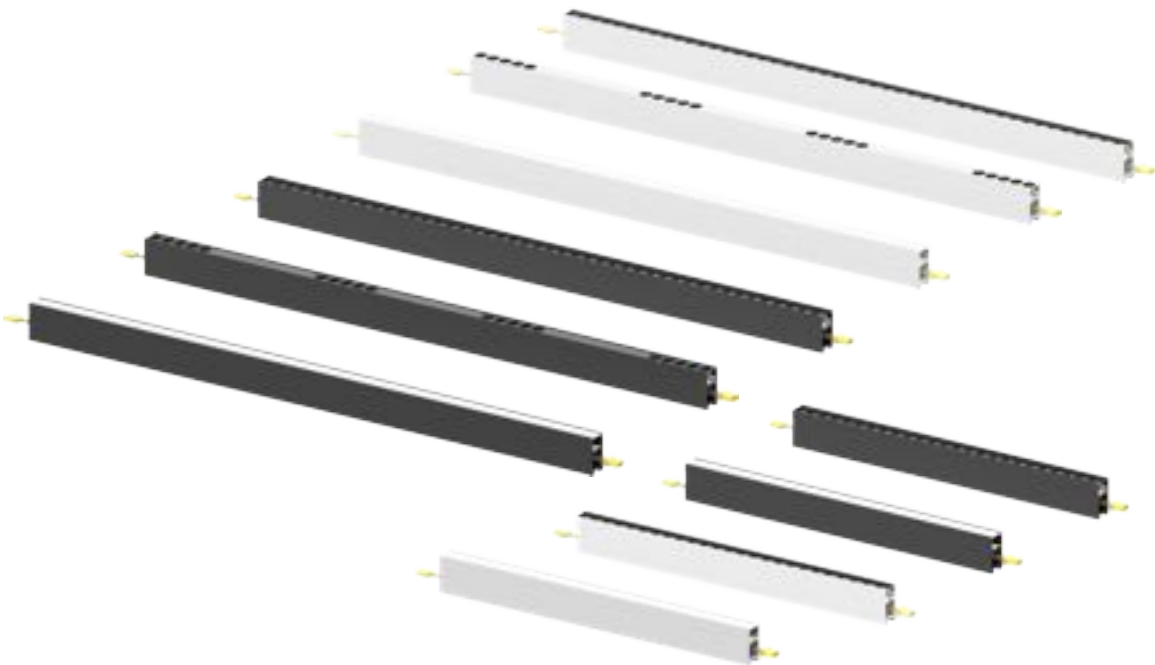





PENDANT LIGHT
U P D O W N L I G H T



SIZE(Unit : mm)	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	XP010A	38+15W(SMD)	3000K	90	<u>Reflector</u> 15°	4240-4770lm
	XP010A	38W(SMD)	4000K		36°	3040-3420lm
			5000K		55°	
	XP010B	38+15W(SMD)	3000K	90	<u>Lens</u> 36°	4240-4770lm
	XP010B	38W(SMD)	4000K			3040-3420lm
			5000K			
	XP010C	38+15W(SMD)	3000K	90	<u>Diffuser</u> 110°	4240-4770lm
	XP010C	38W(SMD)	4000K			3040-3420lm
			5000K			





SYSTEM
PENDANT LIGHT
UP DOWN LIGHT



SIZE(Unit : mm)	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	XL010A	20+8W(SMD) 20W(SMD)	3000K	90	Reflector 15°	2240-2520lm
			4000K		36°	1600-1800lm
			5000K		55°	
	XL010C	20+8W(SMD) 20W(SMD)	3000K	90	Diffuser 110°	2240-2520lm
			4000K			1600-1800lm
			5000K			
	XC010A	38+15W(SMD) 38W(SMD)	3000K	90	Reflector 15°	4240-4770lm
			4000K		36°	3040-3420lm
			5000K		55°	
	XL010B	38+15W(SMD) 38W(SMD)	3000K	90	Lens 36°	4240-4770lm
			4000K			3040-3420lm
			5000K			
	XL010C	38+15W(SMD) 38W(SMD)	3000K	90	Diffuser 110°	4240-4770lm
			4000K			3040-3420lm
			5000K			



CEILING LIGHT

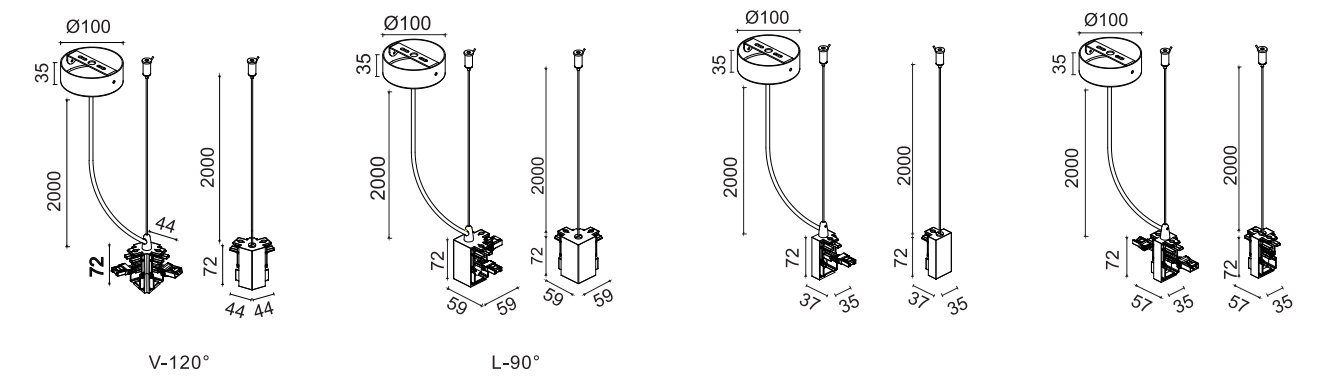
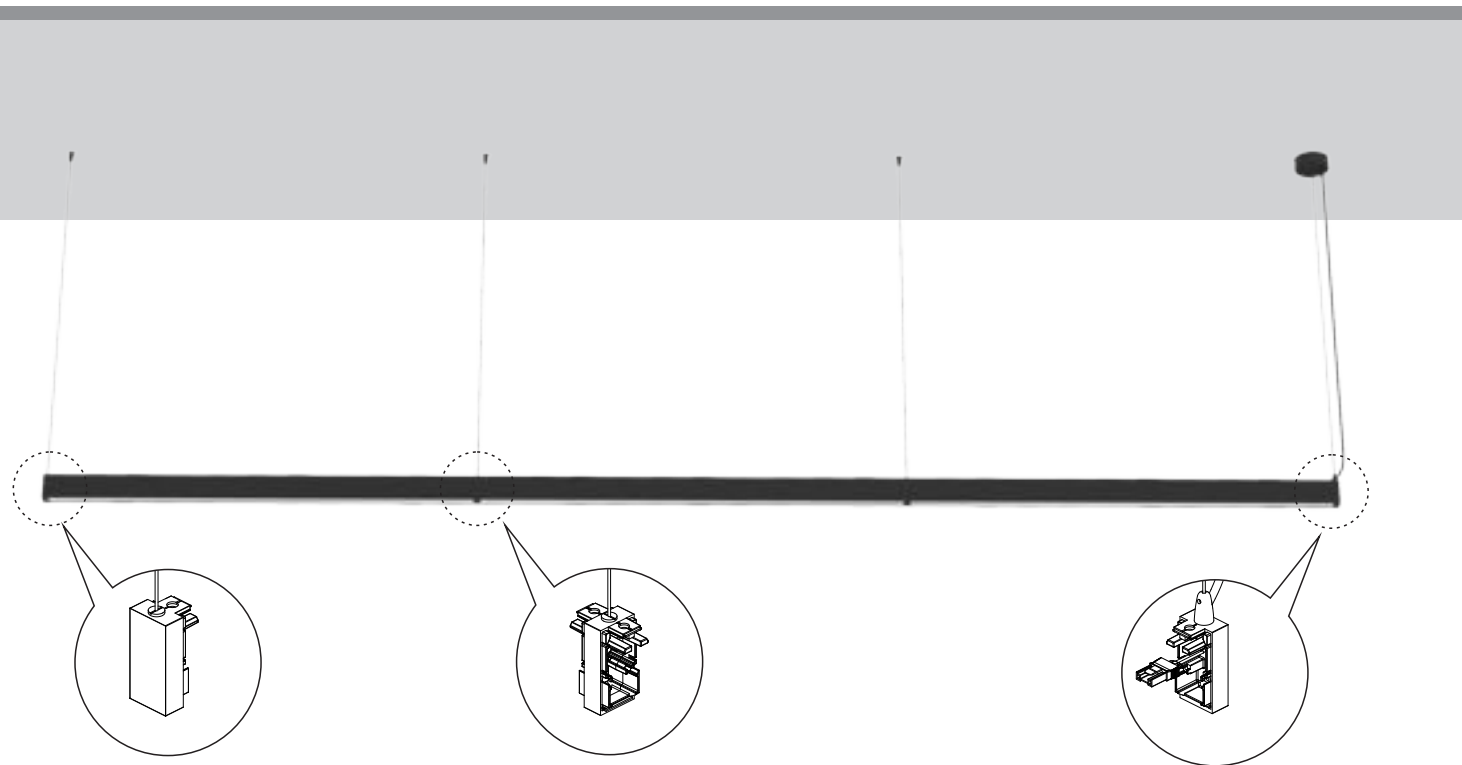
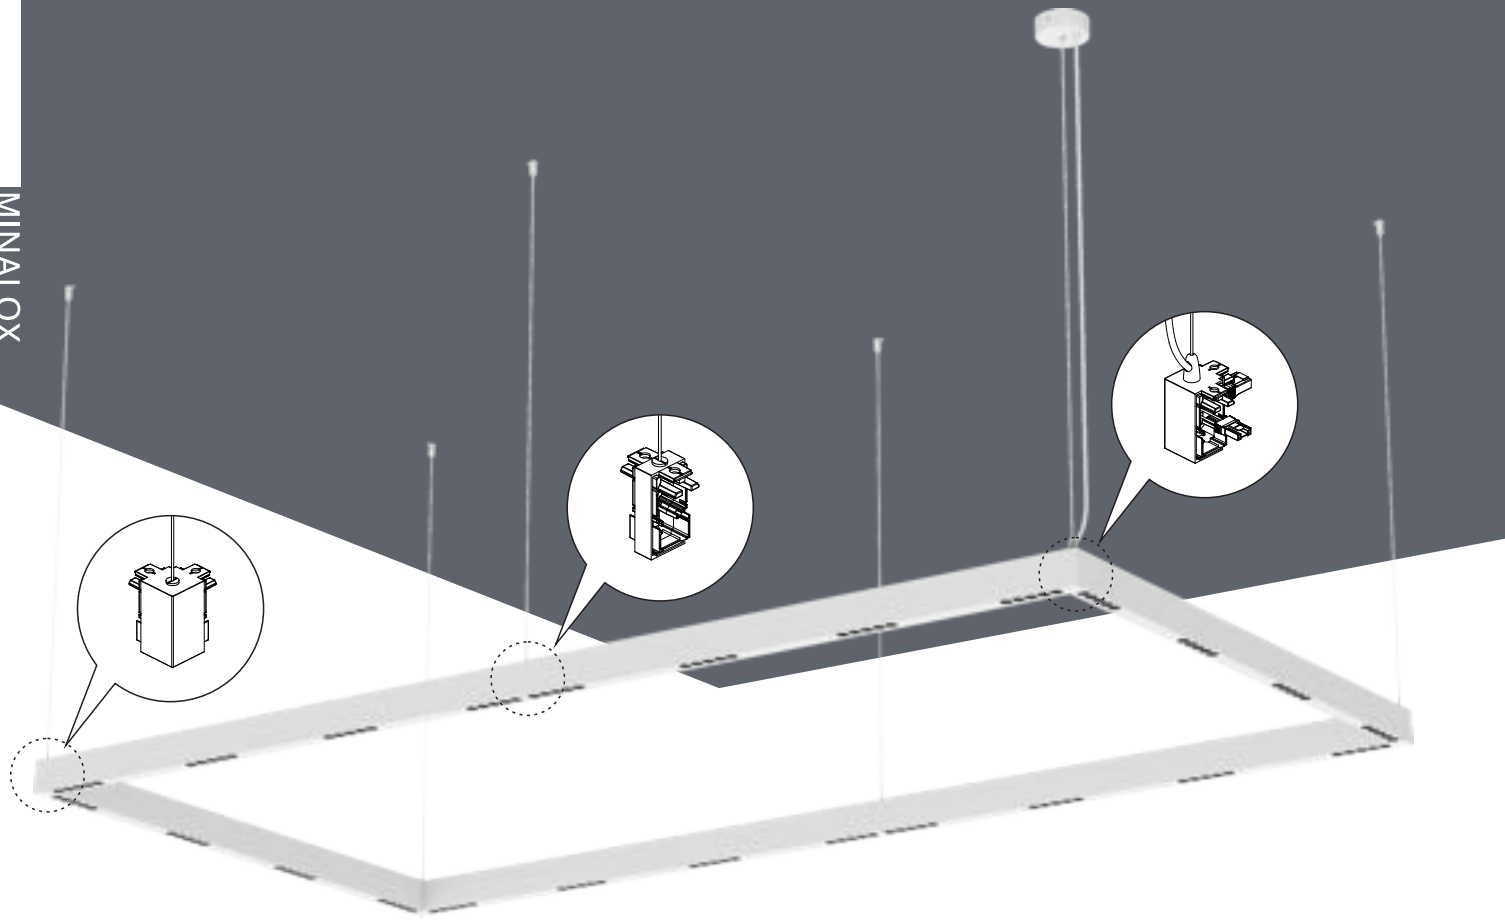


SIZE(Unit : mm)	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	XC010A	20W(SMD)	3000K	90	Reflector	1600-1800lm
			4000K		15°	
			5000K		36°	
					55°	
	XC010C	20(SMD)	3000K	90	Diffuser	1600-1800lm
			4000K		110°	
			5000K			
	XC010A	38W(SMD)	3000K	90	Reflector	3040-3420lm
			4000K		15°	
			5000K		36°	
					55°	
	XC010B	38(SMD)	3000K	90	Lens	3040-3420lm
			4000K		36°	
			5000K			
	XC010C	38(SMD)	3000K	90	Diffuser	3040-3420lm
			4000K		110°	
			5000K			

RECESSED
CEILING LIGHT



SIZE(Unit : mm)	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	XD010A	38W(SMD)	3000K	90	Reflector	3040-3420lm
			4000K		15°	
			5000K		36°	
					55°	
	XD010C	38(SMD)	3000K	90	Diffuser	3040-3420lm
			4000K		110°	
			5000K			





LOOP
Pendant
UP DOWNLIGHT



LOOP
Pendant
UP DOWNLIGHT



CODE : XP012A

SIZE(Unit : mm)	CODE :	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	XP012A	12+5W(SMD)	Reflector			
			3000K	90	38°	1360-1530lm
			4000K			
			5000K			
	XP012A	3x12+5W(SMD)	Reflector			
			3000K	90	38°	4080-4590lm
			4000K			
			5000K			
	XP012B	12+5W(SMD)	diffuser			
			3000K	90	110°	1360-1530lm
			4000K			
			5000K			



LOOP
Pendant
UP DOWNLIGHT





SIZE(Unit : mm)	CODE :	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	XP012AS	12+5W(SMD)	3000K	90	<u>Reflector</u>	1360-1530lm
			4000K		38°	
	XP012BS	12+5W(SMD)	3000K	90	<u>diffuser</u>	1360-1530lm
			4000K		110°	
	XP012S	24+8W(SMD)	3000K	90	<u>Reflector</u>	2560-2880lm
			4000K		38°	
	XP012S	40+15W(SMD)	3000K	90	<u>Reflector</u>	4400-4950lm
			4000K		38°	
	XP012S	40+15W(SMD)	3000K	90	<u>Reflector</u>	4400-4950lm
			4000K		38°	
	XP012S	40+15W(SMD)	3000K	90	<u>Reflector</u>	4400-4950lm
			4000K		38°	



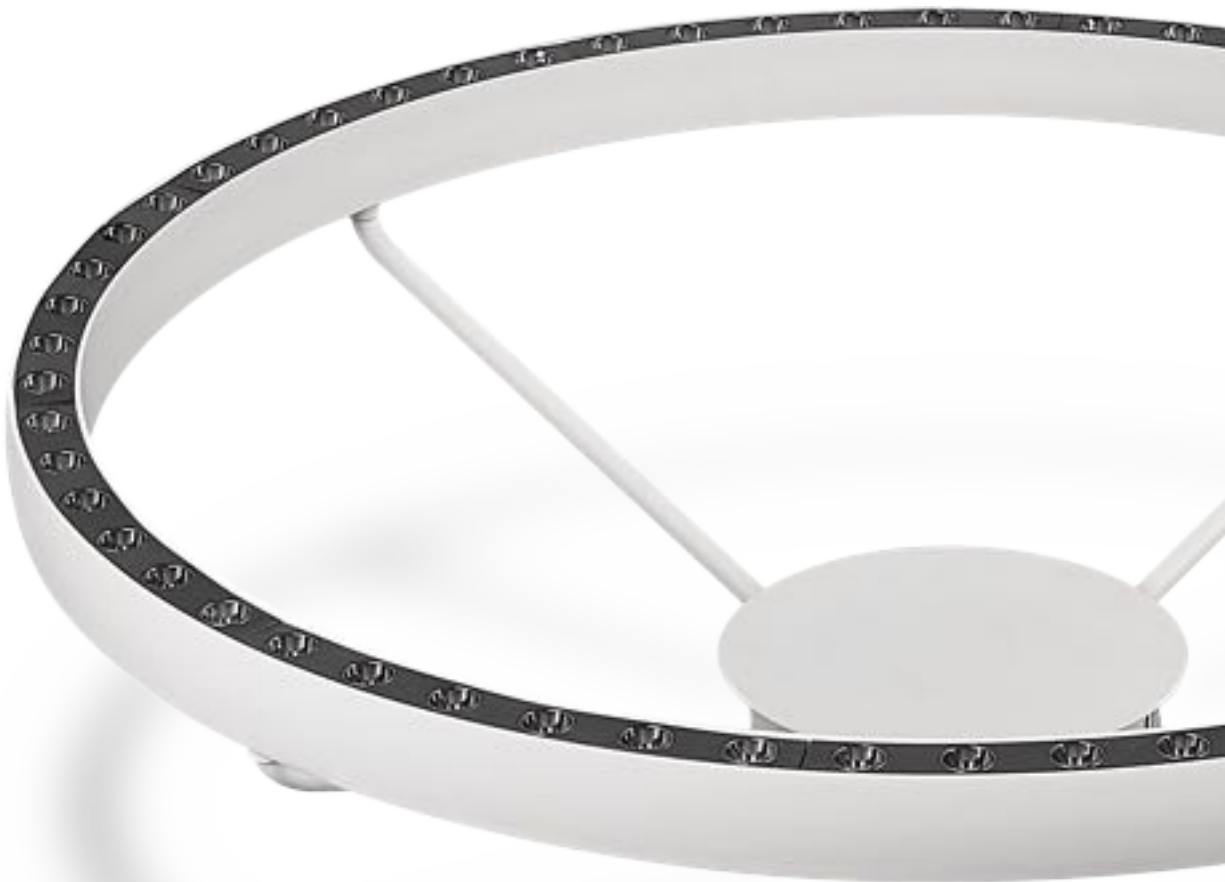
LOOP
Pendant
UP DOWNLIGHT






CODE : XP012

SIZE(Unit : mm)	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	24+8W(SMD)	3000K	90	38°	2560-2880lm
		4000K			
		5000K			
	40+15W(SMD)	3000K	90	38°	4400-4950lm
		4000K			
		5000K			
	60x20W(SMD)	3000K	90	38°	6400-7200lm
		4000K			
		5000K			
	80+30W(SMD)	3000K	90	38°	8800-9900lm
		4000K			
		5000K			

LOOP
Ceiling
UP DOWNLIGHT



CODE : XC012

SIZE(Unit : mm)	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	12+5W(SMD)	Reflector			1360-1530lm
		3000K	90	38°	
		4000K			
		5000K			
	24+8W(SMD)	Reflector			2560-2880lm
		3000K	90	38°	
		4000K			
		5000K			
	40+15W(SMD)	Reflector			4400-4950lm
		3000K	90	38°	
		4000K			
		5000K			



LUCENTE Pendant

UP DOWNLIGHT

LUCENTE
Pendant
UP DOWNLIGHT



CODE : Xp013

SIZE(Unit : mm)	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	24+8W(SMD)	3000K	90	45°	2560-2880lm
		4000K			
		5000K			
	40+15W(SMD)	3000K	90	45°	4400-4950lm
		4000K			
		5000K			
	60x20W(SMD)	3000K	90	45°	6400-7200lm
		4000K			
		5000K			
	80+30W(SMD)	3000K	90	45°	8800-9900lm
		4000K			
		5000K			

LUCENTE
Pendant
UP DOWNLIGHT



SIZE(Unit : mm)	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	XP013W	24+8W(SMD)	3000K	90	45°	2560-2880lm
			4000K			
			5000K			
	XP013S	40+15W(SMD)	3000K	90	45°	4400-4950lm
			4000K			
			5000K			

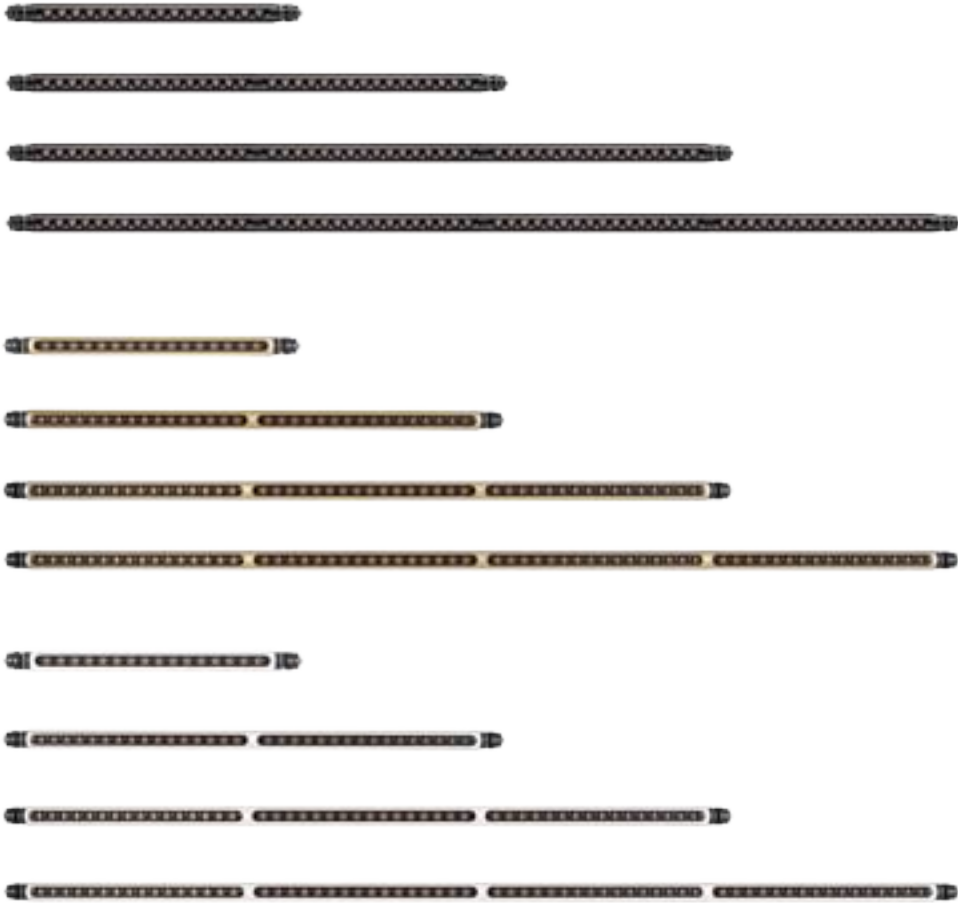
MAGIC ROD
SYSTEM
MODULE LIGHT











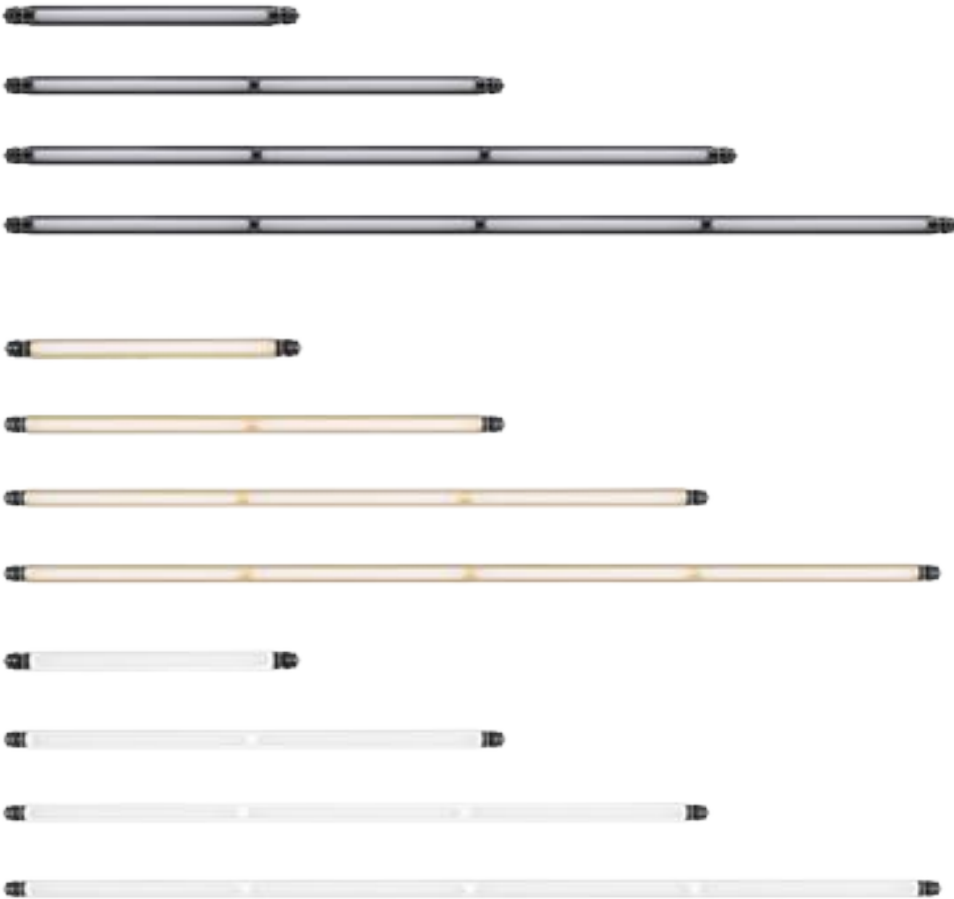
SYSTEM
MODULE LIGHT
GRILLE







CODE : XL015A

SIZE(Unit : mm)	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	8W(SMD)	3000K	90	<u>Lens</u>	640-720lm
		4000K		24°	
		5000K			
	16W(SMD)	3000K	90	<u>Lens</u>	1280-1440lm
		4000K		24°	
		5000K			
	24W(SMD)	3000K	90	<u>Lens</u>	1920-2160lm
		4000K		24°	
		5000K			
	30W(SMD)	3000K	90	<u>Lens</u>	2400-2700lm
		4000K		24°	
		5000K			

SYSTEM
MODULE LIGHT
DIFFUSER



CODE : XL015B

SIZE(Unit : mm)	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	8W(SMD)	3000K	90	<u>diffuser</u>	640-720lm
		4000K		110°	
		5000K			
	16W(SMD)	3000K	90	<u>diffuser</u>	1280-1440lm
		4000K		110°	
		5000K			
	24W(SMD)	3000K	90	<u>diffuser</u>	1920-2160lm
		4000K		110°	
		5000K			
	32W(SMD)	3000K	90	<u>diffuser</u>	2560-2880lm
		4000K		110°	
		5000K			







SYSTEM

MODULE LIGHT
FULL DIFFUSER



CODE : XL015C

SIZE(Unit : mm)	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	8W(SMD)	3000K	90	<u>diffuser</u>	640-720lm
		4000K		110°	
		5000K			
	16W(SMD)	3000K	90	<u>diffuser</u>	1280-1440lm
		4000K		110°	
		5000K			
	24W(SMD)	3000K	90	<u>diffuser</u>	1920-2160lm
		4000K		110°	
		5000K			
	32W(SMD)	3000K	90	<u>diffuser</u>	2560-2880lm
		4000K		110°	
		5000K			

SYSTEM
MODULE LIGHT
360° DIFFUSER

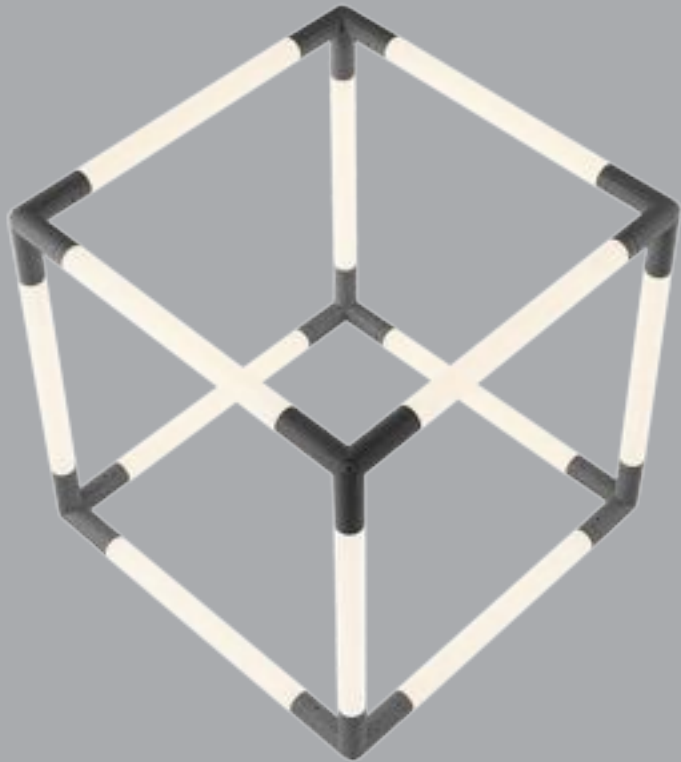



CODE : XL015D

SIZE(Unit : mm)	POWER	CCT	CRI	BEAM ANGLE	LUMEN
395	8W(COB STRIP)	3000K	90	<u>diffuser</u>	640-720lm
		4000K		360°	
		5000K			
717	16W(COB STRIP)	3000K	90	<u>diffuser</u>	1280-1440lm
		4000K		360°	
		5000K			

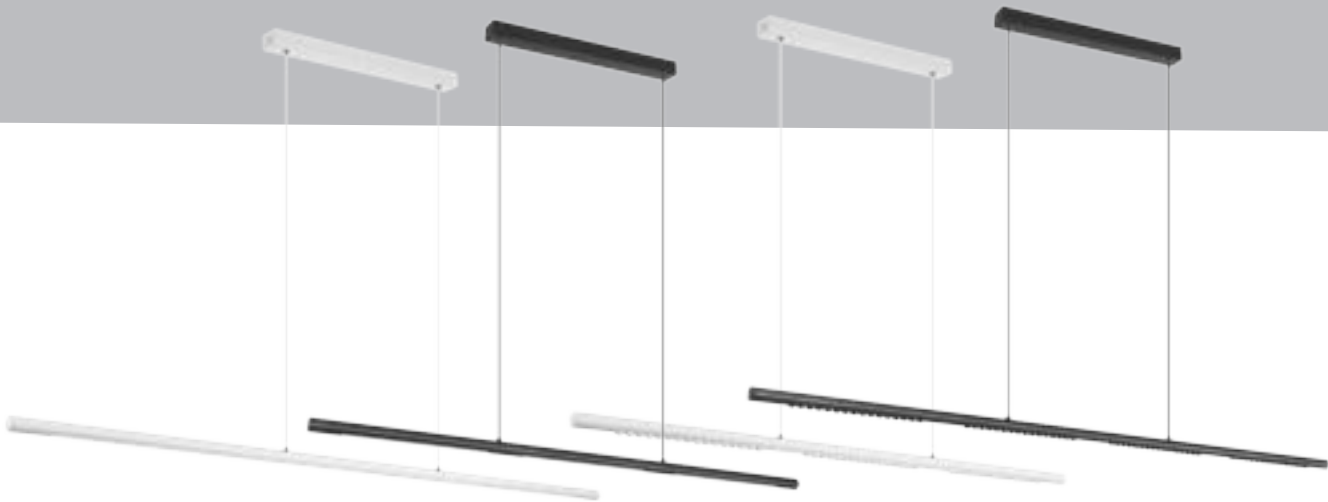
SYSTEM

MODULE LIGHT



SIZE(Unit : mm)	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	XP015D-322	96W(SMD)	3000K	90	diffuser 360°	7680-8640lm
			4000K			
			5000K			

SYSTEM
MODULE LIGHT



SIZE(Unit : mm)	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	XP015A-1200	28W(SMD)	3000K 4000K 5000K	90	<u>Lens</u> 24°	2240-2520lm
	XP015A-1600	38W(SMD)	3000K 4000K 5000K	90	<u>Lens</u> 24°	3040-3420lm
	XP015B-1200	28W(SMD)	3000K 4000K 5000K	90	<u>diffuser</u> 110°	2240-2520lm
	XP015B-1600	38W(SMD)	3000K 4000K 5000K	90	<u>diffuser</u> 110°	3040-3420lm





SYSTEM
MODULE LIGHT



SIZE(Unit : mm)	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	XP015A-S322	32W(SMD)	3000K 4000K 5000K	90	<u>Lens</u> 24°	2560-2880lm
	XP015A-S644	64W(SMD)	3000K 4000K 5000K	90	<u>Lens</u> 24°	5120-5760lm
	XP015B-S322	32W(SMD)	3000K 4000K 5000K	90	<u>diffuser</u> 110°	2560-2880lm
	XP015B-S644	64W(SMD)	3000K 4000K 5000K	90	<u>diffuser</u> 110°	5120-5760lm

SYSTEM
MODULE LIGHT





SIZE(Unit : mm)	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	XP015A-S966	64W(SMD)	3000K 4000K 5000K	90	<u>Lens</u> 24°	5120-5760lm
	XP015A-S1288	80W(SMD)	3000K 4000K 5000K	90	<u>Lens</u> 24°	6400-7200lm
	XP015B-S966	64W(SMD)	3000K 4000K 5000K	90	<u>diffuser</u> 110°	5120-5760lm
	XP015B-S1288	80W(SMD)	3000K 4000K 5000K	90	<u>diffuser</u> 110°	6400-7200lm



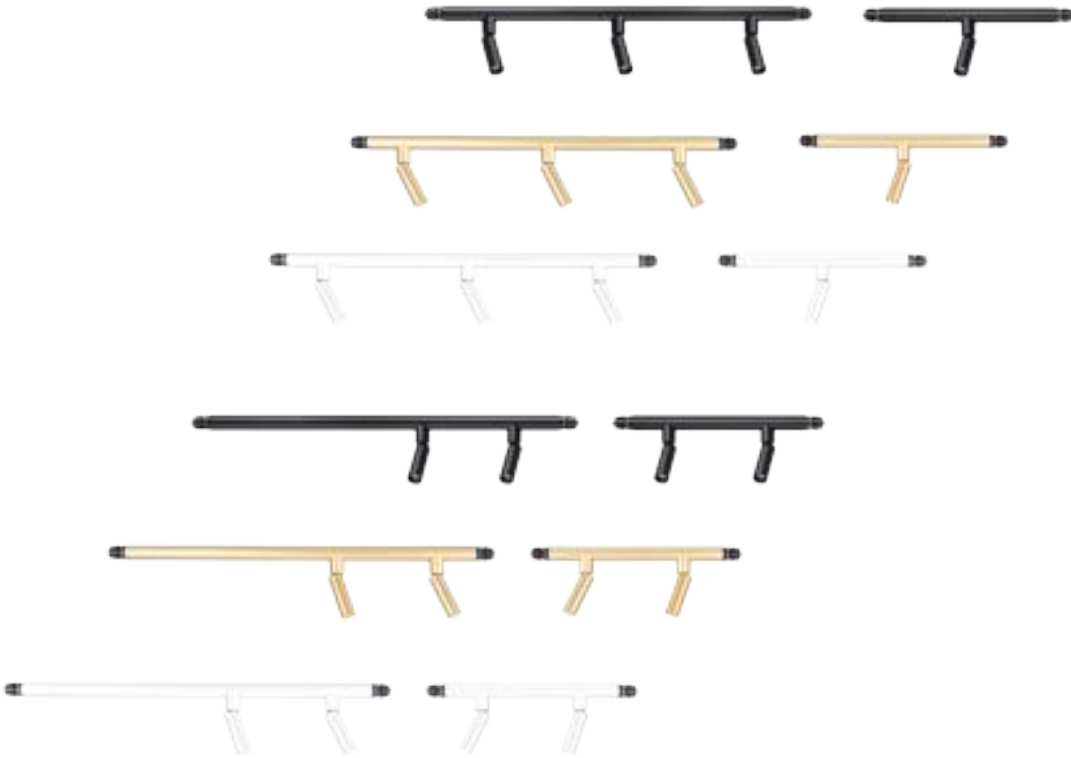
SYSTEM
MODULE LIGHT







SIZE(Unit : mm)	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	XF015B-S	64W(SMD)	3000K 4000K 5000K	90	<u>diffuser</u> 110°	5120-5760lm
	XF015B-L	96W(SMD)	3000K 4000K 5000K	90	<u>diffuser</u> 110°	7680-8640lm



SYSTEM
MODULE LIGHT
SPOT LIGHT



SIZE(Unit : mm)	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	XS015-322	6W(COB)	3000K	90	Lens	400-450lm
			4000K		24°	
			5000K		50°	
	XS015-322	2x6W(COB)	3000K	90	Lens	800-900lm
			4000K		24°	
			5000K		50°	
	XS015-644	2x6W(COB)	3000K	90	Lens	800-900lm
			4000K		24°	
			5000K		50°	
	XS015-644	3x6W(COB)	3000K	90	Lens	1200-1350lm
			4000K		24°	
			5000K		50°	



SYSTEM
MODULE LIGHT
SPOT LIGHT



SIZE(Unit : mm)	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	XS015B-322	6W(COB)	3000K	90	Lens	560-630lm
			4000K		24°	
			5000K		50°	
	XS015B-322	2x6W(COB)	3000K	90	Lens	1120-1260lm
			4000K		24°	
			5000K		50°	
	XS015B-644	2x6W(COB)	3000K	90	Lens	1120-1260lm
			4000K		24°	
			5000K		50°	
	XS015B-644	3x6W(COB)	3000K	90	Lens	1680-1890lm
			4000K		24°	
			5000K		50°	

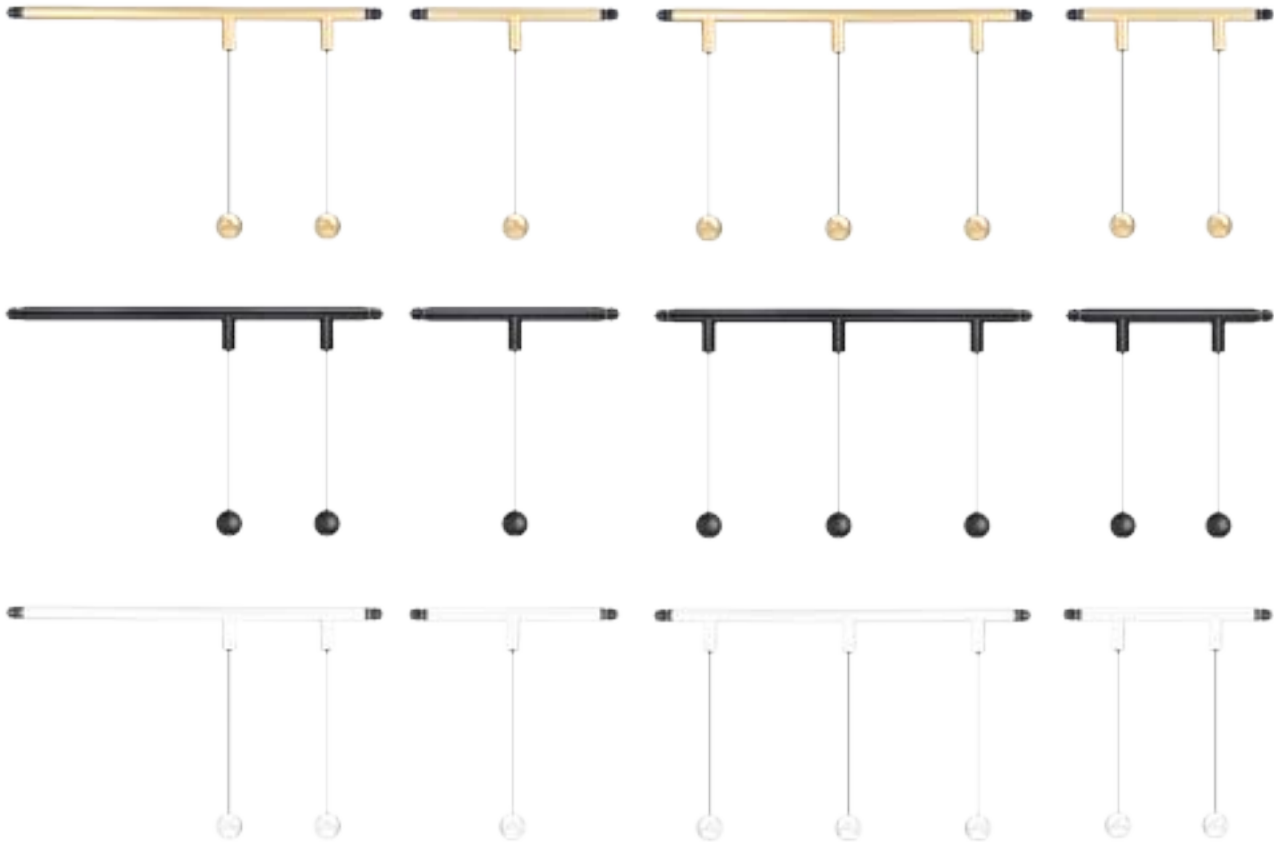






MINALOX

SYSTEM


MODULE LIGHT
PENDENT LIGHT

MINALOX



SIZE(Unit : mm)	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	XP015-322	6W(COB)	3000K 4000K 5000K	90	<u>Lens</u> 24° 50°	560-630lm
	XP015-322	2x6W(COB)	3000K 4000K 5000K	90	<u>Lens</u> 24° 50°	1120-1260lm
	XP015-644	2x6W(COB)	3000K 4000K 5000K	90	<u>Lens</u> 24° 50°	1120-1260lm
	XP015-644	3x6W(COB)	3000K 4000K 5000K	90	<u>Lens</u> 24° 50°	1680-1890lm



SYSTEM
MODULE LIGHT
PENDENT LIGHT



SIZE(Unit : mm)	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	XTP7112	5W(COB)	3000K	90	Reflector 15°	400-450lm
			4000K		24°	
			5000K		38°	







SYSTEM
MODULE LIGHT
CEILING LIGHT



SIZE(Unit : mm)	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
diffuser						
	XTC3012	20W(SMD)	3000K 4000K 5000K	90	110°	1600-1800lm
diffuser						
	XTC3012	30W(SMD)	3000K 4000K 5000K	90	110°	2400-2700lm

SYSTEM
MODULE



SIZE(Unit : mm)	CODE	CCT	CRI	BEAM ANGLE	LUMEN
	XL015O-322	-	-	-	-
	XL015O-644	-	-	-	-
	XL015O-966	-	-	-	-
	XL015OT-322	-	-	-	-
	XL015OT-644-1	-	-	-	-
	XL015OT-644-2	-	-	-	-



XL015-TAIN
(TRIPLE FIX INPUT 2.0m)



XL015-LSIN
(END CAP INPUT 2.0m)



XL015-ESIN
(END CAP INPUT 2.0m)



XL015-LRIN
(END CAP INPUT 2.0m)



XL015-ERIN
(END CAP INPUT 2.0m)



XL015-TL
(L FIX CONNECT)



XL015-TB/C/D
(TRIPLE FIX CONNECT)



XL015-L
(DOUBLE CONNECT)



XL015-Y
(TRIPLE CONNECT)



XL015-X
(CROSS CONNECT)



XL015-TF
(FOUR FIX CONNECT)



XL015-E
(END CAP)



XL015-I
(STRAIGHT IN)









XL015-FS
(SHORT FIXED BUCKLE)

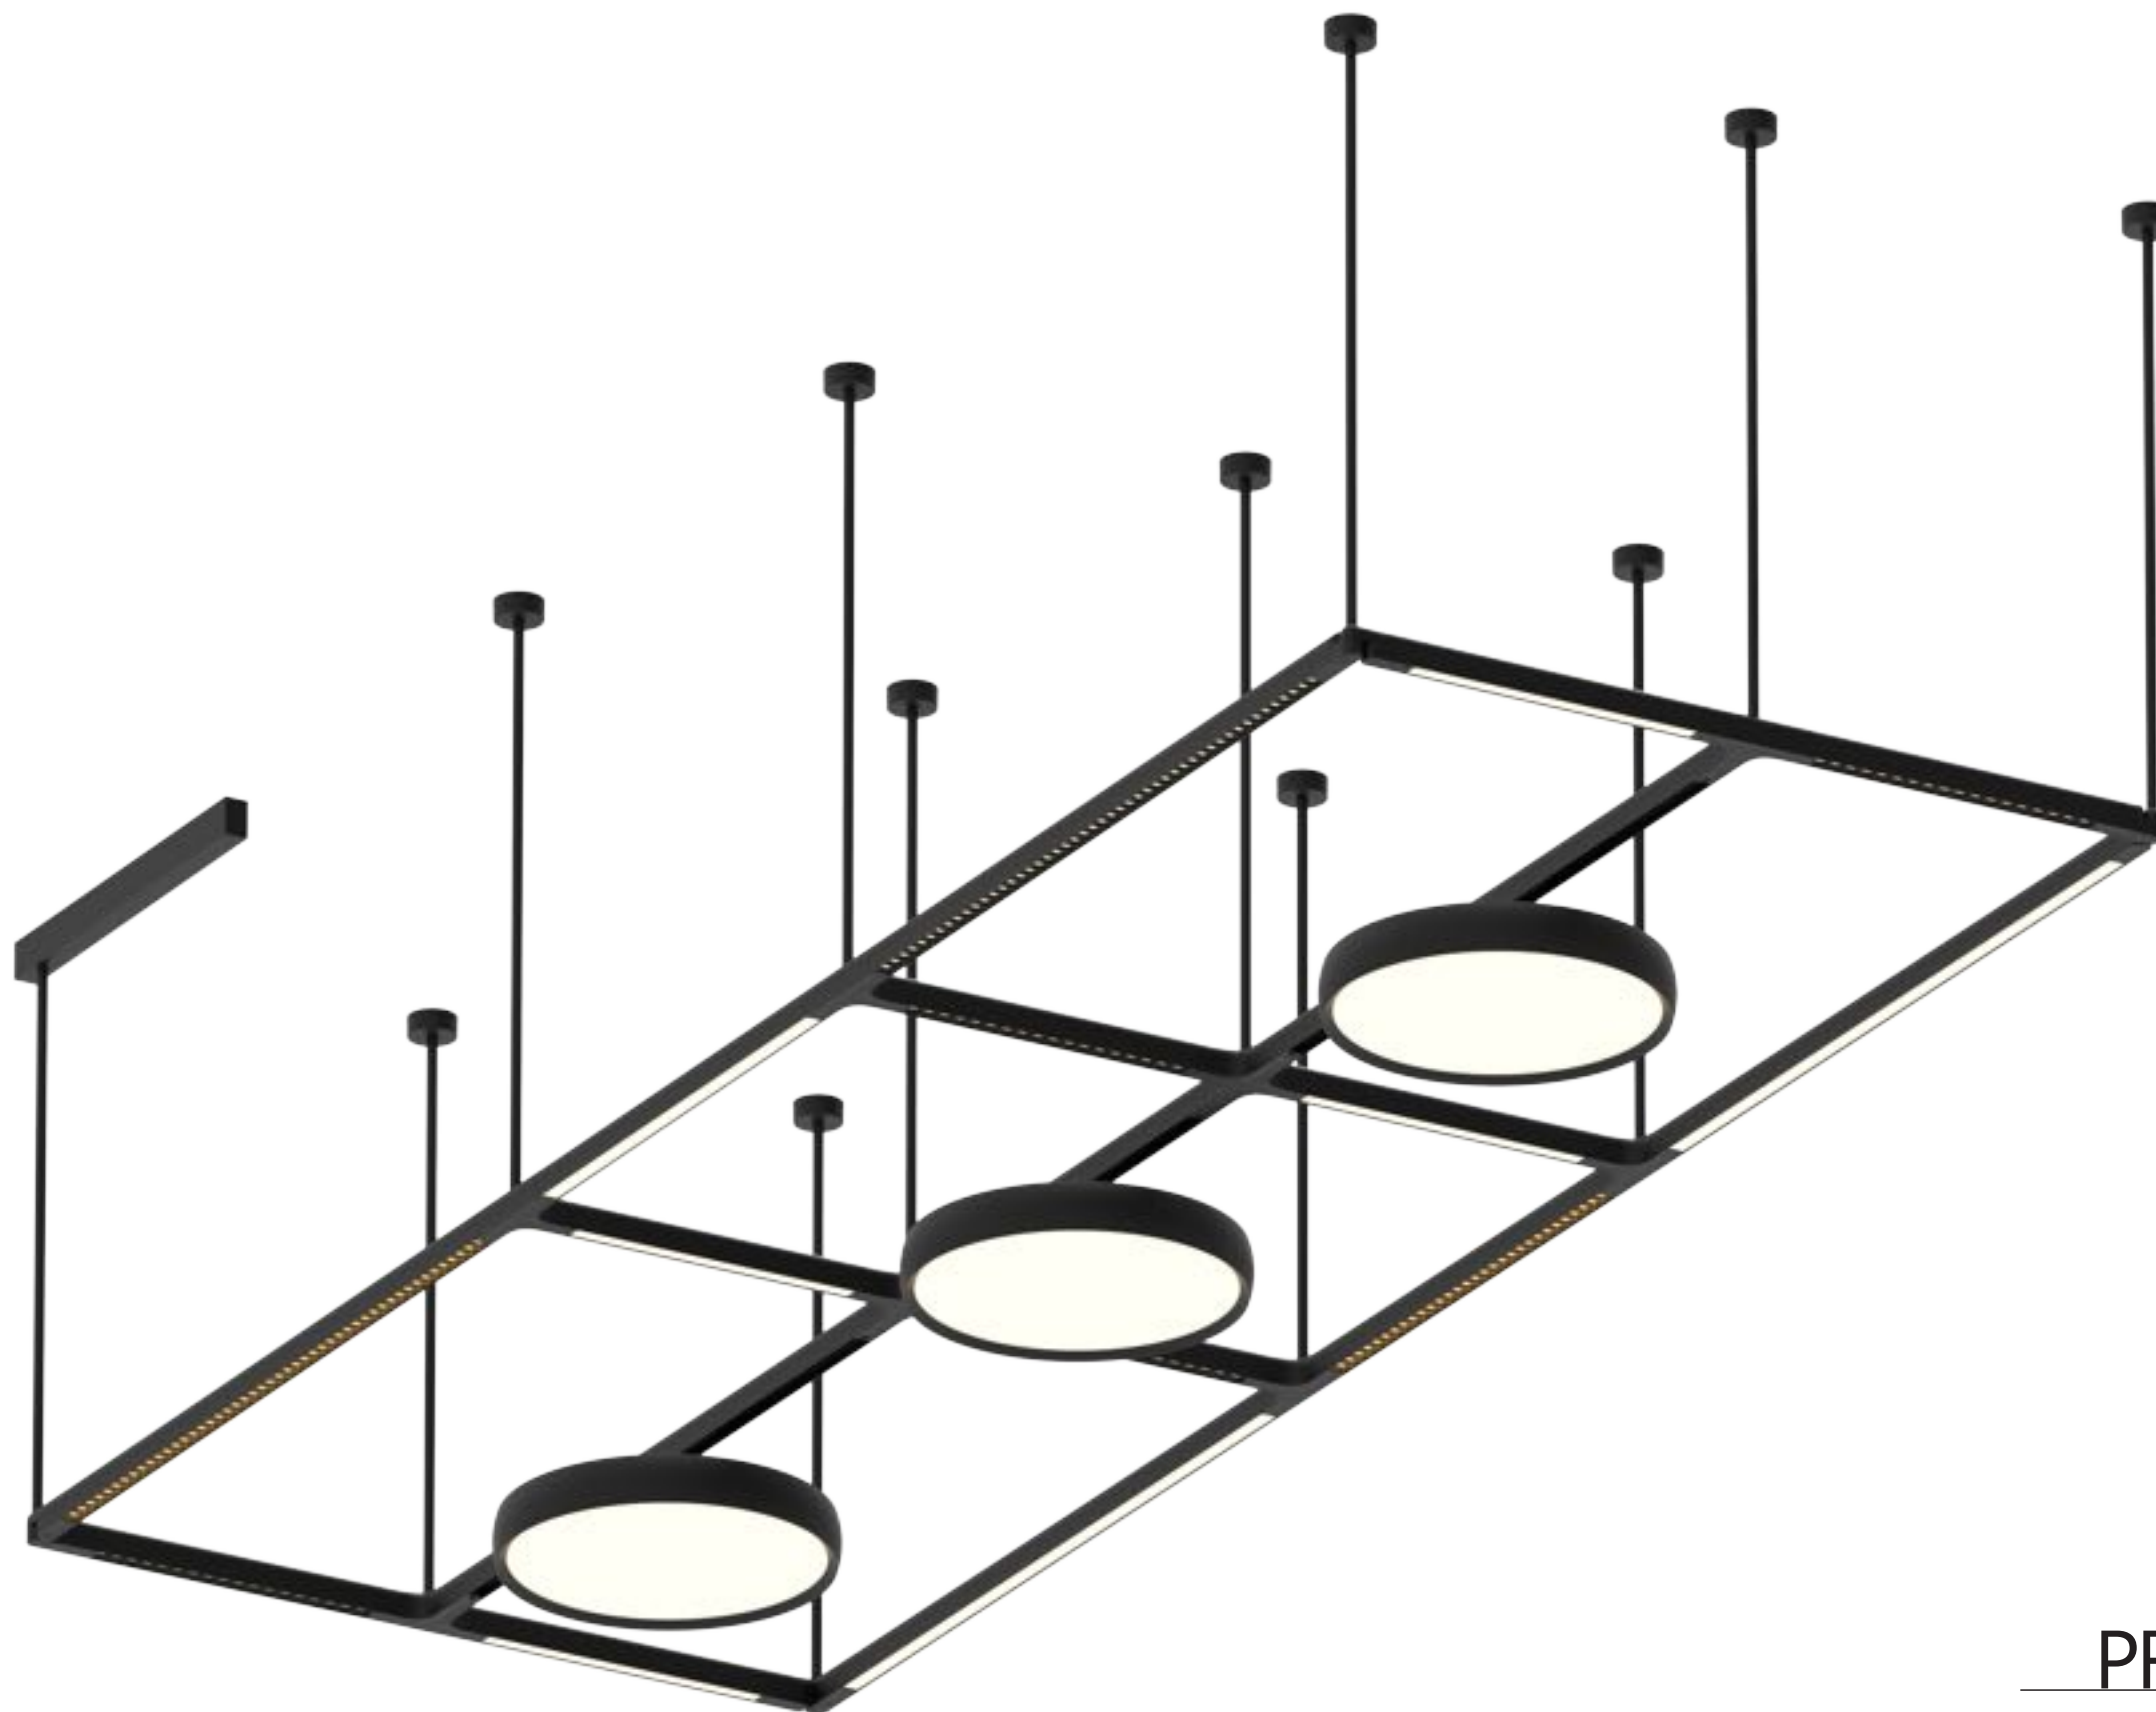


XL015-FL
(HIGH FIXED BUCKLE)




XL015-SK
(SUSPENSION SET 2.0m)





PROLiNK







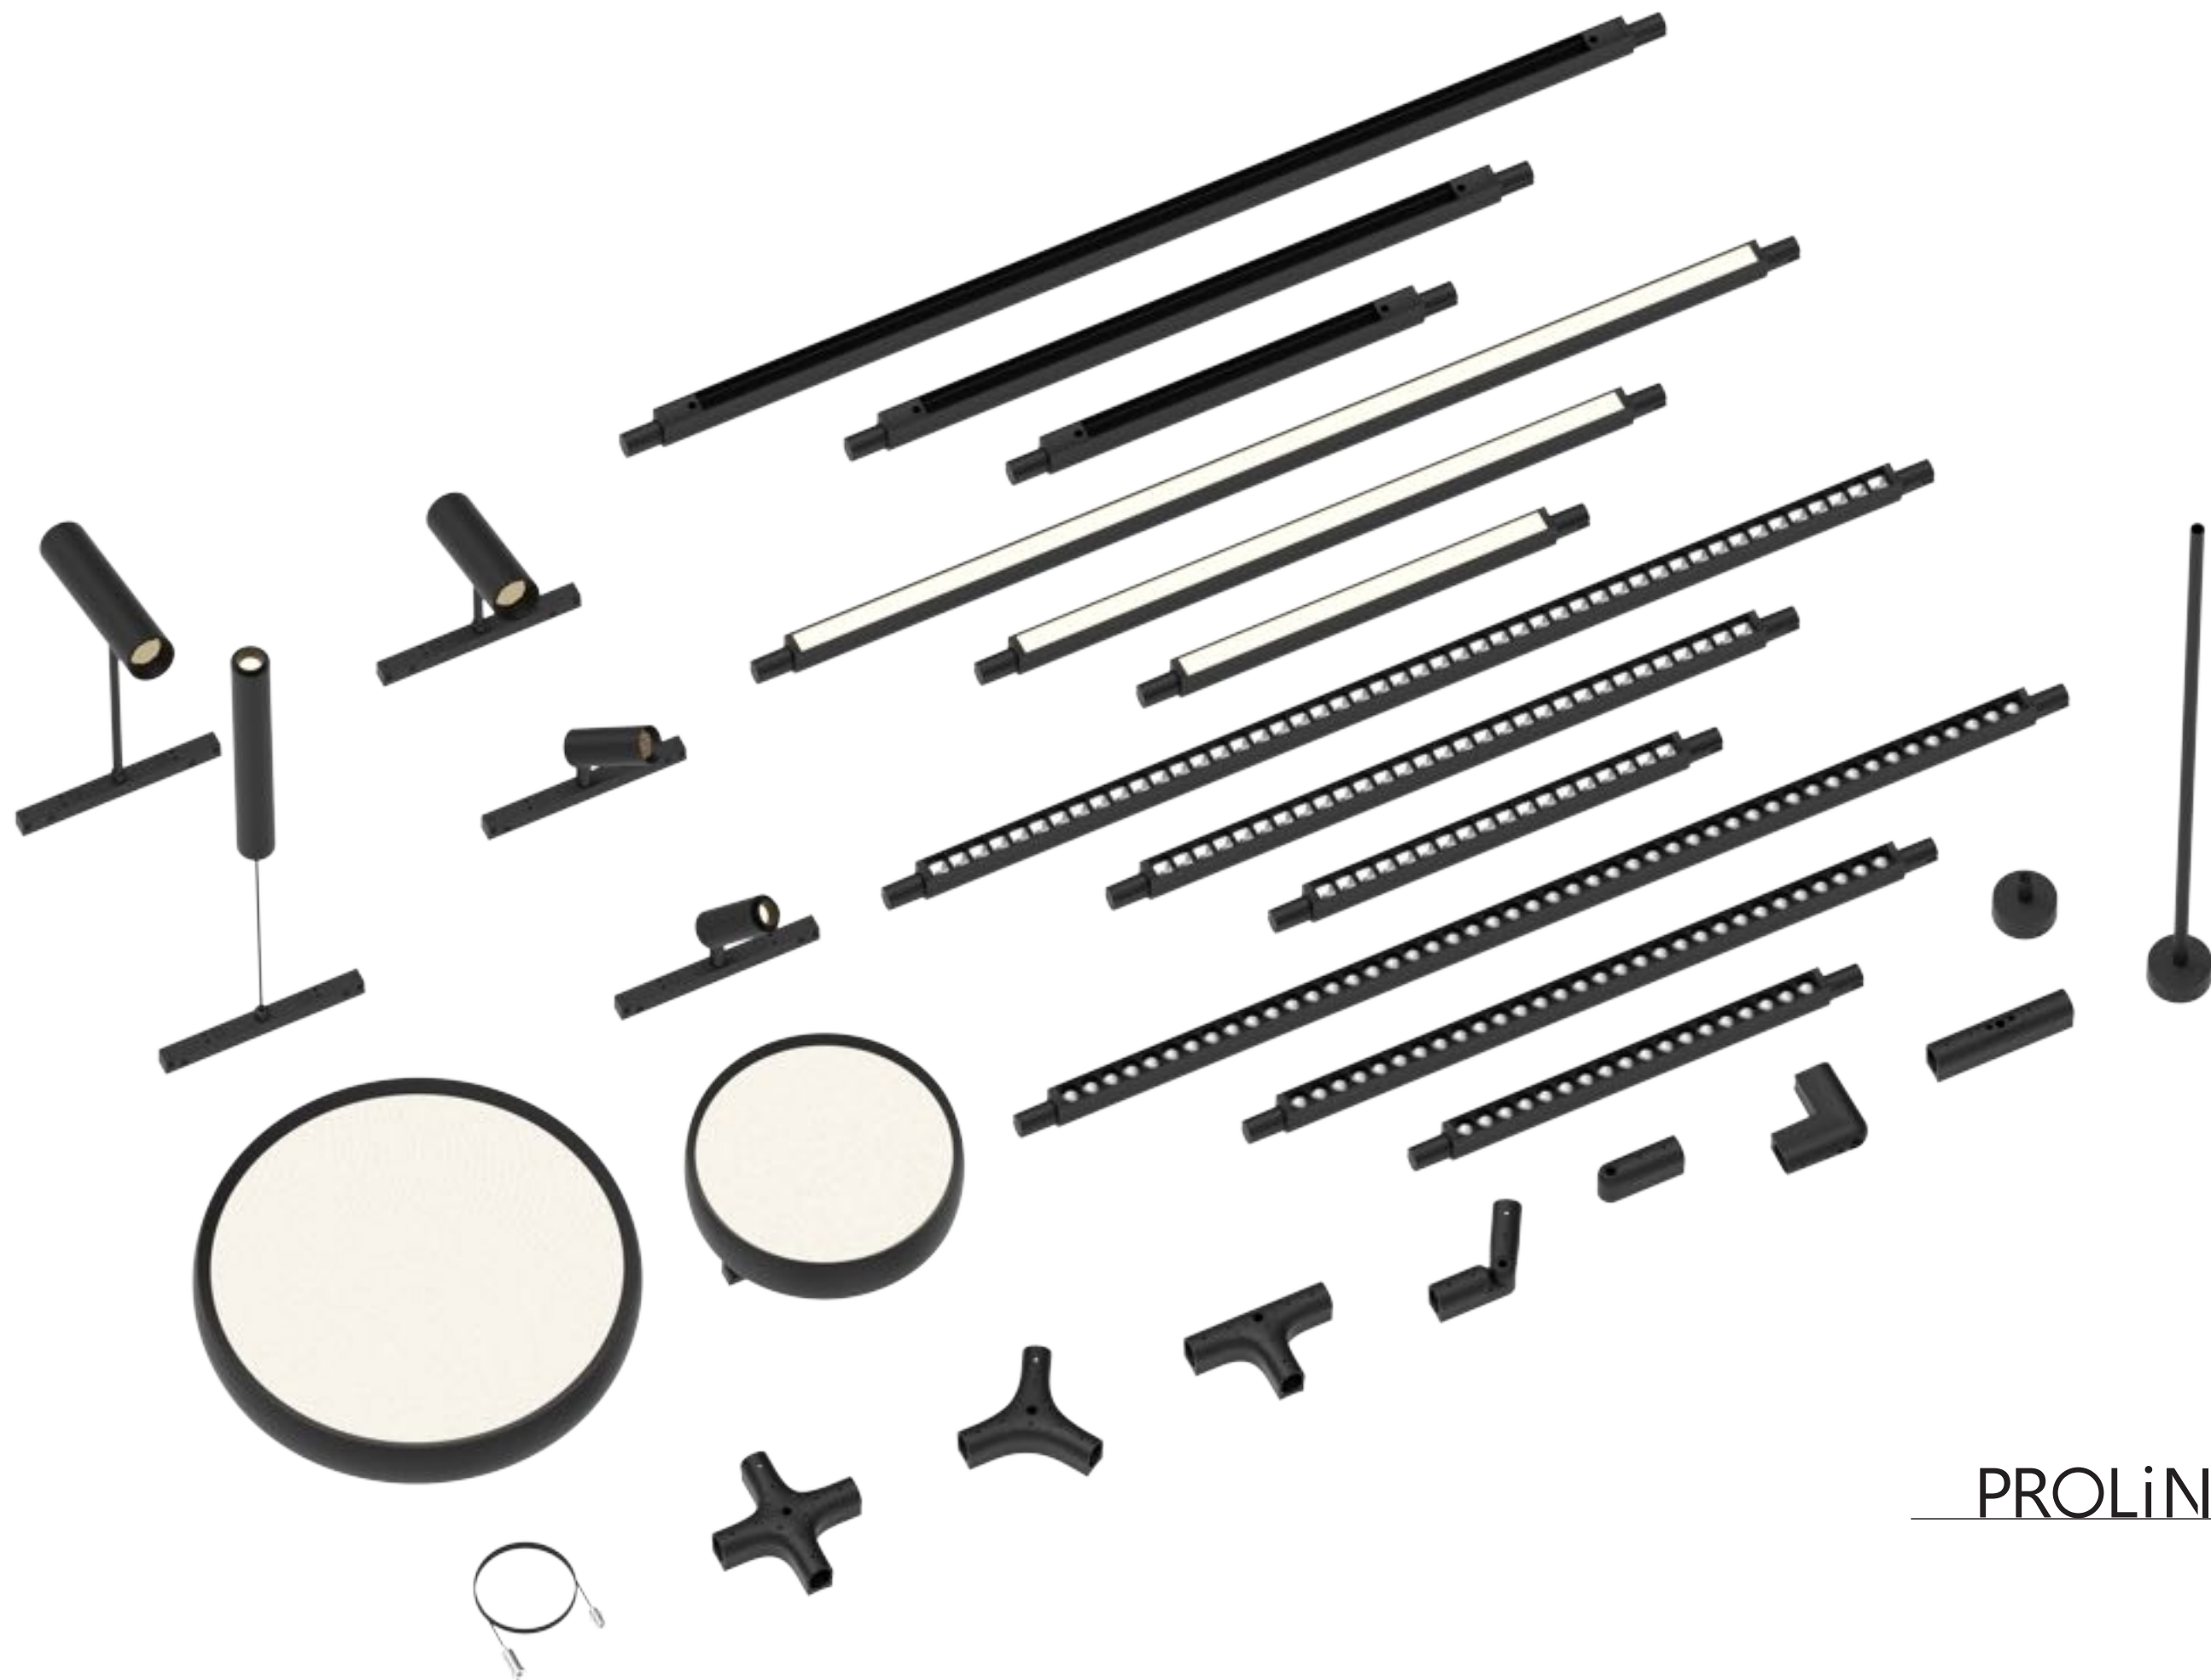
PROLiNK



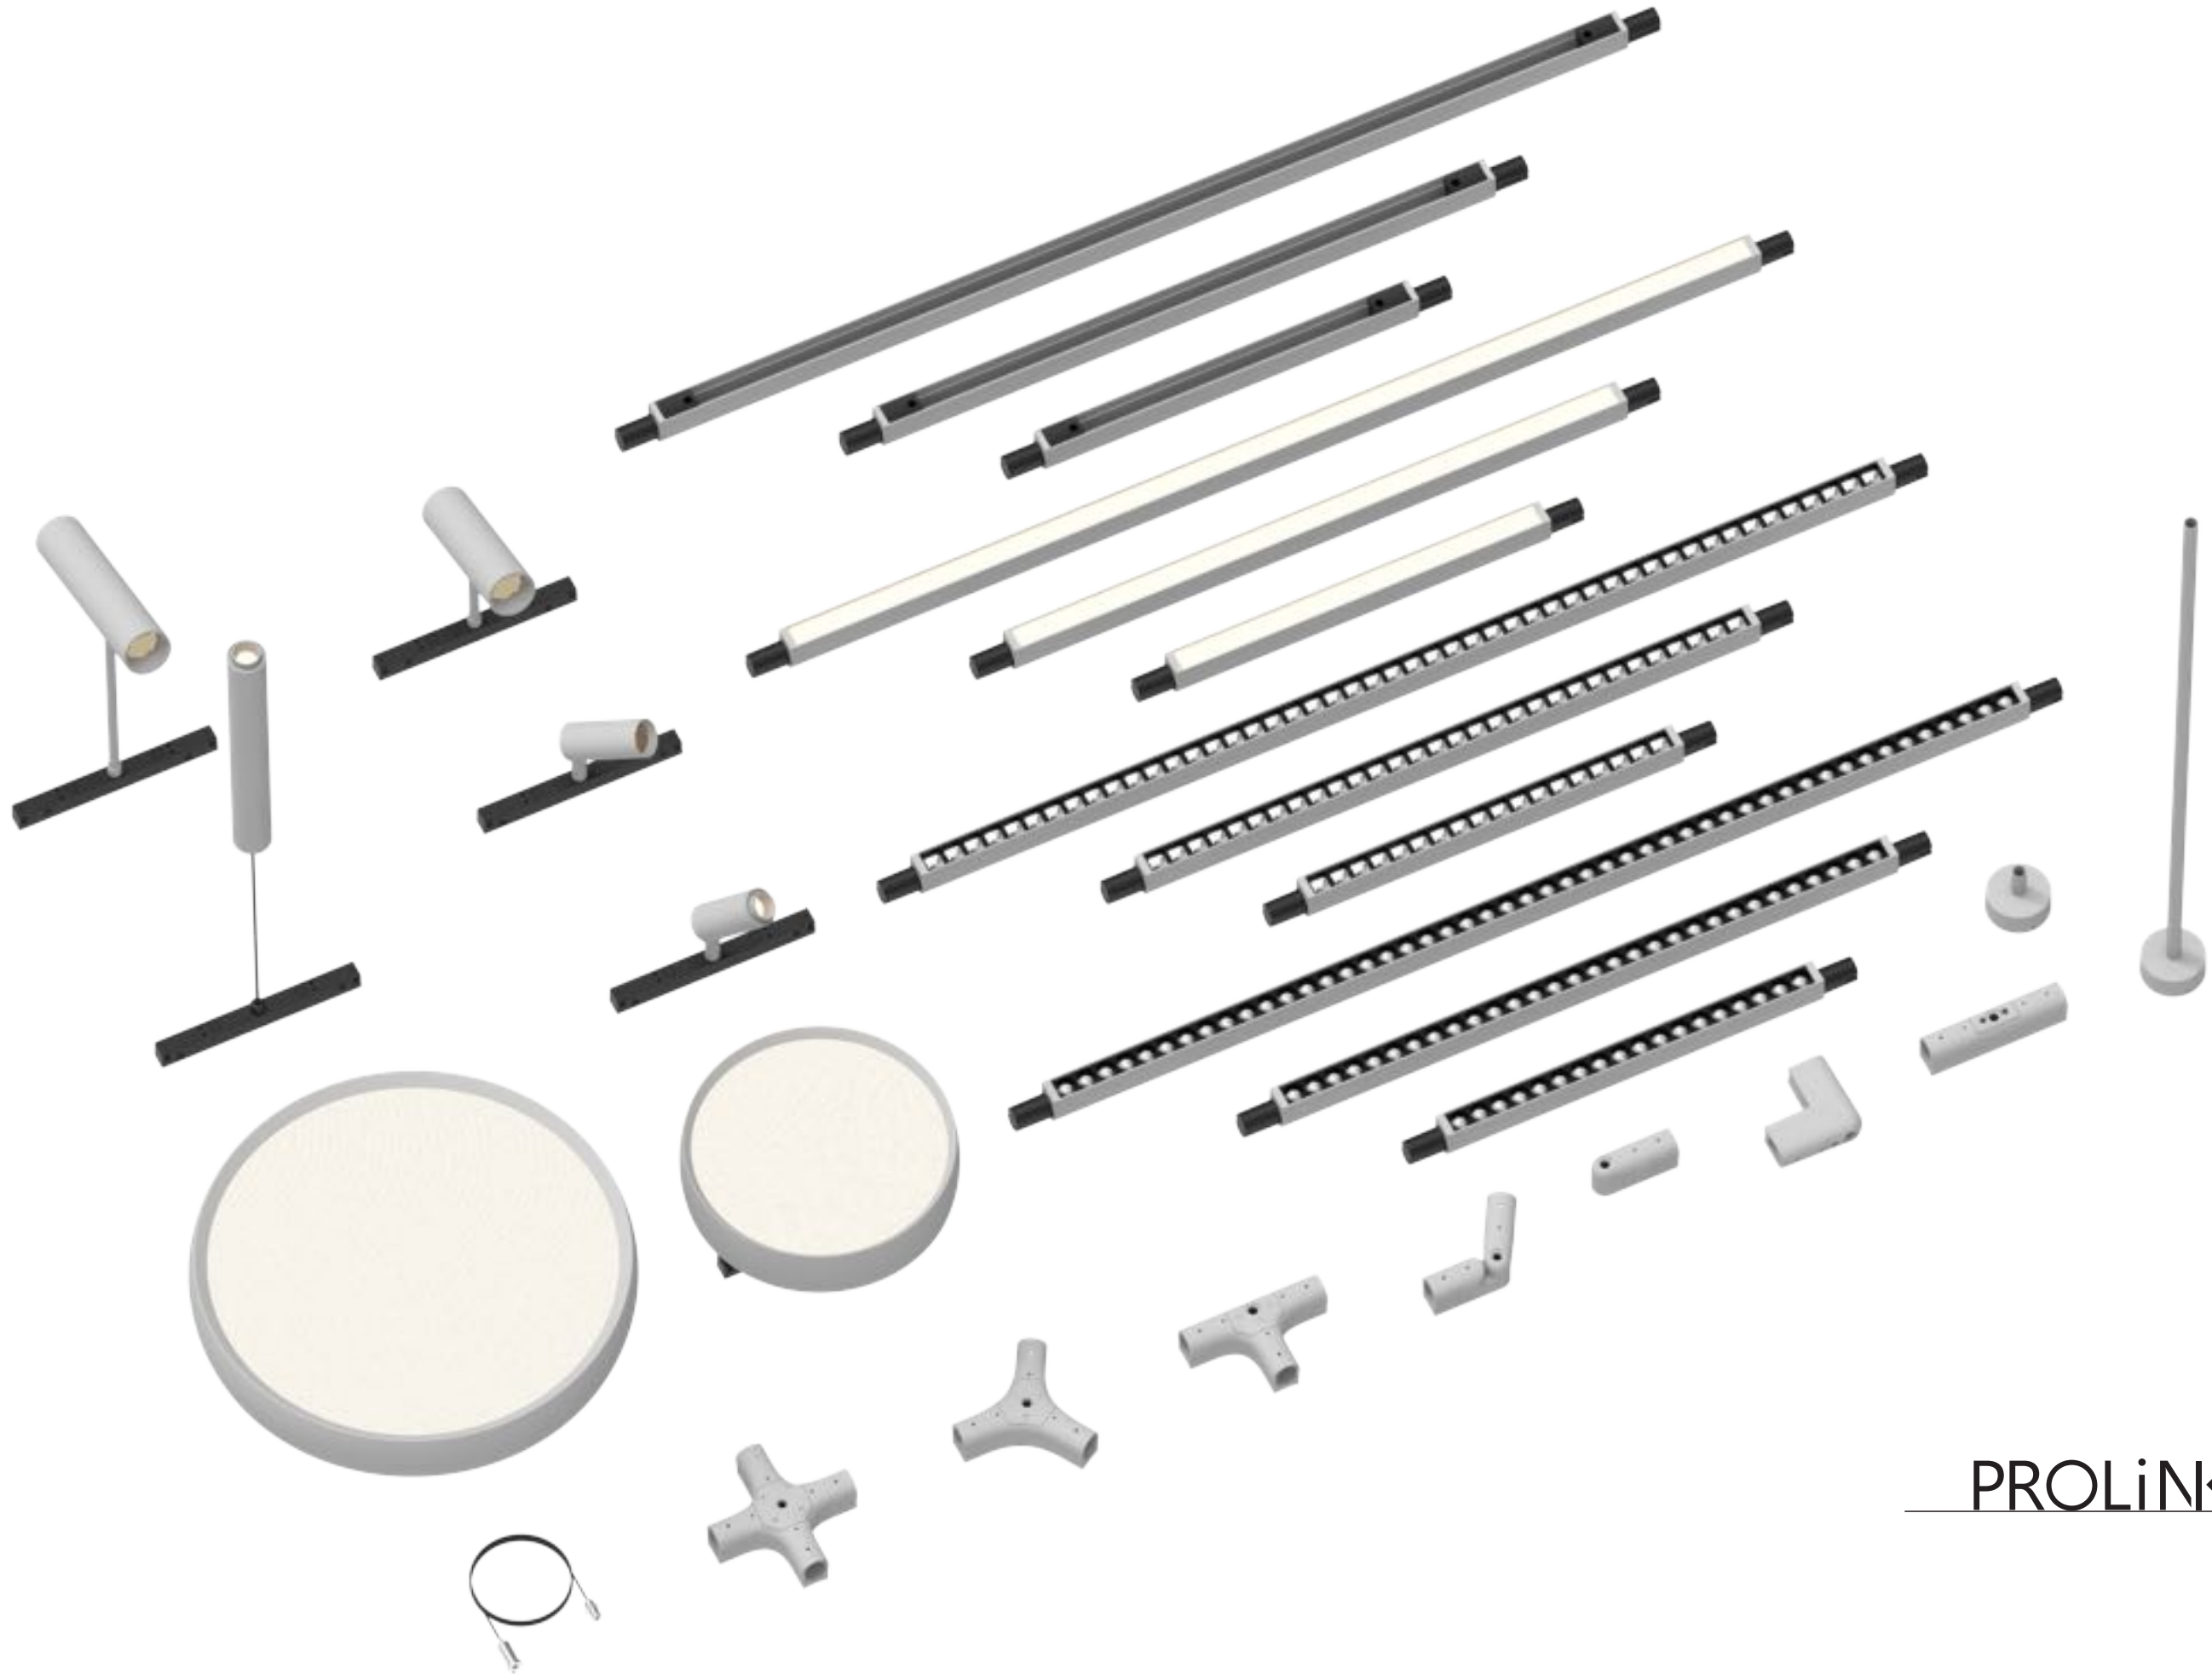
0-10V

TRIAC





PROLiNK



PROLiNK






PROLiNK

NEW!



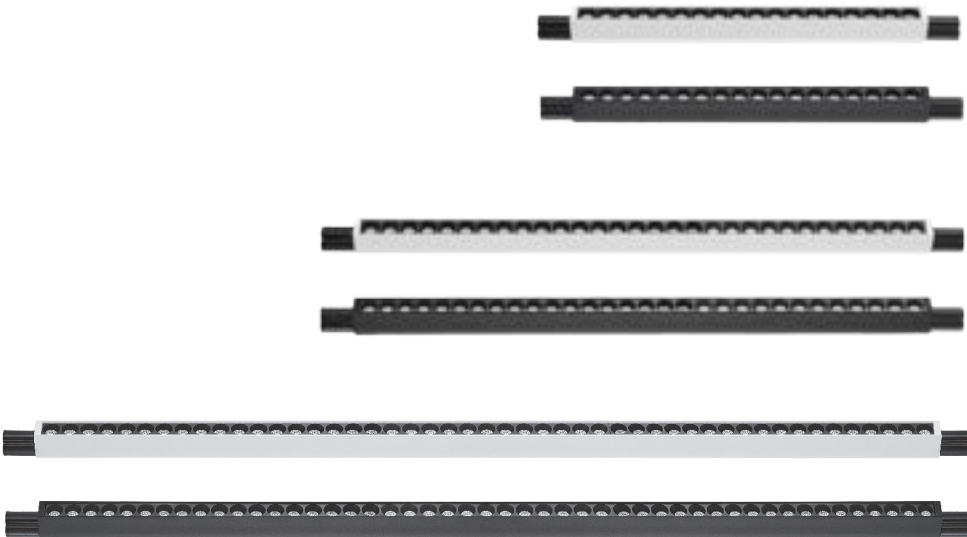
SQUARE REFLECTOR | CODE : XL016A | 48V

SIZE(Unit : mm)	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	15W(SMD)	2700K	90	50°	1200-1350lm
		3000K			
		4000K			
		5000K			
		2700-4000K			
	24W(SMD)	2700K	90	50°	1920-2160lm
		3000K			
		4000K			
		5000K			
		2700-4000K			
	32W(SMD)	2700K	90	50°	2560-2880lm
		3000K			
		4000K			
		5000K			
		2700-4000K			



PROLiNK

NEW!






ROUND
REFLECTOR

CODE :

XL016B

48V

SIZE(Unit : mm)	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	15W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	1200-1350lm
	24W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	1920-2160lm
	32W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	2560-2880lm






PROLiNK

NEW!



LINEAR CODE :
DIFFUSER XL016C 48V

SIZE(Unit : mm)	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	15W(SMD)	2700K	90	110°	1200-1350lm
		3000K			
		4000K			
		5000K			
		2700-4000K			
	24W(SMD)	2700K	90	110°	1920-2160lm
		3000K			
		4000K			
		5000K			
		2700-4000K			
	32W(SMD)	2700K	90	110°	2560-2880lm
		3000K			
		4000K			
		5000K			
		2700-4000K			






PROLiNK

NEW!



TRACK | CODE :
MAGNETIC | XL016M | 48V

SIZE(Unit : mm)	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	377	-	-	-	-
	617	-	-	-	-
	977	-	-	-	-

PROLiNK





PROLiNK



RECESSED
SQUARE REFLECTOR CODE : XS016A 48V

SIZE(Unit : mm)	POWER	CCT	CRI	BEAM ANGLE	LUMEN
445x70 458x79 50	15W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	1200-1350lm
445x107 458x117 50	2×15W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	2400-2700lm
685x70 698x79 50	24W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	1920-2160lm
685x107 698x117 50	2×24W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	3840-4320lm
1045x70 1060x79 50	32W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	2560-2880lm
1045x107 1060x117 50	2×32W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	5120-5760lm



PROLiNK



RECESSED
ROUND REFLECTOR CODE : XS016B 48V

SIZE(Unit : mm)	POWER	CCT	CRI	BEAM ANGLE	LUMEN
445x70 458x79	15W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	1200-1350lm
445x107 458x117	2 × 15W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	2400-2700lm
685x70 698x79	24W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	1920-2160lm
685x107 698x117	2 × 24W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	3840-4320lm
1045x70 1060x79mm	32W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	2560-2880lm
1045x107 1060x117mm	2 × 32W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	5120-5760lm









PROLiNK



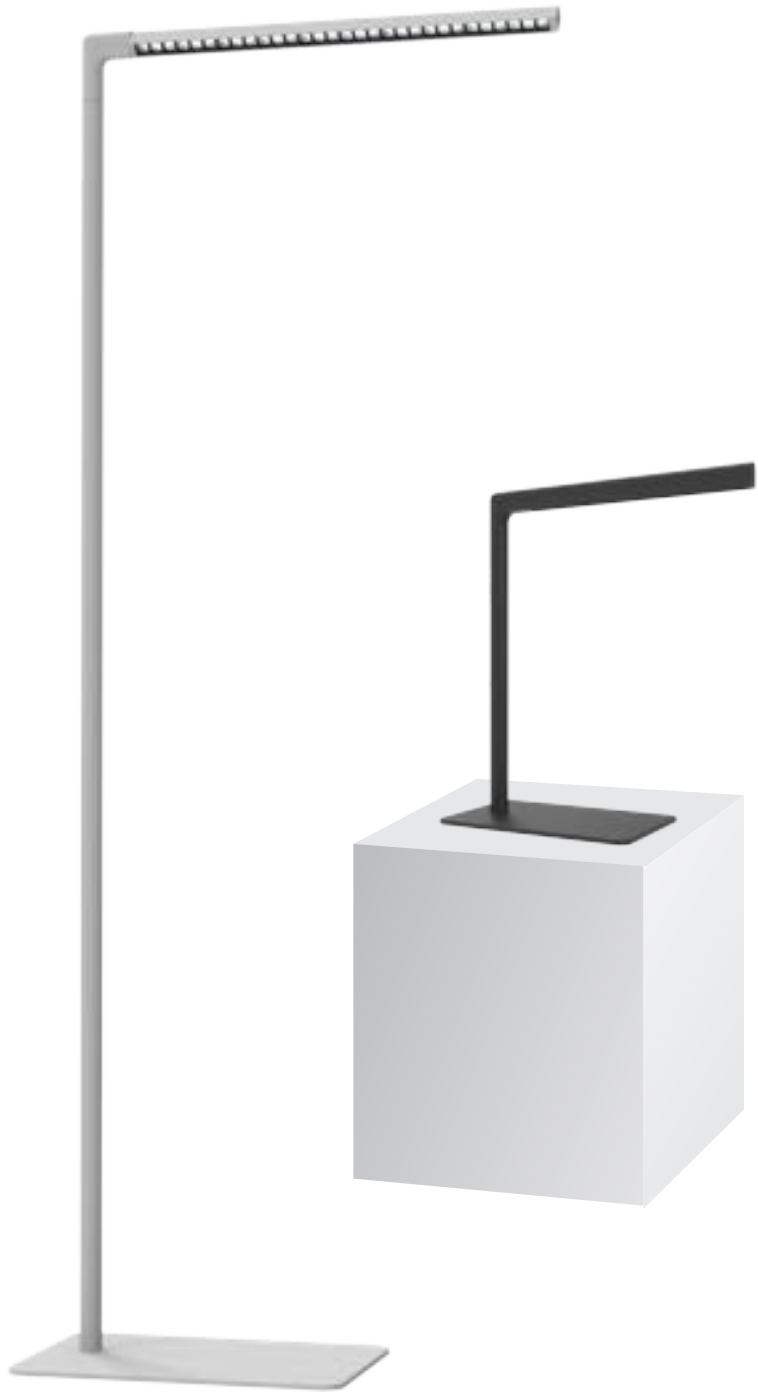
RECESSED
LINEAR
DIFFUSER

CODE :
XS016C

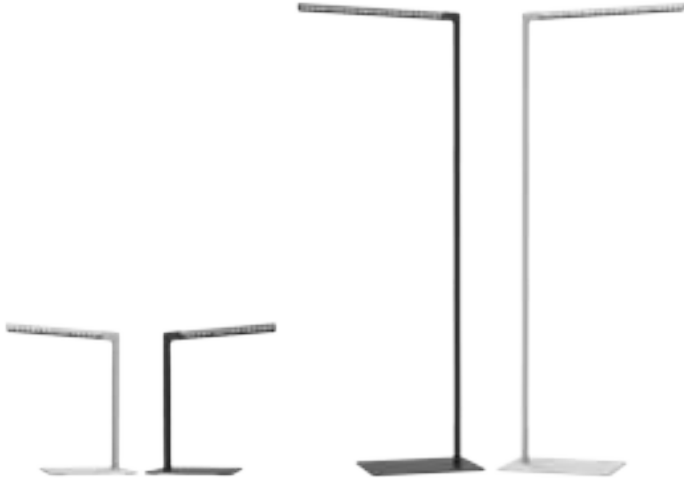
48V

SIZE(Unit : mm)	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	15W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	110°	1200-1350lm
	2 × 15W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	110°	2400-2700lm
	24W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	110°	1920-2160lm
	2 × 24W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	110°	3840-4320lm
	32W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	110°	2560-2880lm
	2 × 32W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	110°	5120-5760lm

PROLiNK





PROLiNK



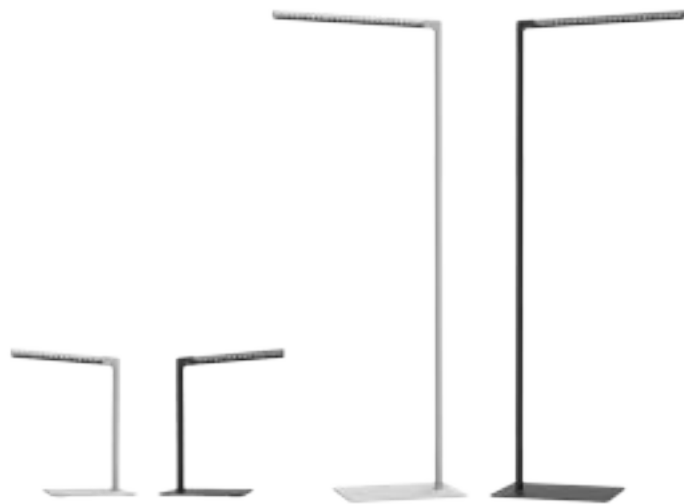
FLOOR LAMP/TABLE LAMP

SQUARE REFLECTOR CODE: XF016A | 24V

SIZE(Unit : mm)	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	15W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	1200-1350lm
	24W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	1920-2160lm





PROLiNK



NEW!

FLOOR LAMP/TABLE LAMP
ROUND
REFLECTOR

CODE :
XF016B | 24V

SIZE(Unit : mm)	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	15W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	1200-1350lm
	24W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	1920-2160lm

PROLiNK








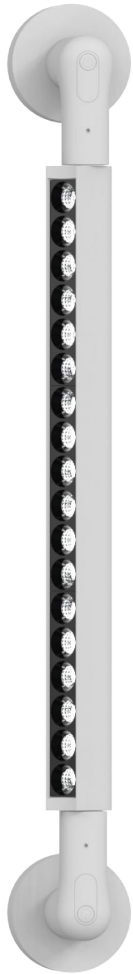
PROLiNK



WALL LAMP

SQUARE REFLECTOR CODE: XW016A 48V

SIZE(Unit : mm)	POWER	CCT	CRI	BEAM ANGLE	LUMEN
70[C]	12W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	960-1080lm
70[C]	18W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	1440-1620lm
70[C]	24W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	1920-2160lm







PROLiNK



WALL LAMP

ROUND REFLECTOR CODE: XW016B 48V

SIZE(Unit : mm)	POWER	CCT	CRI	BEAM ANGLE	LUMEN
70[567x130	12W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	960-1080lm
70[807x130	18W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	1440-1620lm
70[1167x130	24W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	50°	1920-2160lm



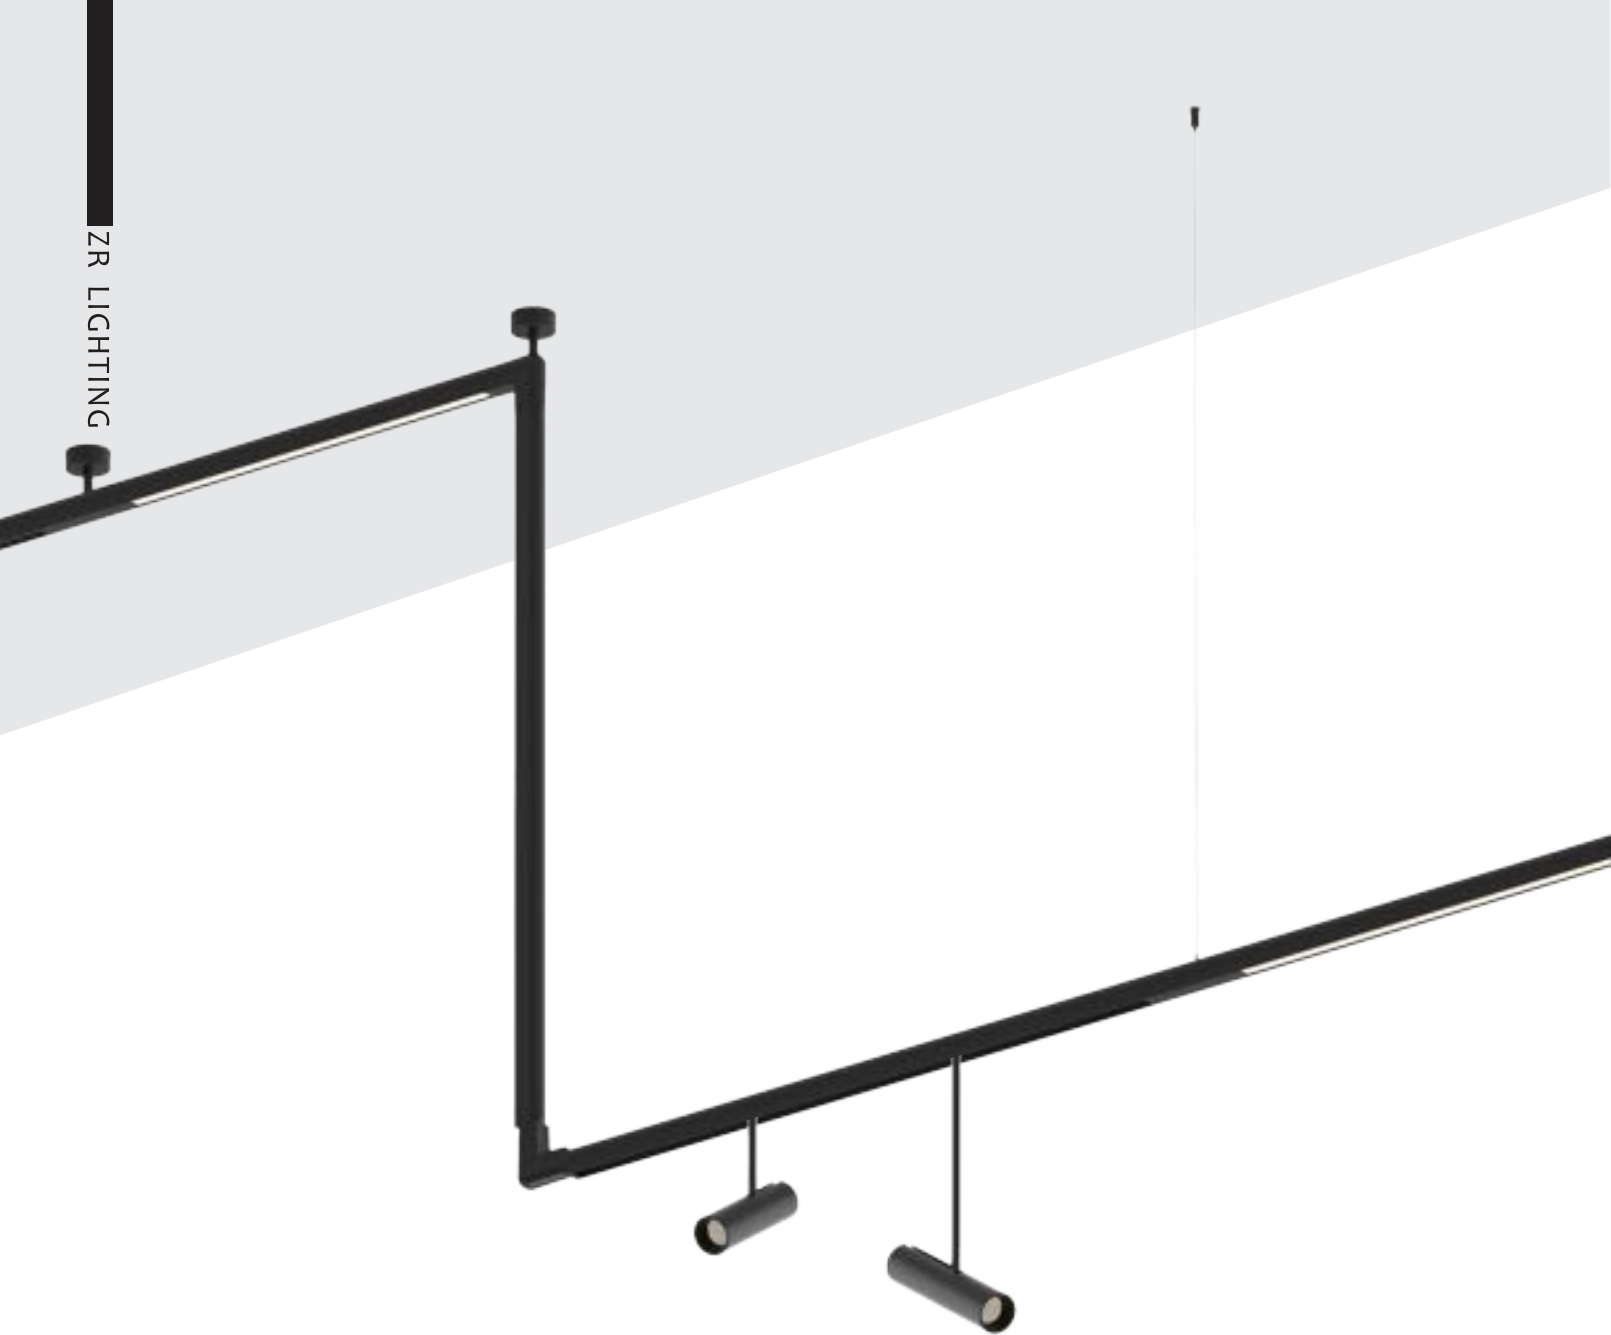
PROLiNK



WALL LAMP

LINEAR CODE: XW016C 48V
DIFFUSER

SIZE(Unit : mm)	POWER	CCT	CRI	BEAM ANGLE	LUMEN
70$\left[\begin{array}{c} \text{---} \end{array} \right]$ 567x130	12W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	110°	960-1080lm
70$\left[\text{---} \right]$ 807x130	18W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	110°	1440-1620lm
70$\left[\text{---} \right]$ 1167x130	24W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	110°	1920-2160lm





ZR LIGHTING

PROLiNK

NEW!



SPOT LIGHT | CODE : 48V
MAGNETIC | M6106

SIZE(Unit : mm)	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	10W(COB)	2700K	90	15°	800-900lm
		3000K		24°	
		4000K		38°	
		5000K		55°	
		2700-4000K			
	15W(COB)	2700K	90	15°	1200-1350lm
		3000K		24°	
		4000K		38°	
		5000K		55°	
		2700-4000K			



PROLiNK

NEW!



M7108-D28-5W



M7108-D28-2x5W



M7108-D35-7W
(Honey Comb)



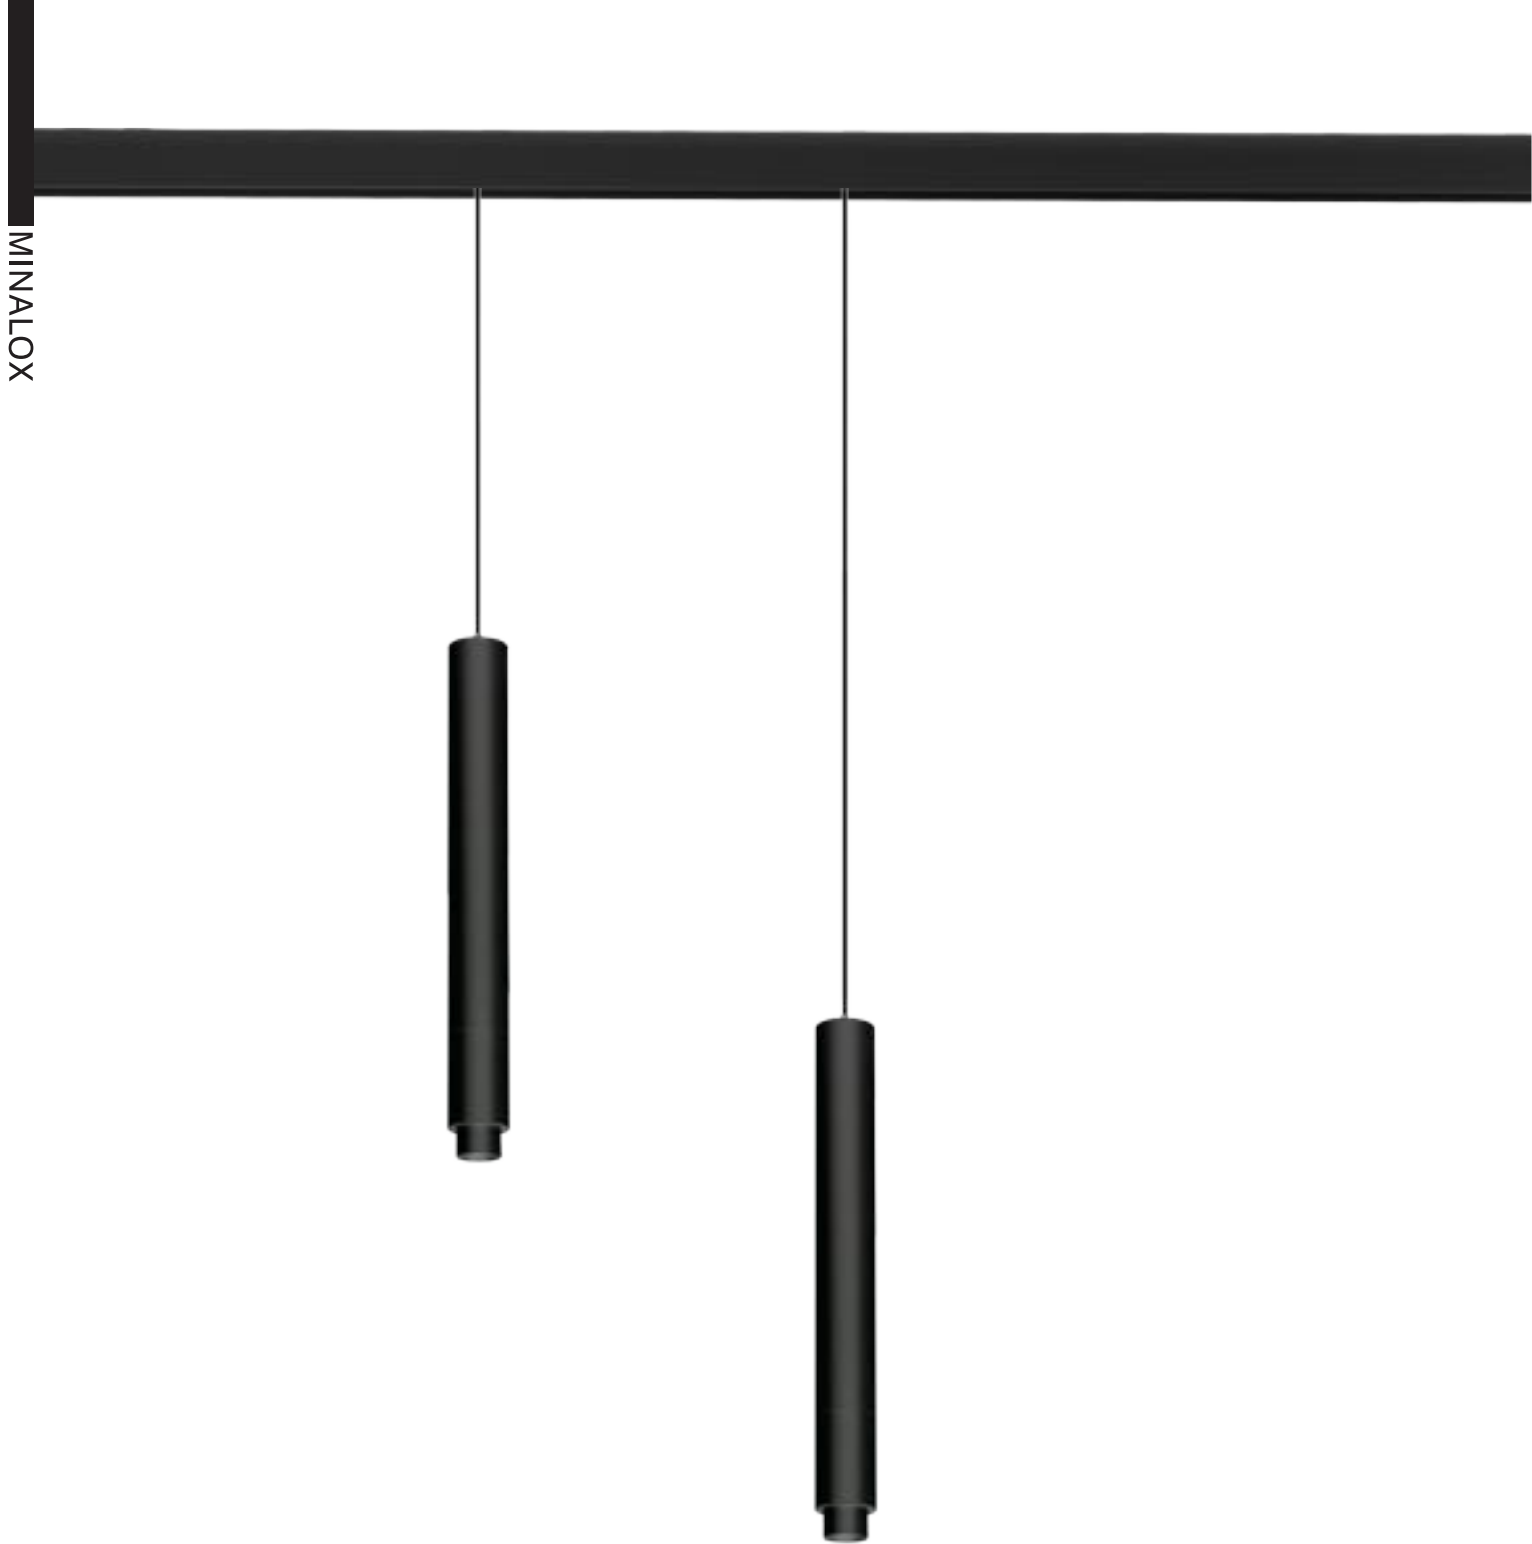
M7108D-D35-7W
(Focusing)



M7108C-D43-7W
(Acrylic)

SPOT LIGHT | 48V
MAGNETIC

SIZE(Unit : mm)	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	M7108-D28	5W(COB)	2700K 3000K 4000K 5000K 2700-4000K	90	15° 24° 38° 55°	400-450lm
	M7108-D28	2×5W(COB)	2700K 3000K 4000K 5000K 2700-4000K	90	15° 24° 38° 55°	800-900lm
	M7108H-D35	7W(COB)	2700K 3000K 4000K 5000K 2700-4000K	90	15° 24° 38° 55°	560-630lm
	M7108C-D43	7W(COB)	2700K 3000K 4000K 5000K 2700-4000K	90	15° 24° 38° 55°	560-630lm
	M7108D-D35	7W(COB)	2700K 3000K 4000K 5000K 2700-4000K	90	10-38°	560-630lm

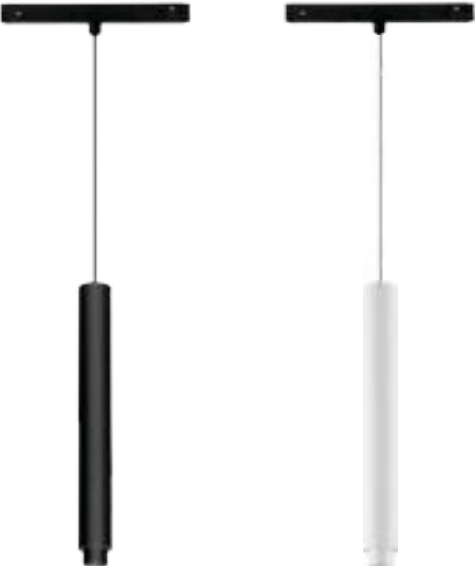


MINALOX


PROLiNK

MINALOX

NEW!




PENDANT | 48V
MAGNETIC

SIZE(Unit : mm)	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	MP7108DL-D35	7W(COB)	2700K 3000K 4000K 5000K 2700-4000K	90	10-38°	560-630lm



PROLiNK

PENDANT | 48V
MAGNETIC

SIZE(Unit : mm)	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	MP3017	10W(SMD)	2700K	90	110°	800-900lm
			3000K			
			4000K			
			5000K			
			2700-4000K			




PROLiNK

NEW!



PENDANT | 48V
MAGNETIC

SIZE(Unit : mm)	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	MP7115	7W(COB)	2700K	90	15°	560-630lm
			3000K		24°	
			4000K		38°	
			5000K		60°	
			2700-4000K			





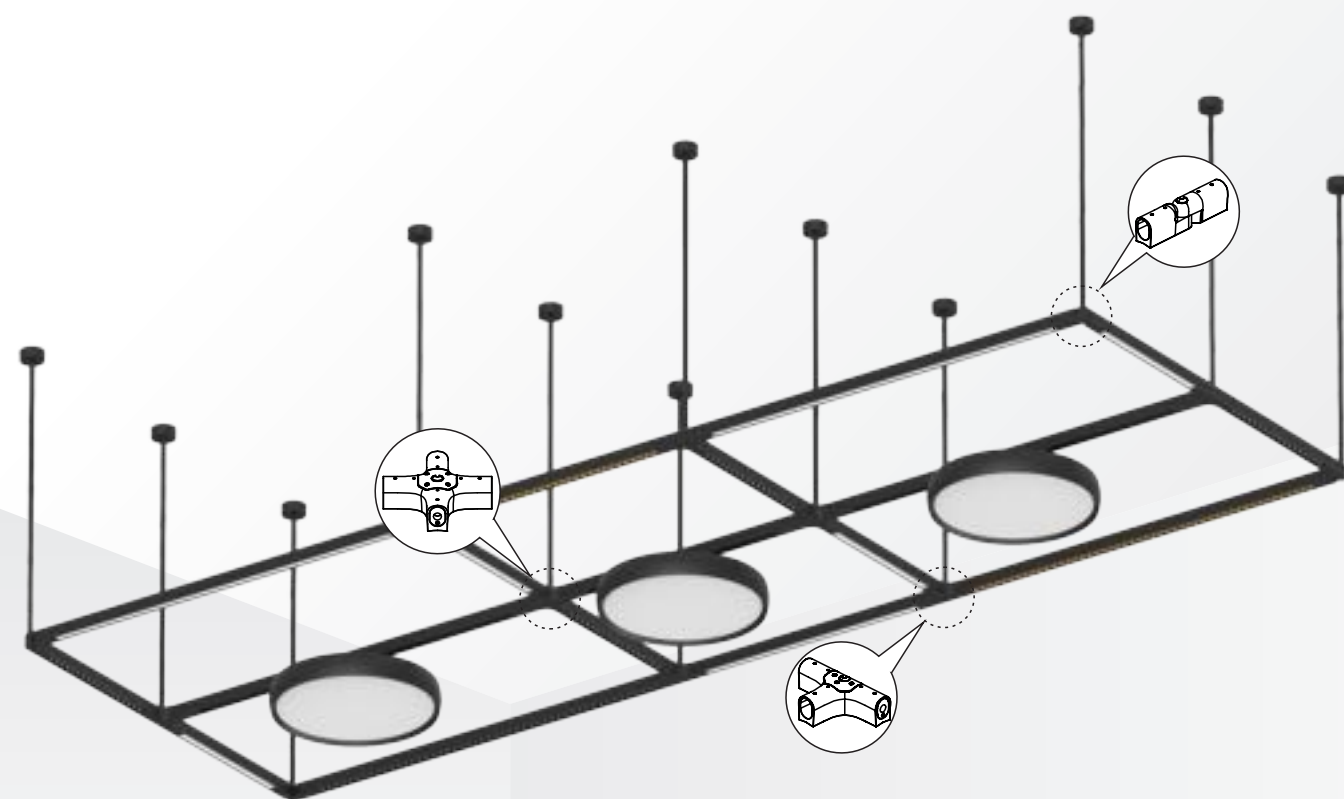
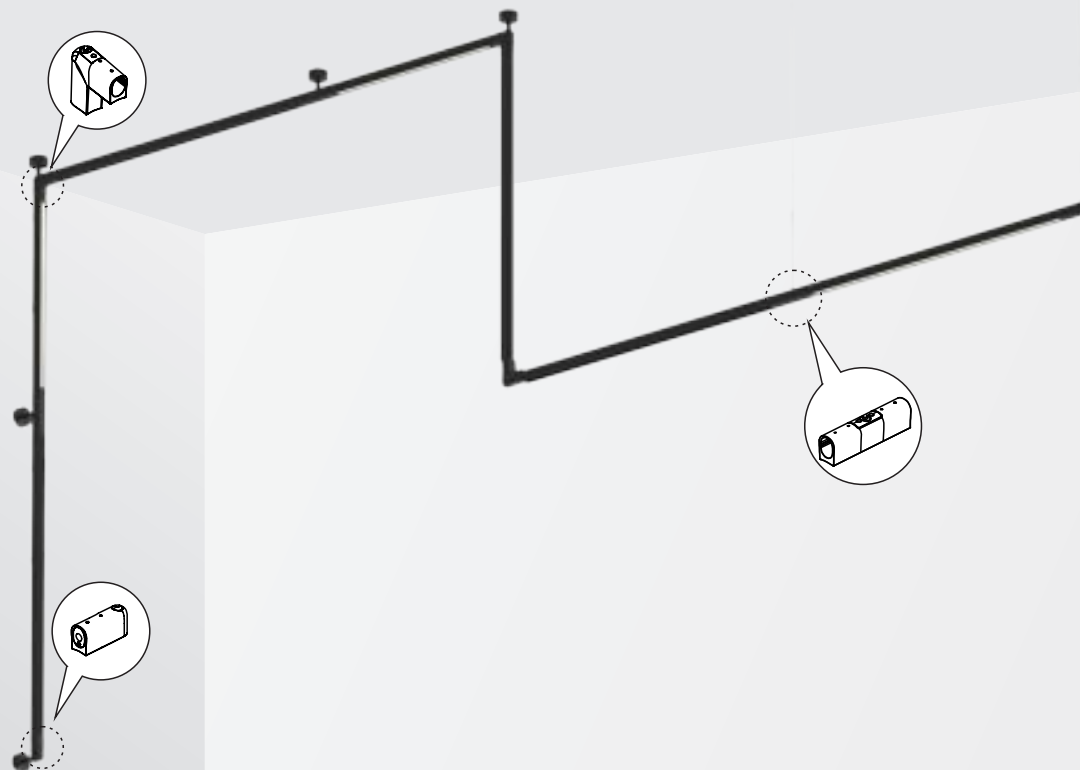
PROLiNK

NEW!



CEILING | 48V
MAGNETIC

SIZE(Unit : mm)	CODE	POWER	CCT	CRI	BEAM ANGLE	LUMEN
	MC3012-D250	20W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	110°	1600-1800lm
	MC3012-D400	30W(SMD)	2700K 3000K 4000K 5000K 2700-4000K	90	110°	2400-2700lm



PROLiNK

MINALOX

NEW!

